

KT-EC-STNY1-WH3RW-SU-XX

EXIT COMBO

DESCRIPTION

LED Exit Combo | Single or Double Facing | Adjustable Dual Heads |
NYC Compliant | High Lumen Output Option Available |
White Finish | 6500K White Light | Surface Mount |
Battery Backup | Built-in Test Switch | 120-277V Input

APPLICATION

UL 924 Compliant Exit Combo with Built-in Red Lettering, New York City Code Compliant. Provides 90+ Minutes of Emergency Power.



Top and Side Light Options Included

PRODUCT FEATURES

- Red LED Lettering Color
- Includes Single or Double Facing Configurations
- Surface Mount - Back, Side, or Top
- Integrated Backup Battery - NiMH
- 90 Minutes of Emergency Power
- Integrated Test Switch & Charge Indicator
- Switchable Top and Side Light Options
- New York City Code Compliant Design
- 20-Gauge Steel Housing and Facings
- Ambient Operating Temperature: 0°C/32°F to 40°C/104°F
- UL Certified for Damp Locations
- Universal J-Box Mounting Pattern
- High Lumen Output Option Available


PERFORMANCE SPECIFICATIONS

Catalog Number	Input Voltage	Input Power	CCT	Lumens	Letter Color	Housing Color	Mounting	Battery Type	Battery Capacity	Recharge Time	Remote Capable
KT-EC-STNY1-WH3RW-SU	120-277V	4.8W	6500K	400	Red	White	Surface: Top, Side, and Back Mount	Nickel-Metal Hydride	1200mAh	24 Hours	No
KT-EC-STNY1-WH3RW-SU-HO				800					2000mAh		

* See Ordering Information and Catalog Number Breakdown for more details.

PHYSICAL SPECIFICATIONS

DUAL HEADS ON TOP

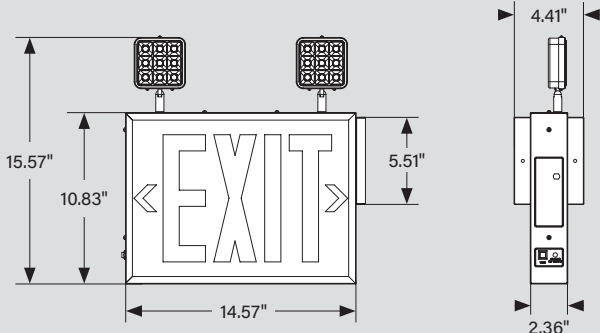


Weight - Normal Lumen Output

Fixture Weight	Carton Weight
7.6 lbs	45.9 lbs

KT-EC-STNY1-WH3RW-SU-XX

EXIT COMBO

PHYSICAL SPECIFICATIONS (CONTINUED)

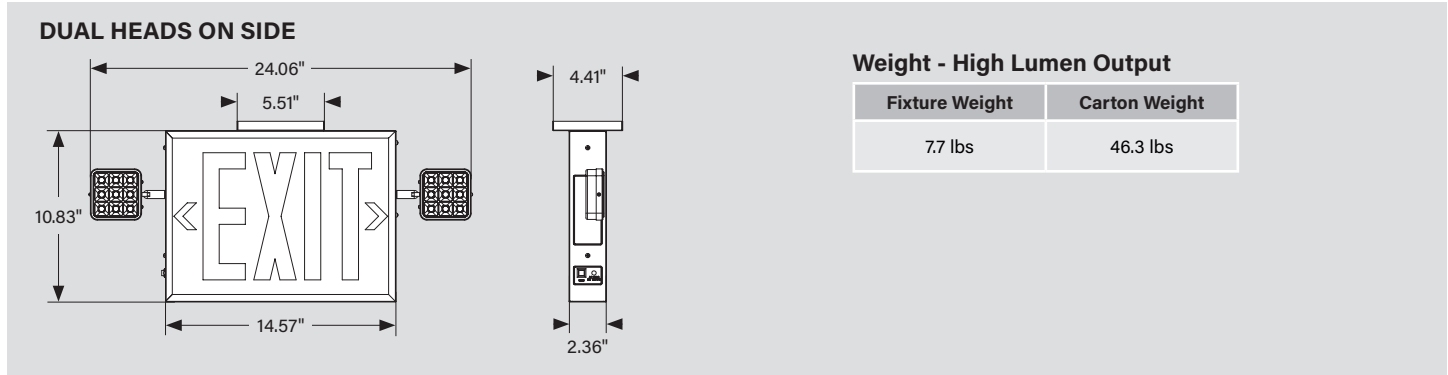


FIELD-ADJUSTABLE FEATURES: CHEVRONS, FACINGS & MOUNTING ORIENTATION

Use of Chevrons

Remove knockout chevron(s) on faceplate, as needed. The diffuser would need to be removed to allow chevron removal. Re-secure diffuser after chevron removal.

FACEPLATE

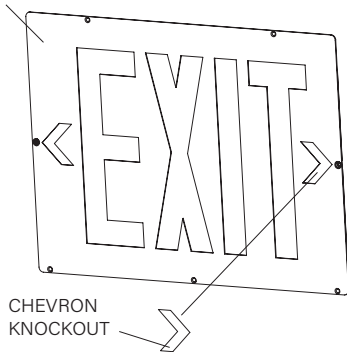

Single or Double-Sided Facing

This fixture ships with two "EXIT" sign faceplates and one back/solid faceplate to allow for either single- or double-sided Exit Sign. Single-sided Exit Sign will use one "EXIT" faceplate and the back/solid faceplate, while double-sided Exit Sign will use two "EXIT" faceplates. All three faceplates are included.

KT-EC-STNY1-WH3RW-SU-XX

EXIT COMBO

MOUNTING OPTIONS


BACK MOUNT



TOP MOUNT



SIDE MOUNT

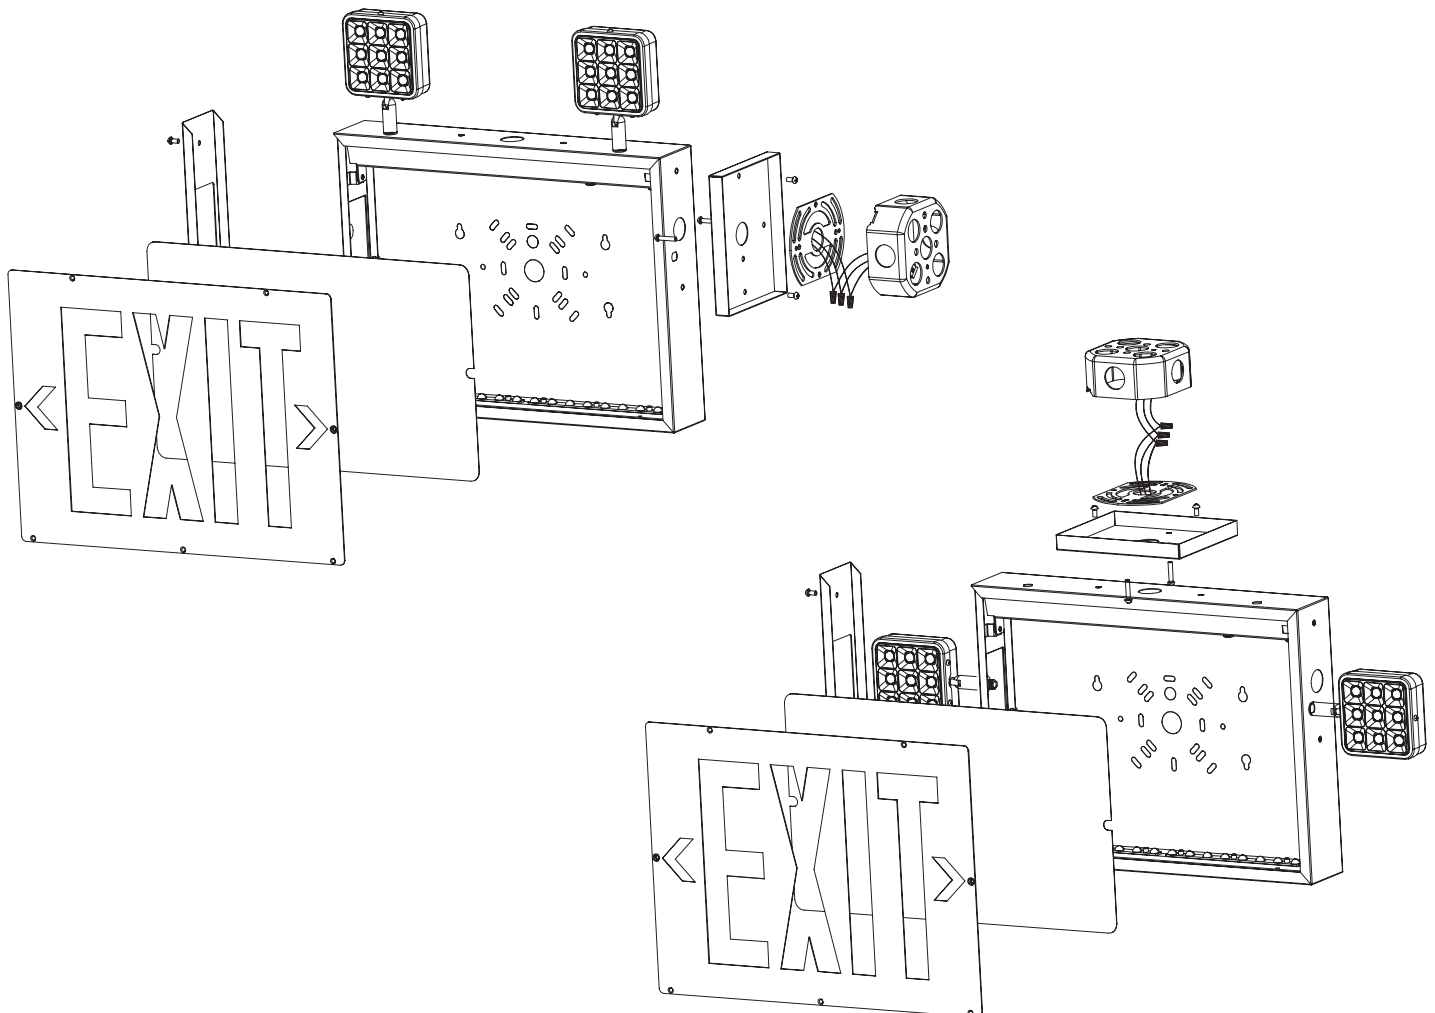


KT-EC-STNY1-WH3RW-SU-XX

EXIT COMBO

SPACING GUIDELINES


KT-EC-STNY1-WH3RW-SU

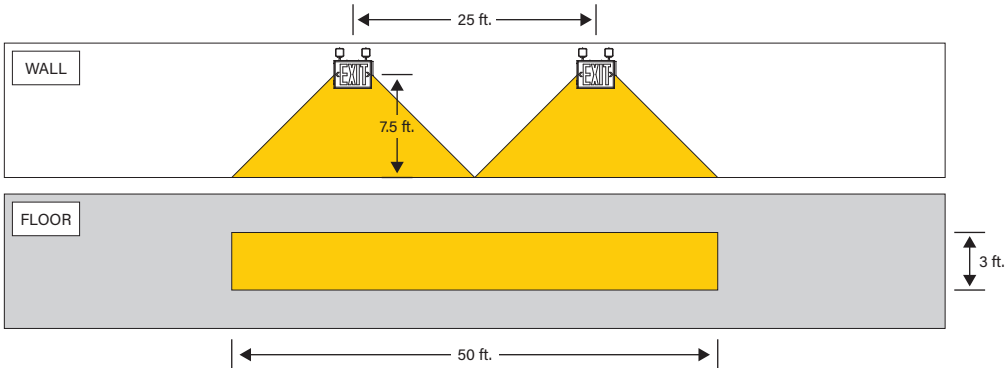

Multiple Unit Spacing	
Room Description	8' x 12' Hallway
Head Orientation	45° Rotation, 55° Tilt
Path of Egress	3' Wide
Illumination	1fc average, 0.1fc minimum

*Spacing guidelines provided are for general reference only. Actual performance will vary based on each installations unique dimensions, wall colors, floor type, and other factors. Please contact lightinglayouts@keystonetech.com for detailed layout assistance needs.

KT-EC-STNY1-WH3RW-SU-HO

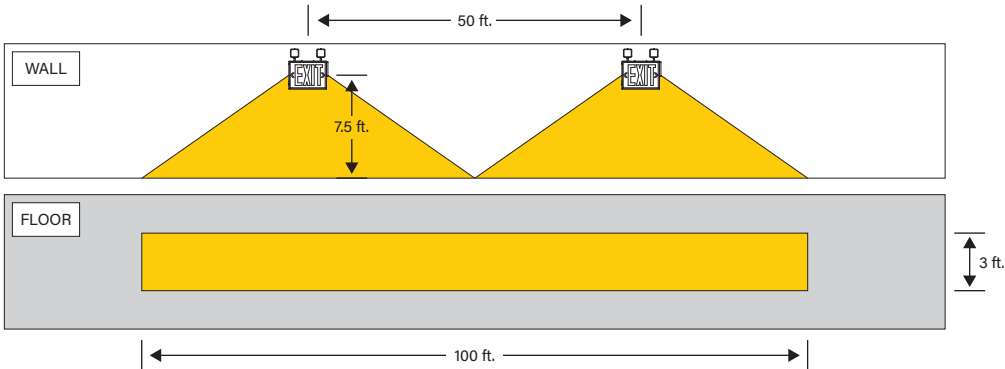

Multiple Unit Spacing	
Room Description	8' x 12' Hallway
Head Orientation	45° Rotation, 65° Tilt
Path of Egress	3' Wide
Illumination	1fc average, 0.1fc minimum

*Spacing guidelines provided are for general reference only. Actual performance will vary based on each installations unique dimensions, wall colors, floor type, and other factors. Please contact lightinglayouts@keystonetech.com for detailed layout assistance needs.


SMART//SAFE®

KT-EC-STNY1-WH3RW-SU-XX

EXIT COMBO

ORDERING INFORMATION

Catalog Number	Lumen Output	UPC	Easy Code
KT-EC-STNY1-WH3RW-SU	400	843654165295	LMM-38
KT-EC-STNY1-WH3RW-SU-HO	800	843654165301	LQX-46

CATALOG NUMBER BREAKDOWN

KT-EC-STNY1-WH3RW-SU-XX

1 2 3 4 5 6 7 8 9 10 11

- 1 Keystone Technologies
- 2 Exit Combo
- 3 Steel - New York City Compliant
- 4 Form Factor 1
- 5 Housing Color
- 6 Facings
- 7 Lettering Color
- 8 Light Color
- 9 Mounting
- 10 Input Voltage
- 11 High Lumen Output

5 Housing Color

WH White

8 Light Color

W White

6 Facings

3 Single and Double

9 Mounting

S Surface Mount

7 Lettering Color

R Red Lettering

10 Input Voltage

U 120-277V

11 Lumen Output

HO High Lumen Output