

KT-EC-TP3-WH3RW-SD

EXIT COMBO

DESCRIPTION

LED Exit Combo | Single or Double Facing | Dual Heads |
Wet Rated | White Finish | 6500K White Light | Surface Mount |
Battery Backup | Built-in Test Switch | 120/277V Input

APPLICATION

UL 924 Compliant Wet Rated Exit Combo with Built-in Red Lettering. Provides 90+ Minutes of Emergency Power.



PRODUCT FEATURES


- Red LED and Diffuser Color
- Includes Single or Double Facing Configurations
- Surface Mount - Back and Side
- Integrated Backup Battery - NiMH - 1200mAh
- 90 Minutes of Emergency Power
- Integrated Test Switch & Charge Indicator
- UL Certified for Wet Locations
- Thermoplastic Housing - UL 94 5VA Flame Rating
- Ambient Operating Temperature: 0°C/32°F to 40°C/104°F
- Universal J-Box Mounting Pattern

PERFORMANCE SPECIFICATIONS

Catalog Number	Input Voltage	Input Power	CCT	Lumens	Letter Color	Housing Color	Mounting	Battery Type	Battery Capacity	Recharge Time	Remote Capable
KT-EC-TP3-WH3RW-SD	120/277V	2.9W (120V) 3.79W (277V)	6500K	300	Red	White	Surface: Side and Back Mount	Nickel-Metal Hydride	1200mAh	24 Hours	No

* See Ordering Information and Catalog Number Breakdown for more details.

PHYSICAL SPECIFICATIONS

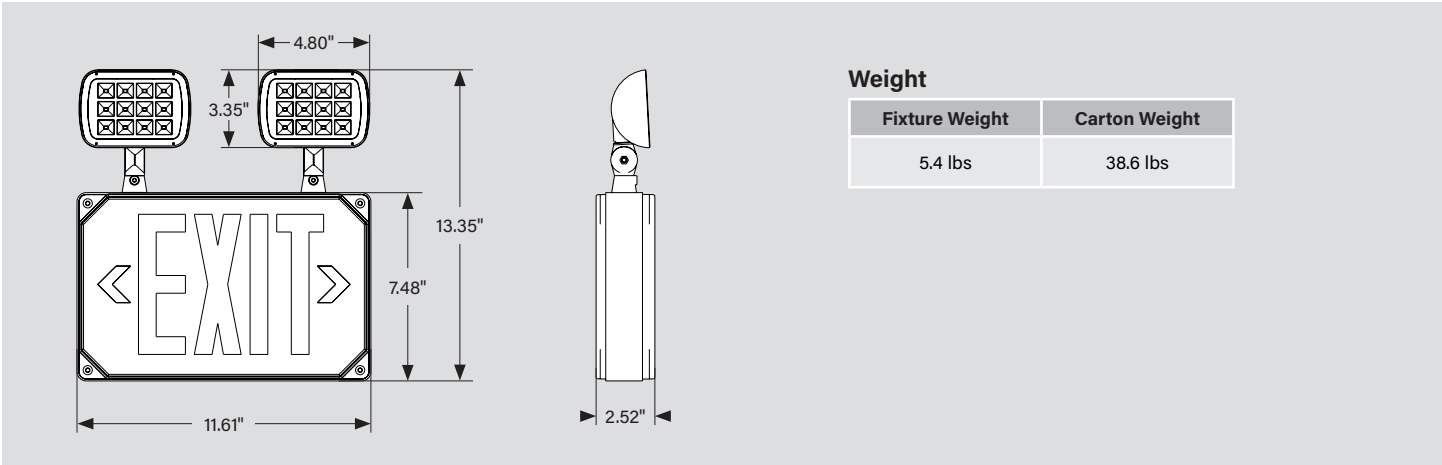

KT-EC-TP3-WH3RW-SD EXIT COMBO

FIELD-ADJUSTABLE FEATURES: CHEVRONS, FACINGS & MOUNTING ORIENTATION


This fixture is equipped with field-adjustable removable chevrons, single (front only) or double (front and back) faceplates, and two mounting options (side or back).

Note: Ensure power is off to the fixture and rechargeable battery is disconnected before making any adjustments.

Use of Chevrons

Remove punchout chevron(s) on faceplate, as needed. The diffuser would need to be removed to allow chevron removal. Re-secure diffuser after chevron removal.

FACEPLATE

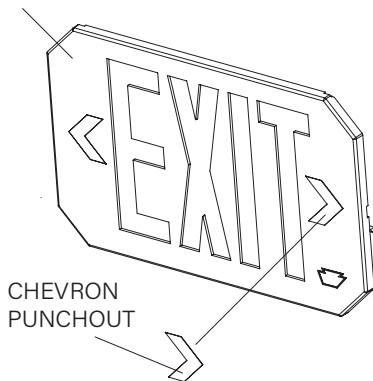

Single or Double-Sided Faceplates

This fixture ships with two "EXIT" sign faceplates and one back/solid faceplate to allow for either single- or double-sided Exit Sign. Single-sided Exit Sign will use one "EXIT" faceplate and the back/solid faceplate, while double-sided Exit Sign will use two "EXIT" faceplates. All three faceplates are included.


KT-EC-TP3-WH3RW-SD EXIT COMBO

MOUNTING OPTIONS

BACK MOUNT




SIDE MOUNT

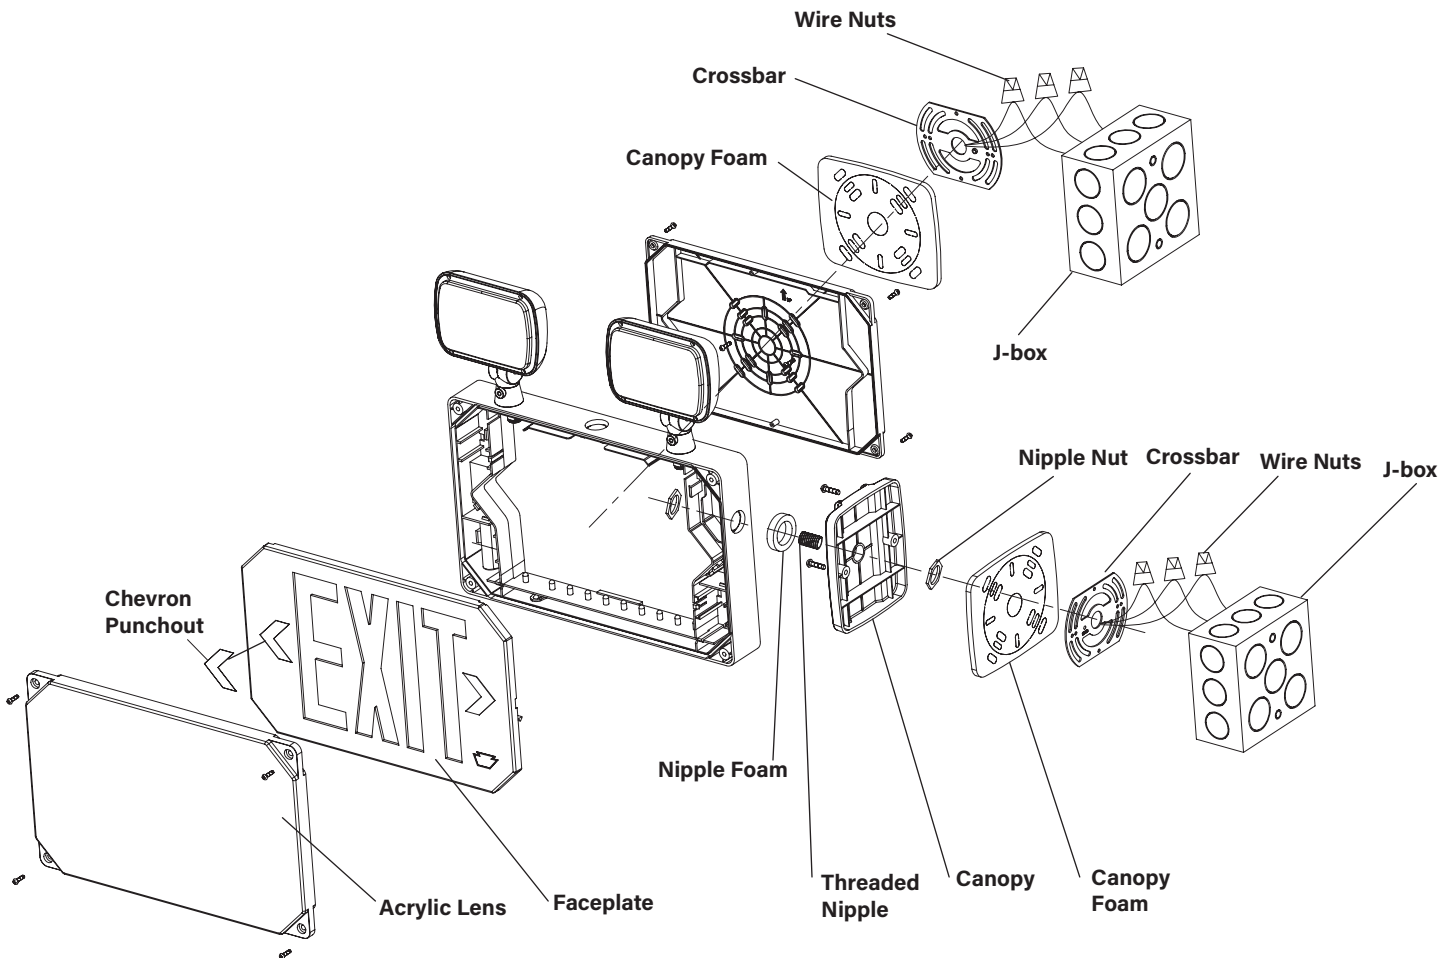

KT-EC-TP3-WH3RW-SD

EXIT COMBO

SPACING GUIDELINES

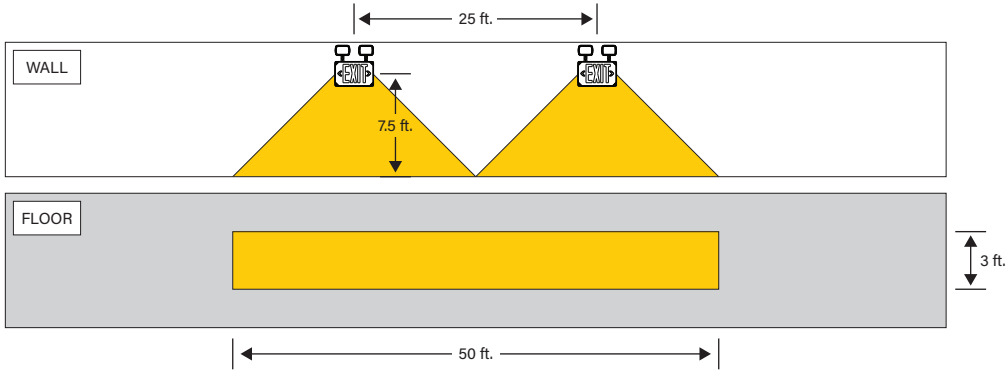

Multiple Unit Spacing	
Room Description	8' x 12' Hallway
Head Orientation	30° Rotation, 45° Tilt
Path of Egress	3' Wide
Illumination	1fc average, 0.1fc minimum

*Spacing guidelines provided are for general reference only. Actual performance will vary based on each installations unique dimensions, wall colors, floor type, and other factors. Please contact lightinglayouts@keystonetech.com for detailed layout assistance needs.

ORDERING INFORMATION

Catalog Number	Finish	UPC	Easy Code
KT-EC-TP3-WH3RW-SD	White	843654165288	TBZ-05

CATALOG NUMBER BREAKDOWN

KT-EC-TP3-WH3RW-SD

1 2 3 4 5 6 7 8 9 10

- 1 Keystone Technologies
- 2 Exit Combo
- 3 Thermo Plastic
- 4 Form Factor 3
- 5 Housing Color
- 6 Facings
- 7 Lettering Color
- 8 Light Color
- 9 Mounting
- 10 Input Voltage

5 Housing Color

WH	White
----	-------

8 Light Color

W	White
---	-------

6 Facings

3	Single and Double
---	-------------------

9 Mounting

S	Surface Mount
---	---------------

7 Lettering Color

RG	Red and Green Lettering
----	-------------------------

10 Input Voltage

D	120/277V
---	----------