

KT-EM-STNC1-WHWL-SU-XX

EMERGENCY LIGHT

DESCRIPTION

Emergency Light | Dual Heads | Chicago & NYC Compliant |
White Finish | 6500K White Light | Surface Mount |
Battery Backup | Built-in Test Switch | 120-277V Input |
High Lumen Output Option Available

APPLICATION

UL 924 Compliant Emergency Light Rated for Damp Locations, New York City and Chicago Code Compliant.
Provides 90 Minutes of Emergency Power.



PRODUCT FEATURES


- 6500K White Light Dual Heads
- Surface Mount - Back
- Integrated Backup Battery
- 90 Minutes of Emergency Power
- Integrated Test Switch & Charge Indicator
- New York City & Chicago Code Compliant Design
- 20-Gauge Steel Housing
- Ambient Operating Temperature: 0°C/32°F to 40°C/104°F
- UL Certified for Damp Locations
- Universal J-Box Mounting Pattern

PERFORMANCE SPECIFICATIONS

Catalog Number	Input Voltage	Input Power	CCT	Lumens	Housing Color	Mounting	Battery Type	Battery Capacity	Recharge Time	Remote Capable
KT-EM-STNC1-WHWL-SU	120-277V	4.5W	6500K	400	White	Surface: Back Mount	Nickel-Metal Hydride	900mAh	24 Hours	No
KT-EM-STNC1-WHWL-SU-HO				800				1500mAh		

* See Ordering Information and Catalog Number Breakdown for more details.

PHYSICAL SPECIFICATIONS

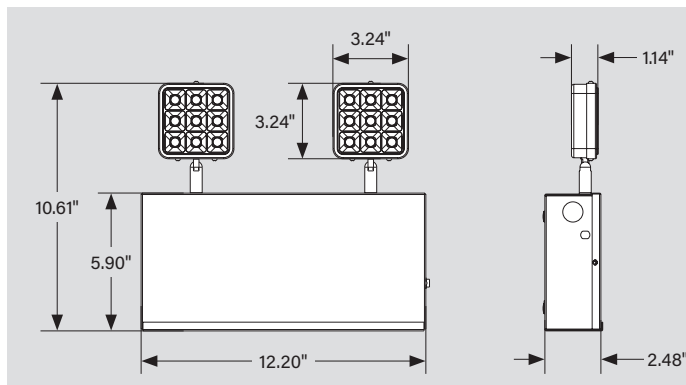


Weight

Catalog Number	Fixture Weight	Carton Weight
KT-EM-STNC1-WHWL-SU	4.2 lbs	20.3 lbs
KT-EM-STNC1-WHWL-SU-HO	4.3 lbs	20.6 lbs


KT-EM-STNC1-WHWL-SU-XX

EMERGENCY LIGHT

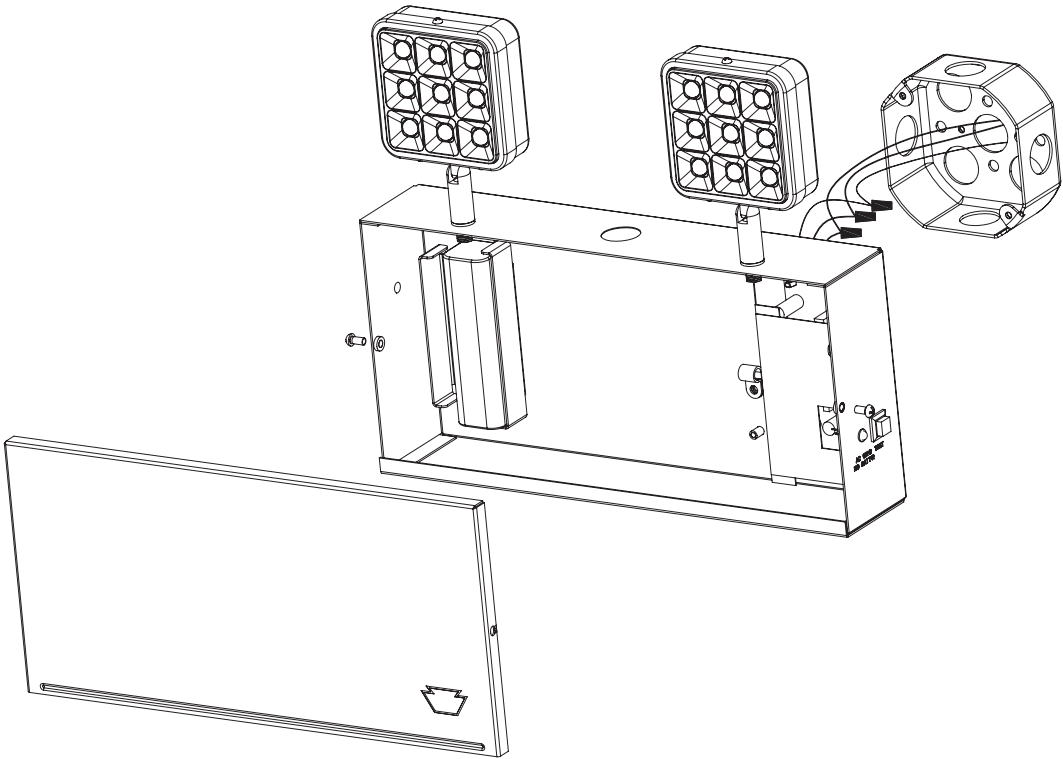

SPACING GUIDELINES

KT-EM-STNC1-WHWL-SU

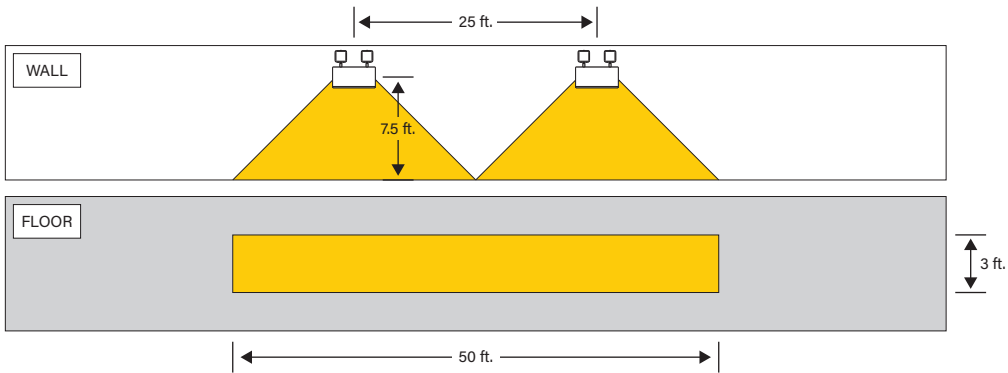

Multiple Unit Spacing	
Room Description	8' x 12' Hallway
Head Orientation	45° Rotation, 55° Tilt
Path of Egress	3' Wide
Illumination	1fc average, 0.1fc minimum


*Spacing guidelines provided are for general reference only. Actual performance will vary based on each installations unique dimensions, wall colors, floor type, and other factors. Please contact lightinglayouts@keystonetech.com for detailed layout assistance needs.

KT-EM-STNC1-WHWL-SU-XX

EMERGENCY LIGHT

SPACING GUIDELINES (CONTINUED)

KT-EM-STNC1-WHWL-SU-HO

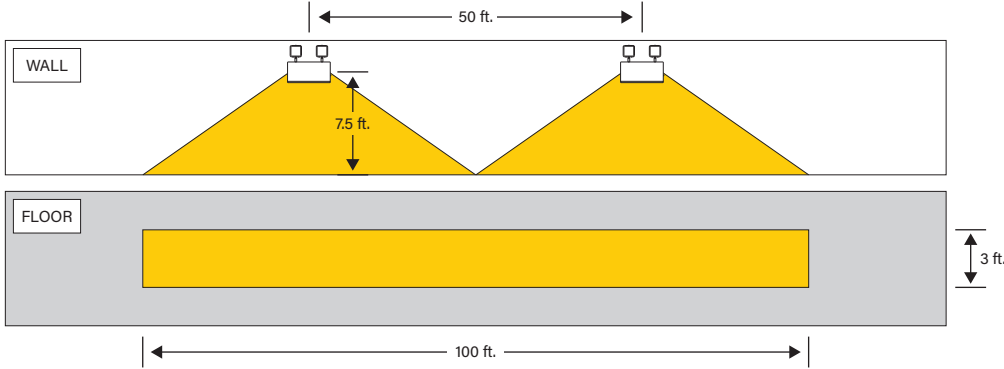

Multiple Unit Spacing	
Room Description	8' x 12' Hallway
Head Orientation	45° Rotation, 65° Tilt
Path of Egress	3' Wide
Illumination	1fc average, 0.1fc minimum

*Spacing guidelines provided are for general reference only. Actual performance will vary based on each installations unique dimensions, wall colors, floor type, and other factors. Please contact lightinglayouts@keystonetech.com for detailed layout assistance needs.

ORDERING INFORMATION

Catalog Number	Lumen Output	UPC	Easy Code
KT-EM-STNC1-WHWL-SU	400	843654165226	BEA-26
KT-EM-STNC1-WHWL-SU-HO	800	843654165233	OSS-40

CATALOG NUMBER BREAKDOWN

KT-EM-STNC1-WHWL-SU-XX

1 2 3 4 5 6 7 8 9

1 Keystone Technologies

2 Emergency Light

3 Steel - NYC & Chicago Compliant

4 Form Factor 1

5 Housing Color

6 Light Color

7 Mounting

8 Input Voltage

9 High Lumen Output

5 Housing Color

WH White

6 Light Color

WL White Light

7 Mounting

S Surface Mount

8 Input Voltage

U 120-277V

9 Lumen Output

HO High Output