

KT-EM-RX2-SVWL-SL

EMERGENCY LIGHT

DESCRIPTION

Emergency Light | Single or Dual Heads | Wet Rated |
Silver Finish | 6500K White Light | Surface Mount |
Low Voltage Input

APPLICATION

UL 924 Compliant Emergency Light Remote Head Rated for
Wet Locations.



PRODUCT FEATURES

- 6500K White Light Single and Dual Heads
- Surface Mount - Back
- Thermoplastic Housing - UL 94 5VA Flame Rating
- UL Certified for Wet Locations
- Ambient Operating Temperature: 0°C/32°F to 40°C/104°F


PERFORMANCE SPECIFICATIONS

Catalog Number	Input Voltage	Input Power	CCT	Lumens	Housing Color	Mounting
KT-EM-RS2-SVWL-SL	Low Voltage - 3.6V	1.2W	6500K	100	Silver	Surface: Back Mount
KT-EM-RD2-SVWL-SL		2.4W		200		

* See Ordering Information and Catalog Number Breakdown for more details.

PHYSICAL SPECIFICATIONS

SINGLE HEAD

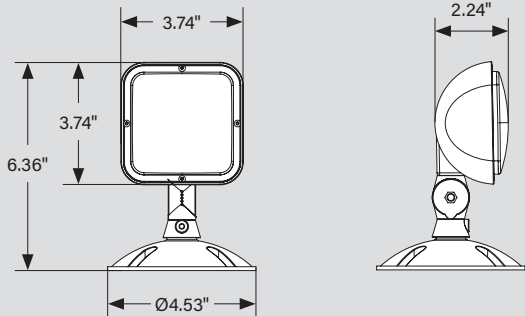

Weight



Fixture Weight	Carton Weight
0.6 lbs	9.2 lbs

KT-EM-RX2-SVWL-SL

EMERGENCY LIGHT

PHYSICAL SPECIFICATIONS

DUAL HEAD

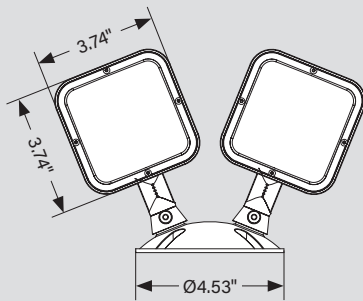

Weight

Fixture Weight	Carton Weight
0.9 lbs	15.3 lbs

ORDERING INFORMATION

Catalog Number	Heads	Finish	UPC	Easy Code
KT-EM-RS2-SVWL-SL	Single	Silver	843654165202	QIW-93
KT-EM-RD2-SVWL-SL	Dual		843654165219	INV-73

CATALOG NUMBER BREAKDOWN

KT-EM-RX2-SVWL-SL

1 2 3 4 5 6 7 8

- 1 Keystone Technologies
- 2 Emergency Light
- 3 Remote Head
- 4 Form Factor 2
- 5 Housing Color
- 6 Light Color
- 7 Mounting
- 8 Input Voltage

3 Remote Head

RS	Remote Single Head
RD	Remote Double Head

5 Housing Color

SV	Silver
----	--------

7 Mounting

S	Surface Mount
---	---------------

6 Light Color

WL	White Light
----	-------------

8 Input Voltage

L	Low Voltage
---	-------------