

KT-CAB-XA-UNV

CROSS ARM BRACKET

DESCRIPTION



Cross arm bracket for SLFLED fixtures | For use on 4" square poles or larger



PHYSICAL SPECIFICATIONS

CROSS ARM BRACKET



Catalog Number	Description
KT-CAB-2A-UNV	Galvanized cross arm bracket Compatible with SLFLED fixtures 2 fixture maximum Universal mounting For use on wood, steel, and concrete poles MOUNTING HARDWARE NOT INCLUDED

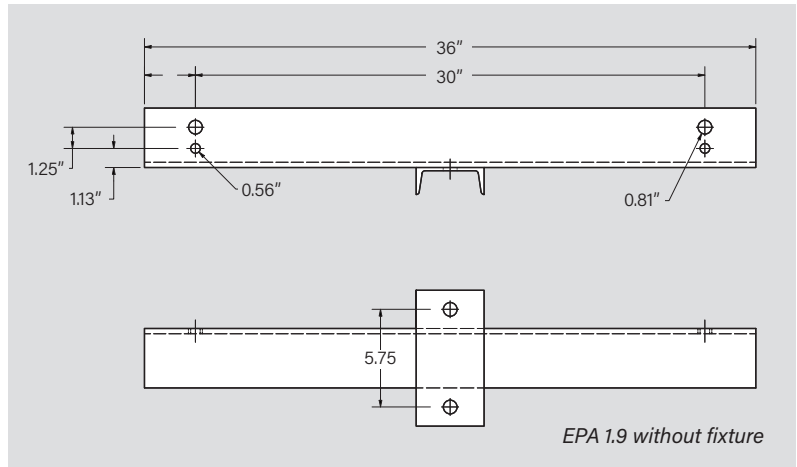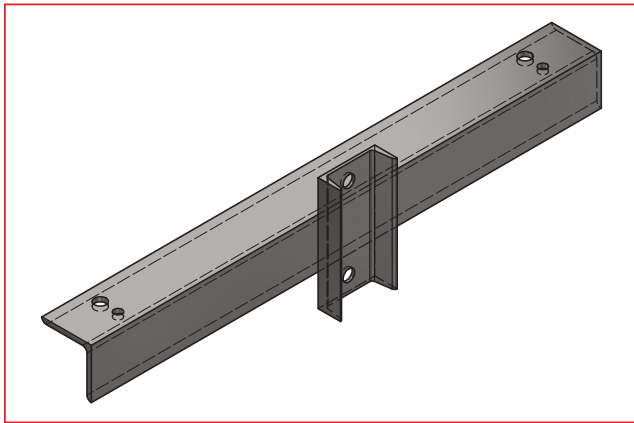

Wind Zone	Max Weight per Fixture	Max EPA per Fixture
100 MPH	75 lbs.	4 ft²
120 MPH	75 lbs.	4 ft²

CROSS ARM BRACKET

Catalog Number	Description
KT-CAB-4A-UNV	Galvanized cross arm bracket Compatible with SLFLED fixtures 4 fixture maximum Universal mounting For use on wood, steel, and concrete poles MOUNTING HARDWARE NOT INCLUDED

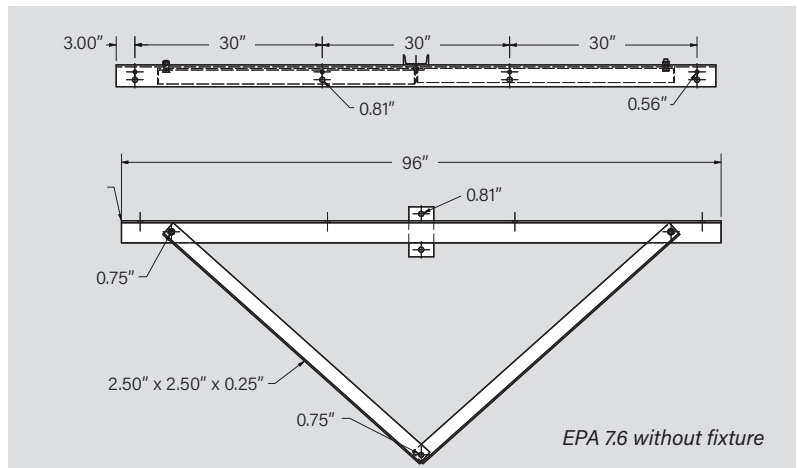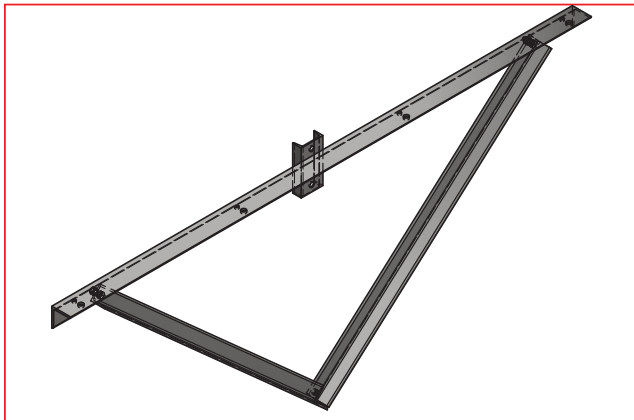

Wind Zone	Max Weight per Fixture	Max EPA per Fixture
100 MPH	55 lbs.	2.5 ft²
120 MPH	55 lbs.	2.5 ft²


KT-CAB-XA-UNV

CROSS ARM BRACKET

PHYSICAL SPECIFICATIONS (CONTINUED)

CROSS ARM BRACKET

Catalog Number	Description
KT-CAB-6A-UNV	Galvanized cross arm bracket Compatible with SLFLED fixtures 6 fixture maximum Universal mounting For use on wood, steel, and concrete poles MOUNTING HARDWARE NOT INCLUDED

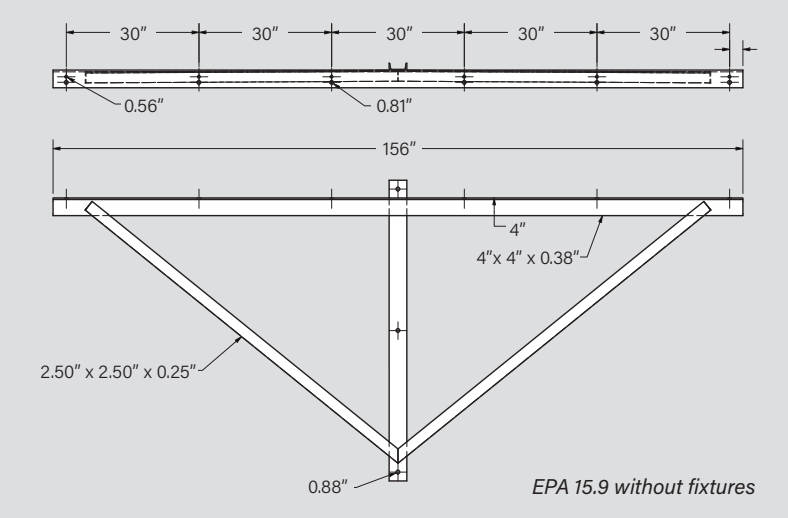

Wind Zone	Max Weight per Fixture	Max EPA per Fixture
100 MPH	40 lbs.	2.2 ft²
120 MPH	40 lbs.	1.5 ft²

KT-CAB-XA-UNV

CROSS ARM BRACKET

PRODUCT IMAGES



KT-CAB-2A-UNV

KT-SLFLED500XX-S1-XX-YM-750-VDIM



KT-SLFLED750XX-M1-XX-YM-750-VDIM



KT-CAB-4A-UNV

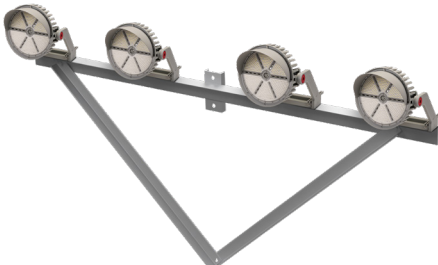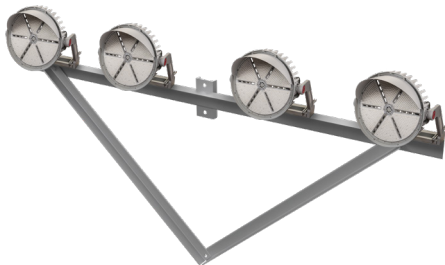

KT-CAB-6A-UNV

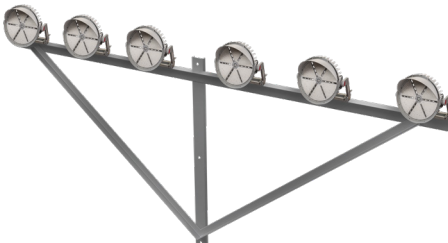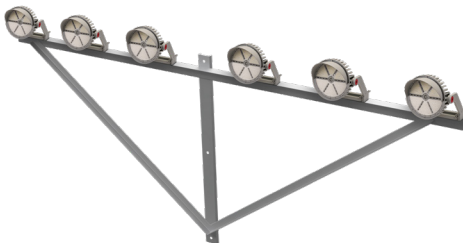

ORDERING INFORMATION

Catalog Number	UPC	Easy Code
KT-CAB-2A-UNV	843654169613	LWZ-92
KT-CAB-4A-UNV	843654169620	SIL-50
KT-CAB-6A-UNV	843654169637	LQV-93

CATALOG NUMBER BREAKDOWN

KT-CAB-XA-UNV

- 1
- 2
- 3
- 4
- 5

- 1 Keystone Technologies
- 2 Cross Arm Bracket
- 3 Maximum Fixtures
- 4 Series A
- 5 Universal Mounting