

KT-LED7R20-8CSF /G4

GENERAL PURPOSE LED LAMP

DESCRIPTION

R20 Flood | E26 Medium Base | Color Select |
Dimmable | 25,000hr Lifetime

APPLICATIONS

- Recessed lighting
- Track lighting
- Surface-mount ceiling fixtures



RoHS
Compliant



**3 YEAR
WARRANTY**

PRODUCT FEATURES

- 80%+ energy savings and less heat generation vs legacy equivalents
- 25,000 hr lifetime means fewer replacements and lower maintenance cost
- Smooth diffused lens for comfortable, glare free performance
- Durable plastic housing for lower risk of breakage
- ANSI compliant construction ensures fit for intended applications
- UL Certified
- Not suitable for use in totally enclosed fixtures
- Suitable for dry and damp locations
- Suitable for use with dimmers
(see compatibility list for comprehensive list of approved dimmers)
- PF > 0.70
- Operating temperature range: 4°F/-20°C to 104°F/40°C
- Complies with FCC Part 15


PERFORMANCE SPECIFICATIONS

Catalog Number	Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimming	CRI	Base Type	Beam Angle	Legacy Equivalent Wattage
KT-LED7R20-8CSF /G4	7W	2700K	550	79 lm/W	120V	Yes	>80	E26	110°	50W
		3000K								
		3500K								
		4000K								
		5000K								

KT-LED7R20-8CSF /G4

GENERAL PURPOSE LED LAMP

PHYSICAL SPECIFICATIONS

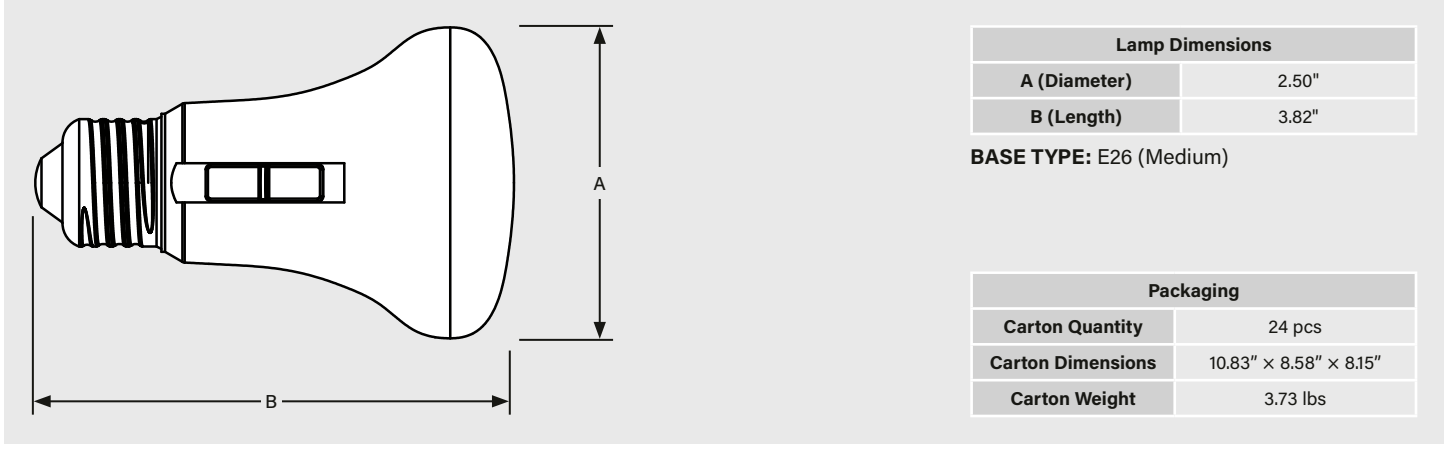

ORDERING INFORMATION

Catalog Number	UPC	Easy Code
KT-LED7R20-8CSF /G4	843654175942	EGW-00

CATALOG NUMBER BREAKDOWN

KT-LED7R20-8CSF /G4

1 2 3 4 5 6 7 8

1 Keystone Technologies
2 LED Lamp
3 Wattage
4 Lamp Shape

5 80 CRI
6 Color Select
7 Color Select Designation
8 Generation 4

8 Color Select Designation

F 2700/3000/3500/4000/5000K