

KT-LEDXXPARXXX-XF-XCSF /G4

GENERAL PURPOSE LED LAMP

DESCRIPTION

PAR Flood | E26 Medium Base | Color Select |
Dimmable | 15,000hr Lifetime

APPLICATIONS

- Track lighting
- Display
- Flood lighting
- Spot lighting
- Outdoor fixtures (with suitable protection from the elements)



RoHS
Compliant



**2 YEAR
WARRANTY**

PRODUCT FEATURES

- 80%+ energy savings and less heat generation vs legacy equivalents
- 15,000 hr lifetime means fewer replacements and lower maintenance cost
- Smooth diffused lens for comfortable, glare free performance
- Durable plastic housing for lower risk of breakage
- ANSI compliant construction ensures fit for intended applications
- UL Certified
- Suitable for use with dimmers
(see compatibility list for a comprehensive list of approved dimmers)
- Not for use in totally enclosed luminaires
- Suitable for dry, damp, and wet locations
- Operating temperature range: 4°F/-20°C to 104°F/40°C
- Complies with FCC Part 15

PERFORMANCE SPECIFICATIONS OVERVIEW

Keystone Catalog Number	Rated Lamp Wattage	Preset CCT	Lumens	Efficacy	Input Voltage	Power Factor	CRI	Base Type	Beam Angle	Legacy Equivalent Wattage
PAR20 Lamps										
KT-LED6.5PAR20-F-8CSF /G4	6.5W	2700K	500	77 lm/W	120V	0.7	>80	E26	40°	50W
KT-LED5.5PAR20-F-9CSF /G4	5.5W	2700K	500	91 lm/W	120V	0.9	>90	E26	40°	50W
PAR30 Lamps										
KT-LED11PAR30-F-8CSF /G4	11W	2700K	850	77 lm/W	120V	0.7	>80	E26	40°	75W
KT-LED10PAR30-F-9CSF /G4	10W	2700K	850	85 lm/W	120V	0.9	>90	E26	40°	75W
KT-LED10PAR30-NF-9CSF /G4	10W	2700K	850	85 lm/W	120V	0.9	>90	E26	25°	75W
PAR30S Lamps										
KT-LED11PAR30S-F-8CSF /G4	11W	2700K	850	77 lm/W	120V	0.7	>80	E26	40°	75W
KT-LED10PAR30S-F-9CSF /G4	10W	2700K	850	85 lm/W	120V	0.9	>90	E26	40°	75W
KT-LED10PAR30S-NF-9CSF /G4	10W	2700K	850	85 lm/W	120V	0.9	>90	E26	25°	75W
PAR38 Lamps										
KT-LED15PAR38-F-8CSF /G4	15W	2700K	1250	83 lm/W	120V	0.7	>80	E26	40°	120W
KT-LED15PAR38-F-9CSF /G4	15W	2700K	1250	83 lm/W	120V	0.9	>90	E26	40°	120W
KT-LED15PAR38-NF-9CSF /G4	15W	2700K	1250	83 lm/W	120V	0.9	>90	E26	25°	120W



ESSENTIAL SERIES

GENERAL PURPOSE LED BULBS



KT-LEDXXPARXXX-XF-XCSF /G4

GENERAL PURPOSE LED LAMP

PERFORMANCE SPECIFICATIONS


Keystone Catalog Number	Rated Lamp Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Power Factor	CRI	Base Type	Beam Angle	Legacy Equivalent Wattage
PAR20 Lamps										
KT-LED5.5PAR20-F-9CSF /G4	5.5W	2700K 3000K 3500K 4000K 5000K	500	91 lm/W	120V	0.9	>90	E26	40°	50W
KT-LED6.5PAR20-F-8CSF /G4	6.5W	2700K 3000K 3500K 4000K 5000K	500	77 lm/W	120V	0.7	>80	E26	40°	50W
PAR30 Lamps										
KT-LED10PAR30-NF-9CSF /G4	10W	2700K 3000K 3500K 4000K 5000K	850	85 lm/W	120V	0.9	>90	E26	25°	75W
KT-LED10PAR30-F-9CSF /G4	10W	2700K 3000K 3500K 4000K 5000K	850	85 lm/W	120V	0.9	>90	E26	40°	75W
KT-LED11PAR30-F-8CSF /G4	11W	2700K 3000K 3500K 4000K 5000K	850	77 lm/W	120V	0.7	>80	E26	40°	75W
PAR30S Lamps										
KT-LED10PAR30S-NF-9CSF /G4	10W	2700K 3000K 3500K 4000K 5000K	850	85 lm/W	120V	0.9	>90	E26	25°	75W
KT-LED10PAR30S-F-9CSF /G4	10W	2700K 3000K 3500K 4000K 5000K	850	85 lm/W	120V	0.9	>90	E26	40°	75W
KT-LED11PAR30S-F-8CSF /G4	11W	2700K 3000K 3500K 4000K 5000K	850	77 lm/W	120V	0.7	>80	E26	40°	75W
PAR38 Lamps										
KT-LED15PAR38-NF-9CSF /G4	15W	2700K 3000K 3500K 4000K 5000K	1250	83 lm/W	120V	0.9	>90	E26	25°	120W
KT-LED15PAR38-F-9CSF /G4	15W	2700K 3000K 3500K 4000K 5000K	1250	83 lm/W	120V	0.9	>90	E26	40°	120W
KT-LED15PAR38-F-8CSF /G4	15W	2700K 3000K 3500K 4000K 5000K	1250	83 lm/W	120V	0.7	>80	E26	40°	120W

KT-LEDXXPARXXX-XF-XCSF /G4


GENERAL PURPOSE LED LAMP

PHYSICAL SPECIFICATIONS


KT-LED5.5PAR20-F-9CSF /G4
KT-LED6.5PAR20-F-8CSF /G4

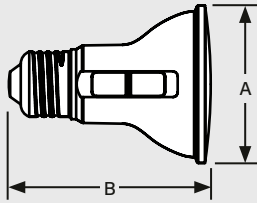


KT-LED11PAR30-F-8CSF /G4




KT-LED10PAR30-F-9CSF /G4
KT-LED10PAR30-NF-9CSF /G4

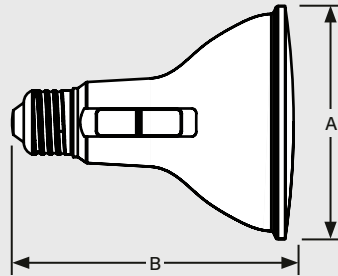


KT-LED11PAR30S-F-8CSF /G4




KT-LED10PAR30S-F-9CSF /G4
KT-LED10PAR30S-NF-9CSF /G4

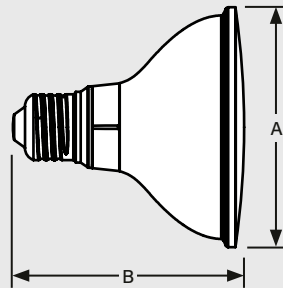

KT-LED15PAR38-F-8CSF /G4

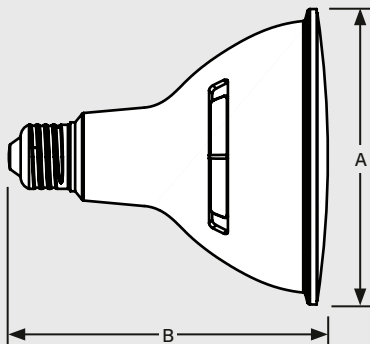

KT-LED15PAR38-F-9CSF /G4
KT-LED15PAR38-NF-9CSF /G4

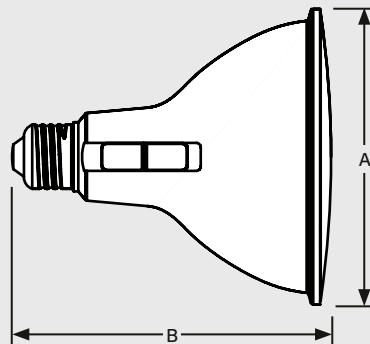

Lamp Dimensions

Lamp Shape	PAR20	PAR30	PAR30S	PAR38
A (Diameter)	2.48"	3.74"	3.74"	4.72"
B (Length)	3.19"	4.53"	3.62"	5.12"

BASE TYPE: E26 (Medium)

Packaging Dimensions

Lamp Shape	PAR20	PAR30	PAR30S	PAR38
Carton Quantity	24 pcs	24 pcs	24 pcs	12 pcs
Carton Dimensions	10.63"	15.75"	15.75"	14.96"
	X	X	X	X
	8.07"	11.81"	11.81"	10.04"
	X	X	X	X
	7.28"	10.04"	8.19"	11.34"

Packaging Weight

Catalog Number	Carton Weight
KT-LED6.5PAR20-F-8CSF /G4	3.75 lbs
KT-LED5.5PAR20-F-9CSF /G4	4.19 lbs
KT-LED11PAR30-F-8CSF /G4	6.99 lbs
KT-LED10PAR30-F-9CSF /G4	7.50 lbs
KT-LED10PAR30-NF-9CSF /G4	7.61 lbs
KT-LED11PAR30S-F-8CSF /G4	6.17 lbs
KT-LED10PAR30S-F-9CSF /G4	6.72 lbs



ESSENTIAL SERIES

GENERAL PURPOSE LED BULBS



KT-LEDXXPARXXX-XF-XCSF /G4

GENERAL PURPOSE LED LAMP

ORDERING INFORMATION

Catalog Number	UPC	Easy Code
KT-LED6.5PAR20-F-8CSF /G4	843654176000	HOQ-86
KT-LED5.5PAR20-F-9CSF /G4	843654176017	PKH-83
KT-LED11PAR30-F-8CSF /G4	843654176024	XNR-71
KT-LED10PAR30-F-9CSF /G4	843654176048	VZH-49
KT-LED10PAR30-NF-9CSF /G4	843654176055	TOL-73
KT-LED11PAR30S-F-8CSF /G4	843654176031	TYA-51
KT-LED10PAR30S-F-9CSF /G4	843654176062	KPT-20
KT-LED10PAR30S-NF-9CSF /G4	843654176079	RES-43
KT-LED15PAR38-F-8CSF /G4	843654176086	QFR-31
KT-LED15PAR38-F-9CSF /G4	843654176093	QAP-21
KT-LED15PAR38-NF-9CSF /G4	843654176109	TIF-32

CATALOG NUMBER BREAKDOWN

KT-LEDXXPARXXX-XF-XCSF /G4

1 2 3 4 5 6 7 8 9

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Shape
- 5 Distribution
- 6 CRI
- 7 Color Select
- 8 Color Select Designation
- 9 Generation 4

3 Wattage

5.5	5.5W
6.5	6.5W
10	10W
11	11W
15	15W

4 Lamp Shape

PAR20	PAR 20 Flood
PAR30	PAR 30 Flood
PAR30S	PAR 30S Short Neck Flood
PAR38	PAR 38 Flood

5 Distribution

F	Flood
NF	Narrow Flood

6 CRI

8	>80
9	>90

8 Color Select Designation

F	2700/3000/3500/4000/5000K
---	---------------------------