

KT-LED7MR16-S-9XX /G4

GENERAL PURPOSE LED LAMP

DESCRIPTION

MR16 Spotlight | GU5.3 Base | Dimmable | 25,000hr Lifetime

APPLICATIONS

- Track lighting
- Display
- Under-cabinet
- Outdoor landscaping (with suitable protection from the elements)



3 YEAR
 WARRANTY

PRODUCT FEATURES

- 80%+ energy savings and less heat generation vs legacy equivalents
- 25,000 hr lifetime means fewer replacements and lower maintenance costs
- Smooth diffused lens for comfortable, glare free performance
- Durable plastic housing for lower risk of breakage
- ANSI compliant construction ensures fit for intended applications
- UL Certified
- Not suitable for use in totally enclosed fixtures
- Suitable for dry and damp locations
- Suitable for use with dimmers
(see compatibility list for comprehensive list of approved dimmers)
- PF > 0.9
- Operating temperature range: 4°F/-20°C to 104°F/40°C
- Complies with FCC Part 15
- T20/T24 compliant (excluding 5000K)

PERFORMANCE SPECIFICATIONS


Catalog Number	Rated Lamp Wattage	CCT	Lumens	Efficacy	Input Voltage	Dimming	CRI	Base Type	Beam Angle	Legacy Equivalent Wattage
KT-LED7MR16-S-927 /G4	7W	2700K	530	76 lm/W	12V	Yes	>90	GU5.3	40°	50W
KT-LED7MR16-S-930 /G4		3000K								
KT-LED7MR16-S-940 /G4		4000K								
KT-LED7MR16-S-950 /G4		5000K								

KT-LED7MR16-S-9XX /G4

GENERAL PURPOSE LED LAMP

PHYSICAL SPECIFICATIONS

KT-LED7MR16-S-9XX /G4

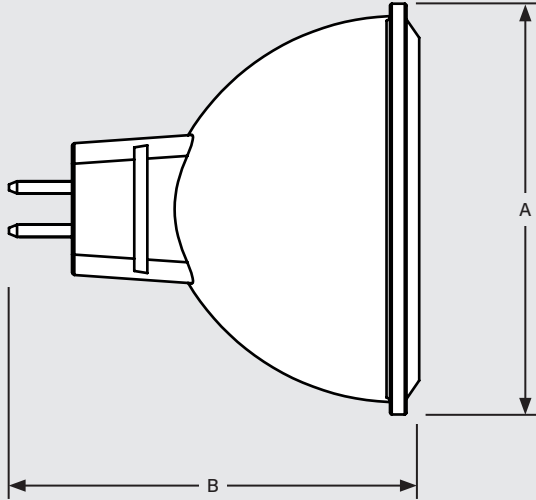

Lamp Dimensions

A (Diameter)	1.97"
B (Length)	1.96"

BASE TYPE: GU5.3

Packaging

Carton Quantity	100 pcs
Carton Dimensions	20.67" × 10.51" × 5.31"
Carton Weight	11.46 lbs

ORDERING INFORMATION

Catalog Number	UPC	Easy Code
KT-LED7MR16-S-927 /G4	843654176192	HSF-02
KT-LED7MR16-S-930 /G4	843654176208	KSM-37
KT-LED7MR16-S-940 /G4	843654176215	ZBO-40
KT-LED7MR16-S-950 /G4	843654176222	ZIF-38

CATALOG NUMBER BREAKDOWN

KT-LED7MR16-S-9XX /G4

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

1 Keystone Technologies

2 LED Lamp

3 Wattage

4 Lamp Shape

5 Spotlight

6 90 CRI

7 CCT

8 Generation 4

7 CCT

27	2700K
30	3000K
40	4000K
50	5000K