

KT-LED7MR16-S-8XX-GU10 /G4

GENERAL PURPOSE LED LAMP

DESCRIPTION

MR16 Spotlight | GU10 Base | Dimmable | 25,000hr Lifetime

APPLICATIONS

- Track lighting
- Display
- Under-cabinet
- Outdoor landscaping (with suitable protection from the elements)



RoHS
Compliant



3 YEAR
WARRANTY

PRODUCT FEATURES

- 80%+ energy savings and less heat generation vs legacy equivalents
- 25,000 hr lifetime means fewer replacements and lower maintenance costs
- Smooth diffused lens for comfortable, glare free performance
- Durable plastic housing for lower risk of breakage
- ANSI compliant construction ensures fit for intended applications
- UL Certified
- Not suitable for use in totally enclosed fixtures
- Suitable for dry and damp locations
- Suitable for use with dimmers
(see compatibility list for comprehensive list of approved dimmers)
- PF > 0.7
- Operating temperature range: 4°F/-20°C to 104°F/40°C
- Complies with FCC Part 15

PERFORMANCE SPECIFICATIONS


Catalog Number	Rated Lamp Wattage	CCT	Lumens	Efficacy	Input Voltage	Dimming	CRI	Base Type	Beam Angle	Legacy Equivalent Wattage
KT-LED7MR16-S-827-GU10 /G4	7W	2700K	500	71 lm/W	120V	Yes	>80	GU10	40°	50W
KT-LED7MR16-S-830-GU10 /G4		3000K								
KT-LED7MR16-S-840-GU10 /G4		4000K								
KT-LED7MR16-S-850-GU10 /G4		5000K								

KT-LED7MR16-S-8XX-GU10 /G4

GENERAL PURPOSE LED LAMP

PHYSICAL SPECIFICATIONS

KT-LED7MR16-S-8XX-GU10 /G4

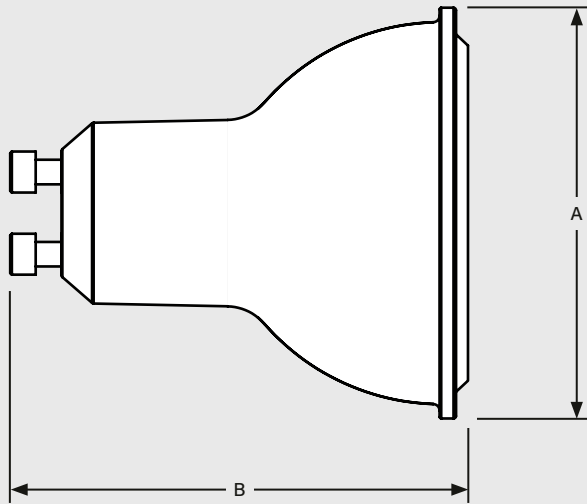

Lamp Dimensions

A (Diameter)	1.97"
B (Length)	2.19"

BASE TYPE: GU10

Packaging

Carton Quantity	100 pcs
Carton Dimensions	20.67" × 10.51" × 5.35"
Carton Weight	9.57 lbs

ORDERING INFORMATION

Catalog Number	UPC	Easy Code
KT-LED7MR16-S-827-GU10 /G4	843654176116	QOA-07
KT-LED7MR16-S-830-GU10 /G4	843654176123	BBO-23
KT-LED7MR16-S-840-GU10 /G4	843654176130	SUS-45
KT-LED7MR16-S-850-GU10 /G4	843654176147	OCN-26

CATALOG NUMBER BREAKDOWN

KT-LED7MR16-S-8XX-GU10 /G4

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

1 Keystone Technologies

2 LED Lamp

3 Wattage

4 Lamp Shape

5 Spotlight

6 80 CRI

7 CCT

8 Base Type

9 Generation 4

7 CCT

27	2700K
30	3000K
40	4000K
50	5000K