



KT-LED33PSPAR38-F-8XX

REPLACEMENT FLOOD LAMP

DESCRIPTION

Commercial PAR38 Flood Lamp | Power-Select | 3000–5000K | >80 CRI



RoHS
Compliant



5 YEAR
WARRANTY

LAMP TYPE: Commercial PAR38

BASE TYPE: E26 (Medium)

SELECTABLE WATTAGE: 33/25/18W

COLOR TEMPERATURE: 3000K, 4000K, or 5000K

METAL HALIDE EQUIVALENT: 250/150/100W

COLOR RENDERING INDEX (CRI): >80

WARRANTY: 5 Years



PRODUCT FEATURES

- Keystone Power Select technology (33/25/18W)
- Up to 75% energy saving compared to legacy equivalent lamps
- Can be used in base-up or base-down position
- Rated for open and recessed fixtures
- Large metal heatsink for optimal heat dissipation
- Ideal for recessed corridor and high-power flood lighting
- THD: <20%
- PF: >0.90
- Operating temperature range: -4°F/-20°C to 113°F/45°C
- Suitable for dry and damp location
- UL 1993 and 1598C Rated
- Rated lifetime: L70 @ 25,000 hrs

PERFORMANCE SPECIFICATIONS

Catalog Number	Selectable Wattage	CCT	Lumens	Efficacy	Legacy Equivalency	Input Voltage	CRI	Distribution	Rated Life
KT-LED33PSPAR38-F-830	33W	3000K	3790	115 lm/W	250W Metal Halide	120–277V	>80	40°	25,000 hrs
	25W		3100	124 lm/W	150W Metal Halide				
	18W		2370	132 lm/W	100W Metal Halide				
KT-LED33PSPAR38-F-840	33W	4000K	4050	123 lm/W	250W Metal Halide				
	25W		3300	132 lm/W	150W Metal Halide				
	18W		2520	140 lm/W	100W Metal Halide				
KT-LED33PSPAR38-F-850	33W	5000K	4120	125 lm/W	250W Metal Halide				
	25W		3350	134 lm/W	150W Metal Halide				
	18W		2550	142 lm/W	100W Metal Halide				




KT-LED33PSPAR38-F-8XX


REPLACEMENT FLOOD LAMP

PHOTOMETRIC SPECIFICATIONS

POLAR CANDELA DISTRIBUTION

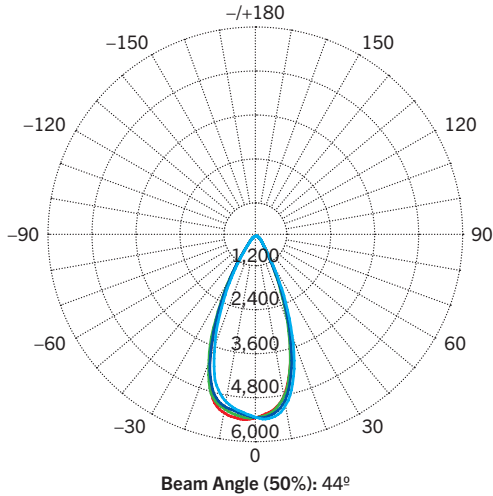

PHYSICAL CHARACTERISTICS

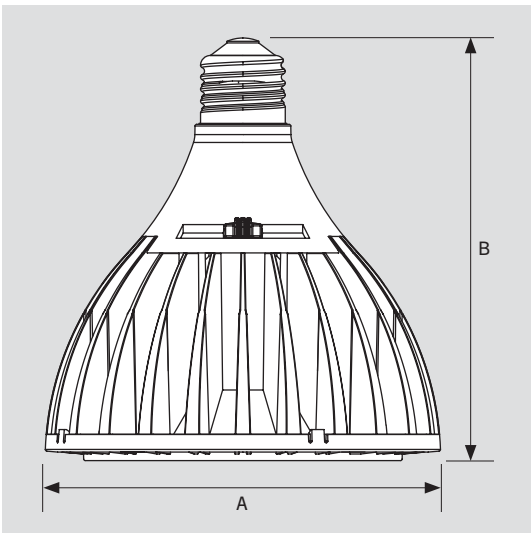

LAMP DIMENSIONS

A (Length)	5.04"
B (Diameter)	4.72"

BASE TYPE: E26 (Medium)





KT-LED33PSPAR38-F-8XX

REPLACEMENT FLOOD LAMP

POWER SELECT (WATTAGE) ADJUSTMENT

This fixture is equipped with Power Select technology.

1. Ensure power is off to the fixture.
2. Adjust dip switch to desired setting.

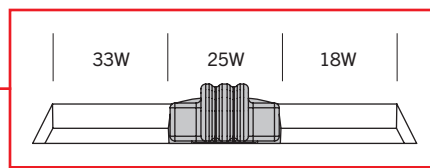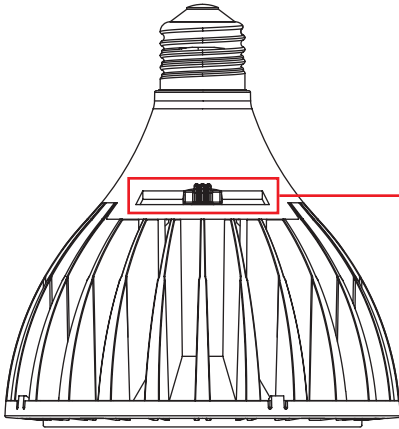

POWER SELECT ADJUSTMENT

Set dip switch to adjust wattage between 33W, 25W, and 18W. Fixture comes preset at 33W.

ORDERING INFORMATION

ORDER CODE	PACK QTY.	UPC	Easy Code
KT-LED33PSPAR38-F-830	1	843654135441	LUD-13
KT-LED33PSPAR38-F-840	1	843654135458	IOH-07
KT-LED33PSPAR38-F-850	1	843654135465	QSI-81

CATALOG NUMBER BREAKDOWN

KT-LED33PSPAR38-F-8XX

1 2 3 4 5 6 7 8 9

- 1 Keystone Technologies
- 2 LED Technology
- 3 Max Wattage
- 4 Power Select
- 5 Parabolic Aluminized Reflector Lamp
- 6 4.75" Diameter
- 7 Standard Flood
- 8 80 CRI
- 9 Color Temperature