

KT-LED10DL-4CA-9CSF-DIM

4" SURFACE MOUNT DISK LIGHT

REV1

DESCRIPTION

4" Circular LED Residential Retrofit Disk Light

APPLICATION

Ideal for residential, hospitality, retail, and other retrofit and new construction applications




PRODUCT FEATURES

- Ideal for retrofit, new construction, and remodel applications
- Flush-mount offers clean, modern appearance
- Diffused lens reduces glare
- Powered by Keystone TRIAC dimming LED driver; 10–100% dimming
- Ambient operating temperature: –30°C/–22°F to 40°C/104°F
- Suitable for use in wet locations (covered ceiling mount only)
- Power factor: > 0.90
- FCC Part 15, Subpart B, Class B
- UL Listed


**** TAA options available. See Ordering Information below**

PERFORMANCE SPECIFICATIONS

Catalog Number	Input Voltage	Wattage	CCT	Lumen Output	Efficacy	CRI	Beam Angle	Lifetime
KT-LED10DL-4CA-9CSF-DIM	120V	10W	2700K	850	85 lm/W	>90	110°	50,000 hrs
			3000K					
			3500K					
			4000K					
			5000K					

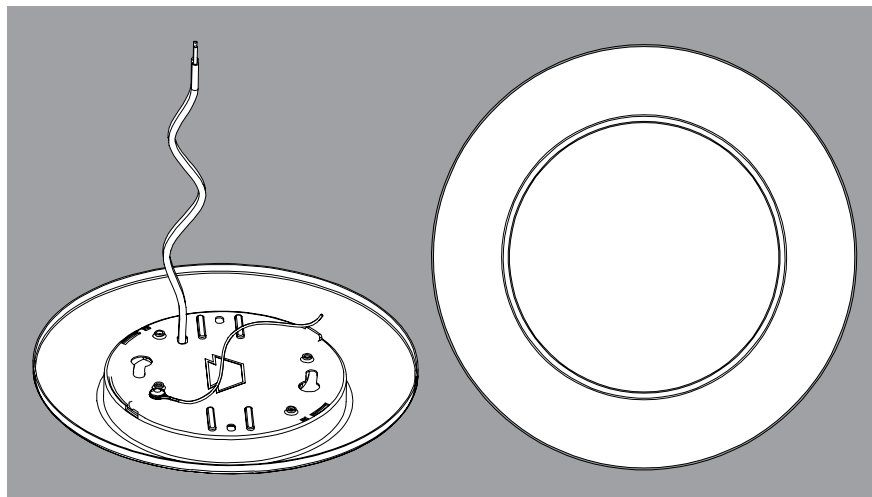

GENERAL WIRING DIAGRAM

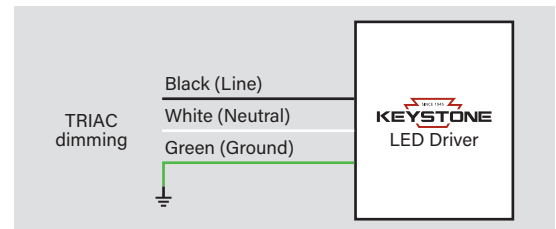


KT-LED10DL-4CA-9CSF-DIM

4" SURFACE MOUNT DISK LIGHT


REV1

PHOTOMETRICS SPECIFICATIONS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

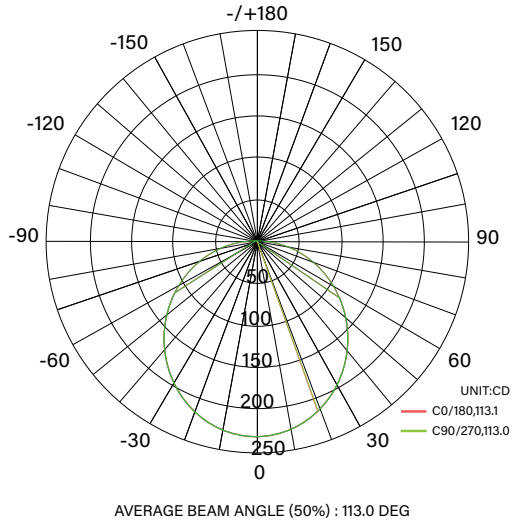


IsoLux Plots

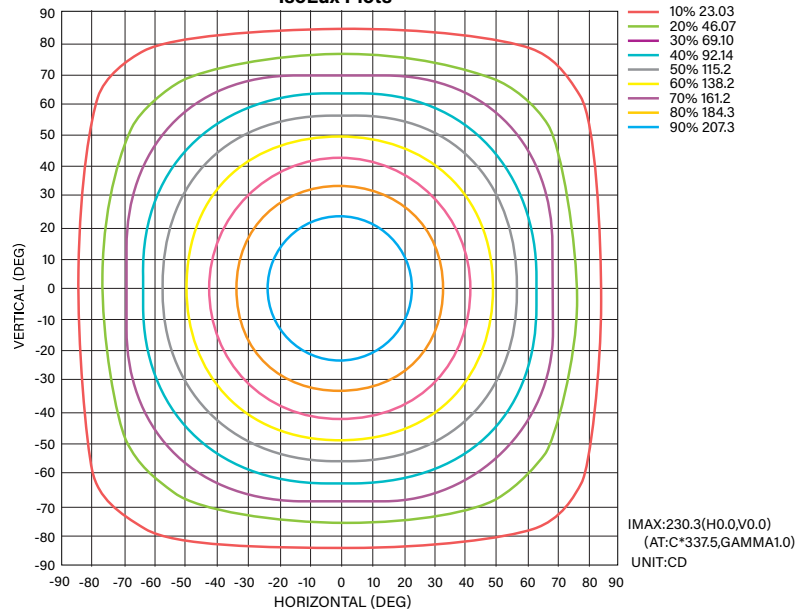


AVERAGE ILLUMINANCE EFFECTIVE FIGURE

FLUX OUT:486.4 LM

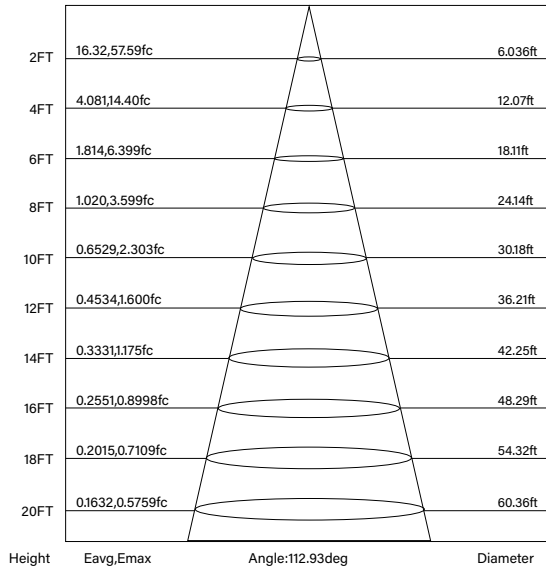

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

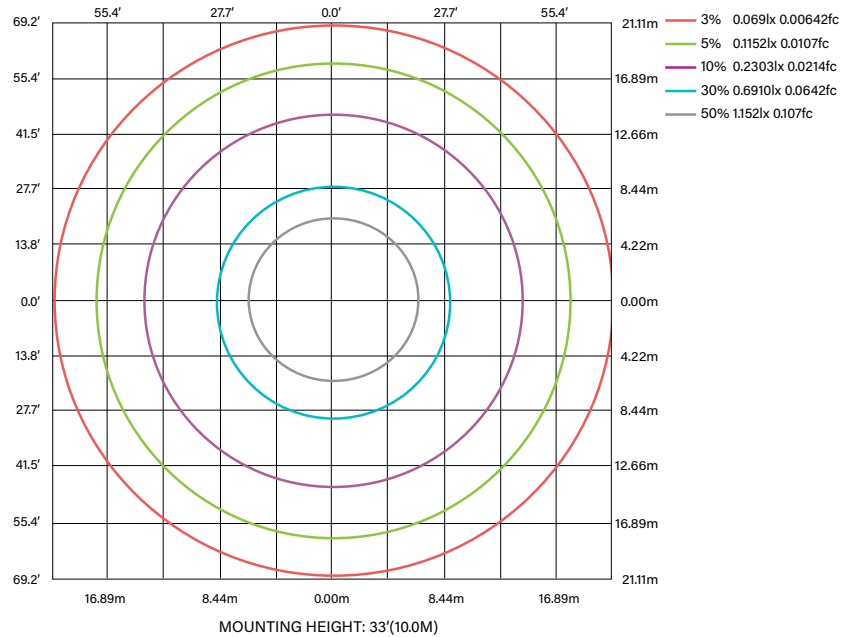


KT-LED10DL-4CA-9CSF-DIM

4" SURFACE MOUNT DISK LIGHT

REV1

PHYSICAL SPECIFICATIONS

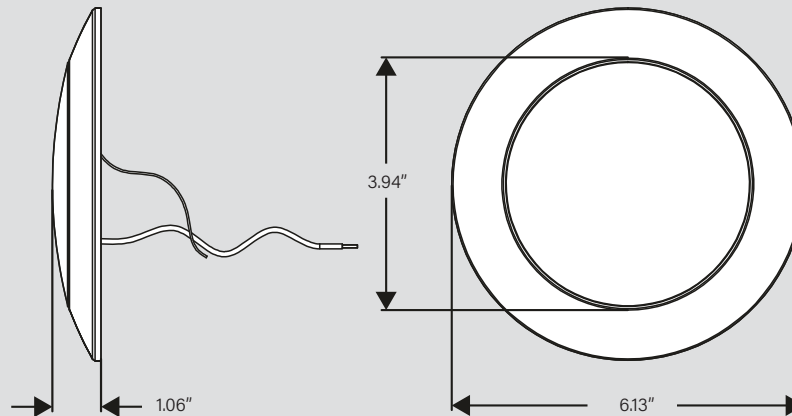


INSTALLATION INSTRUCTIONS

1. Shut off power.

2. Connect the luminaire to supply wires with the wire nuts (included).




3. Remove lens by turning counter clockwise to unlock.



4. Select desired CCT

5. Safely place all wires into the junction box, mount luminaire to the junction box and screws through the keyhole slots. 4" luminaires are compatible with 2.75" junction boxes.

6. Replace lens and twist clockwise to lock.

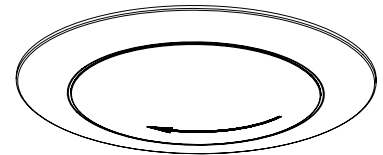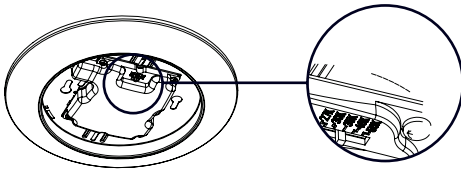

7. Restore power.



OVA



KT-LED10DL-4CA-9CSF-DIM

4" SURFACE MOUNT DISK LIGHT

REV1

ORDERING INFORMATION

Catalog Number	Pack Qty.	UPC	Easy Code
KT-LED10DL-4CA-9CSF-DIM	12	843654156910	XFR-31
KT-LED10DL-4CA-9CSF-DIM /TAA	12	TBD	TBD

CATALOG NUMBER BREAKDOWN

KT-LED10DL-4CA-9CSF-DIM

1 2 3 4 5 6 7 8 9 10 11 12

1 Keystone Technologies	4 Fixture Type	5 Nominal Size	6 Shape
2 LED Technology	DL Disk Light	4 4" Nominal	C Circular
3 Wattage	7 Designation	10 Color Select Designation	
4 Fixture Type	A Series A Design	F 2700/3000/3500/4000/5000K	
5 Nominal Size	11 Dimming	12 TAA Compliant	
6 Shape	DIM TRIAC Dimmable	/TAA Made in Cambodia	
7 Designation			
8 90 CRI			
9 Color Select			
10 Color select designation			
11 Dimming			
12 TAA Compliant			