



KT-UCLEDXX-XXA-9CSF-FDIM

INSTALLATION INSTRUCTIONS

PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION. Please read the instructions before you install and use the Undercabinet light.

SAFETY AND ELECTRICAL PARAMETERS

Warning

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and or the fixture box and fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

Warning

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.

Caution

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy/recycle packaging material, as these may be hazardous to children.
- Risk of Burn. Disconnect power and allow fixture to cool before handling/servicing.

Notice

- Green ground screw provided in proper location. Do not relocate.
- Minimum 90° supply conductors.
- Specifications and dimensions are subject to change without notice.
- Suitable for Dry or Damp location.


COMPONENTS INCLUDED IN KIT

Part	Quantity
LED Undercabinet Fixture	1
Mounting hardware	1
Instruction sheet	1

Caution: Before installing, make certain that AC power to the fixture is off.


GENERAL SETUP INSTRUCTIONS

WIRING SPECIFICATIONS

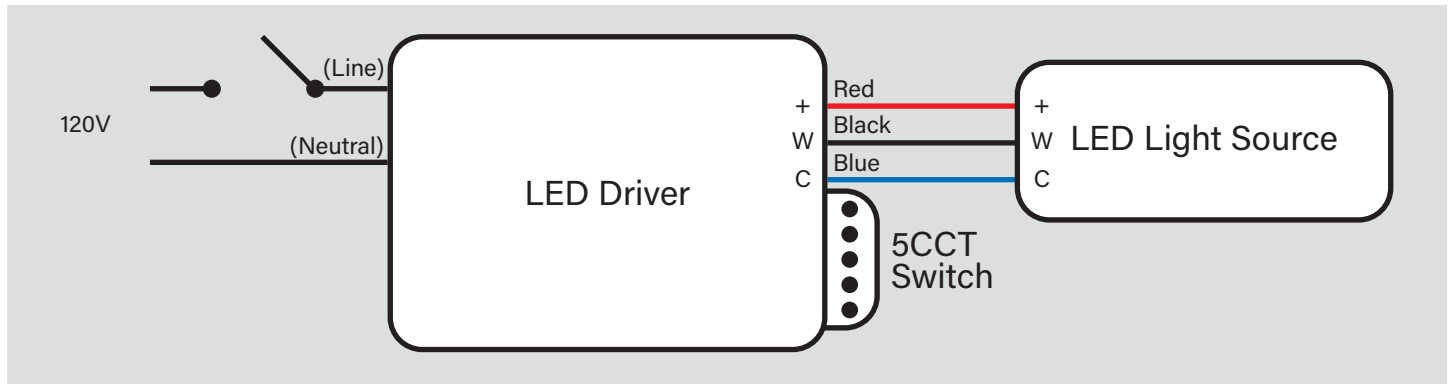


INSTALLATION INSTRUCTIONS

1. Carefully remove diffuser by squeezing front edge with forefingers while holding back side with thumbs

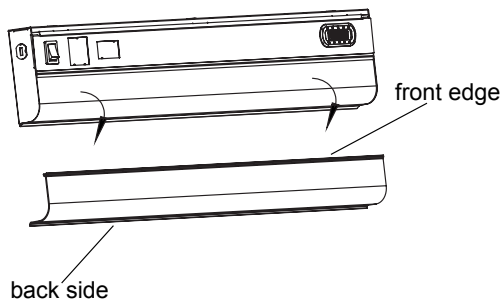


2. Open wireway cover by gently pressing inward to release cover from the 2 tabs on housing.

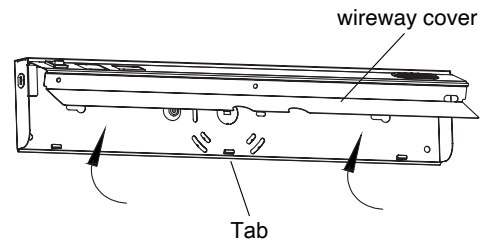


INSTALLATION OF FIXTURE DIRECT-WIRE METHOD


1. Remove the knock-out which is nearest the location of incoming power wires.

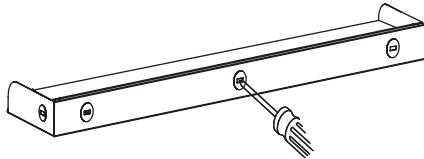


2. Mount and secure the romex strain relief to the fixture housing. Leaving strain relief screws loose.

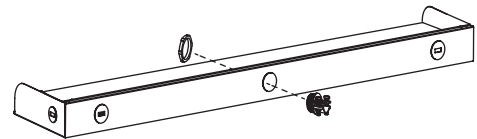


3. Secure fixture on the desired location using adequate screws.

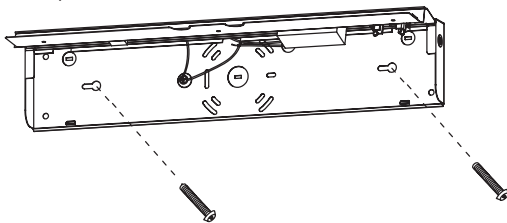

5. Reattach wireway cover and diffuser and select desired light color.

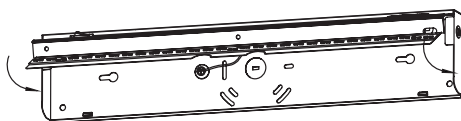

4. Make wiring connection according to wiring diagram.

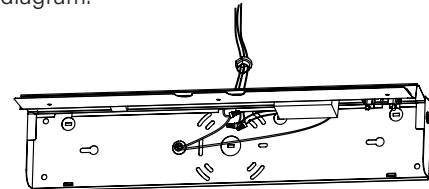


(Installation Instructions continued on next page)


INSTALLATION INSTRUCTIONS (CONTINUED)

WALL MOUNTING - OVER OCTAGONAL J-BOX


1. Remove the center knock-out from the back of the luminaire.

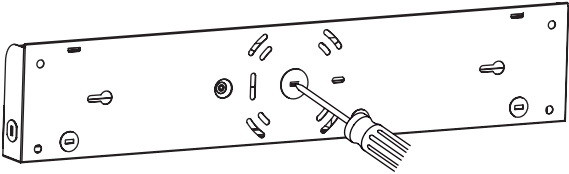

2. Make wiring connection according to the wiring diagram.

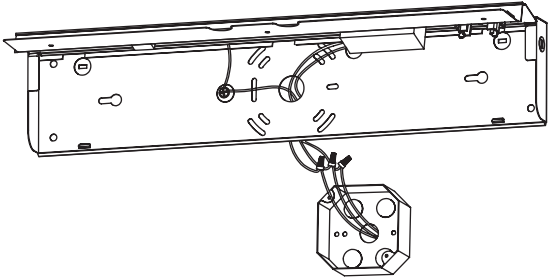

3. Secure fixture on the desired location using adequate screws.

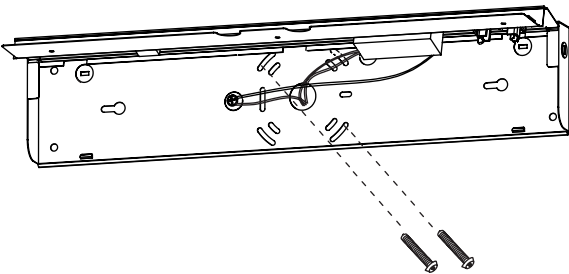

4. Reattach wireway cover and diffuser and select desired light color.



ORDERING INFORMATION

CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
KT-UCLED5-9A-9CSF-FDIM	9" Under Cabinet Fixture 5W Color Select 2700/3000/3500/4000/5000K 120V Input Phase Dimming	843654175133	TTQ-22
KT-UCLED5-12A-9CSF-FDIM	12" Under Cabinet Fixture 5W Color Select 2700/3000/3500/4000/5000K 120V Input Phase Dimming	843654175140	GGC-56
KT-UCLED9-18A-9CSF-FDIM	18" Under Cabinet Fixture 9W Color Select 2700/3000/3500/4000/5000K 120V Input Phase Dimming	843654175157	NAG-40
KT-UCLED9-24A-9CSF-FDIM	24" Under Cabinet Fixture 9W Color Select 2700/3000/3500/4000/5000K 120V Input Phase Dimming	843654175164	JDP-01
KT-UCLED14-34A-9CSF-FDIM	34" Under Cabinet Fixture 14W Color Select 2700/3000/3500/4000/5000K 120V Input Phase Dimming	843654175171	LVT-27
KT-UCLED20-42A-9CSF-FDIM	42" Under Cabinet Fixture 20W Color Select 2700/3000/3500/4000/5000K 120V Input Phase Dimming	843654175188	JYI-26
KT-UCLED20-46A-9CSF-FDIM	46" Under Cabinet Fixture 20W Color Select 2700/3000/3500/4000/5000K 120V Input Phase Dimming	843654175195	UMK-33