

W-LED-4-44PS-8CSA



4FT LED WRAP FIXTURE, 120-277V INPUT,
FROSTED LENS, 0-10V DIMMING

PRODUCT FEATURES

- CCT Selectable (3500/4000/5000K)
 - Wattage Selectable (44/28/18W)
 - Powered by 0 –10V dimming LED driver with 12V Aux
 - Luminaire is suitable for installation within a clothes closet storage space
 - Compatible with emergency backups
- LED lifetime: L70 >100,000 hours @ 25°C fixture ambient
 - Low optical flicker
 - THD: < 20%
 - Power factor > 0.95




10 YEAR
LIMITED WARRANTY

PERFORMANCE SPECIFICATIONS

Catalog Number	Input Voltage	Wattage	Color Temperature	Lumen Output	Efficacy	CRI	Power Factor	Lifetime
W-LED-4-44PS-8CSA	120–277V	44W	3500K	5,852	133 lm/W	> 80	> 0.90	50,000hrs
			4000K	5,896	134 lm/W			
			5000K	5,940	135 lm/W			
		28W	3500K	3,948	141 lm/W			
			4000K	3,976	142 lm/W			
			5000K	4,004	143 lm/W			
		18W	3500K	2,664	148 lm/W			
			4000K	2,682	149 lm/W			
			5000K	2,700	150 lm/W			

PHOTOMETRIC SPECIFICATIONS

POLAR CANDELA DISTRIBUTION

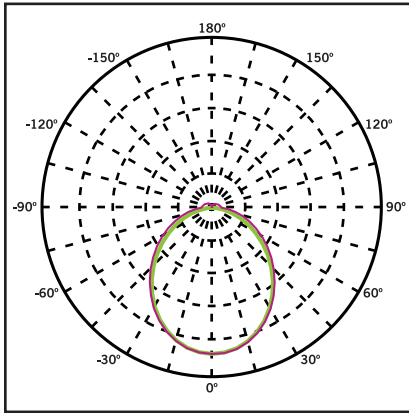


Maximum Candela = 2155.8
Located at Horizontal Angle = 0,
Vertical Angle 0

1. **Violet** Vertical Plane through Horizontal Angles (90-270)
2. **Green** Vertical Plane through Horizontal Angles (0-180)


Beam Angle: 220°

Visible Light Area: 325°

RELATIVE SPECTRAL POWER DISTRIBUTION

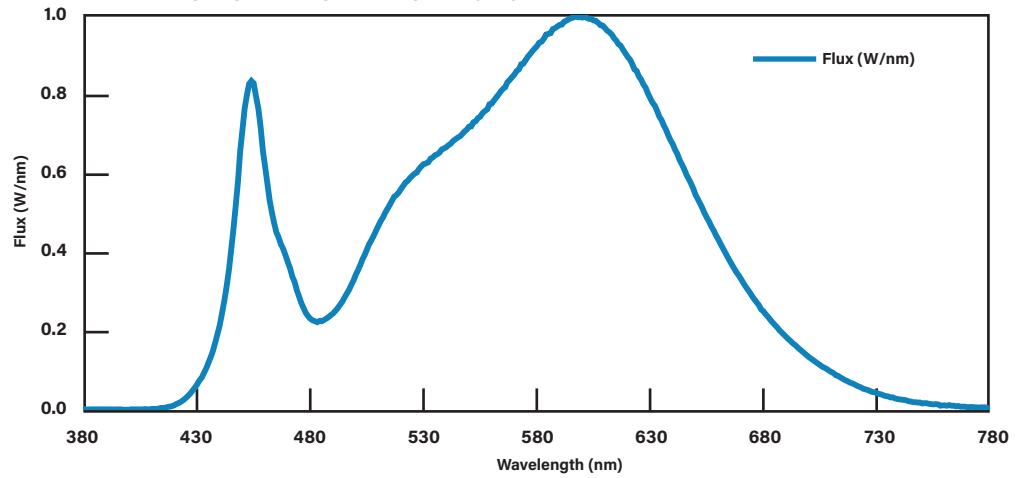

PHYSICAL SPECIFICATIONS

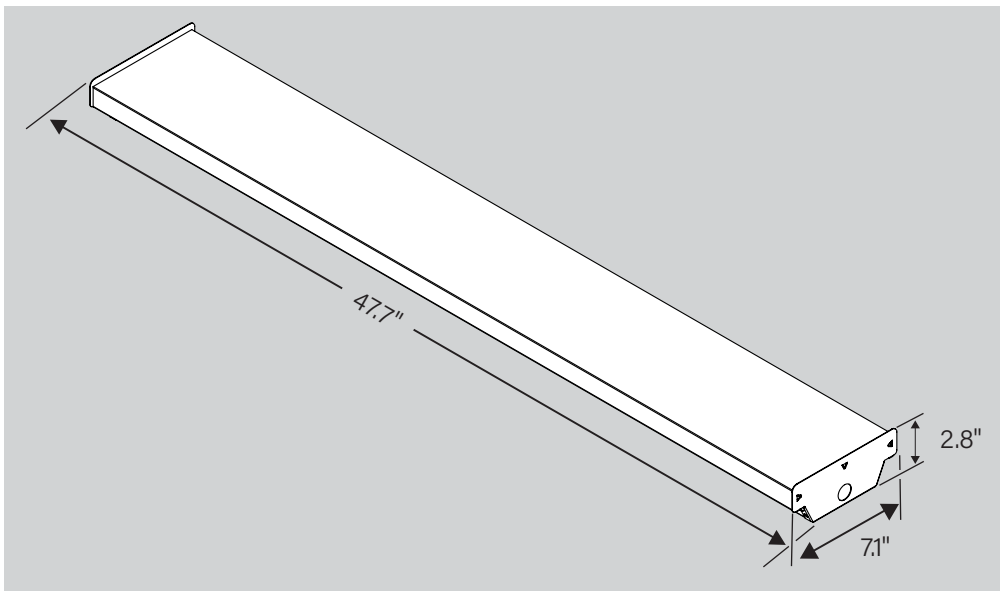

ACCESSORIES

SENSORS/CONTROLLERS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	Suffix*	Catalog Number	Description	UPC	Easy Code
	/MW3	KTS-MW3-UV-KO-K2	Microwave Sensor Kit, Includes 120-277V input to 12V DC convertor, 12V input sensor head, Nomex Sleeve, Extension Neck	843654134352	TBV-76



Microwave Sensor Kit
KTS-MW3-UV-KO-K2

* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

ORDERING INFORMATION

Order Code	Pack Quantity	UPC	Easy Code
W-LED-4-44PS-8CSA	1	843654137391	PKX-68