



Project: _____

Fixture Type: _____

Location: _____

Contact / Phone: _____

6" ECONOMY UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

IC22R

PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing • Energy efficient, sealed housing
• IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs • Can be completely covered with insulation
• When used with Air-Loc Gasket (see accessories), stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol **AIR-LOC** do not require gasket.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected—see reverse.

Socket Medium base porcelain with nickel-plated copper screw shell • Drop socket with spring to accommodate certain trim installation.



Trims Trim selection shown on reverse.

Labels U.L. listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps
• Union made • UL Listed / CSA certified • Trims 239, 241 and 242 are wet location approved for covered ceiling applications
• Trims 28, 29 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps**.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

DIMENSIONS

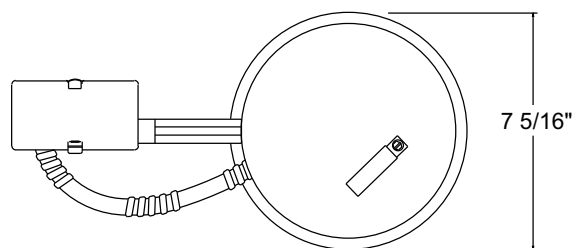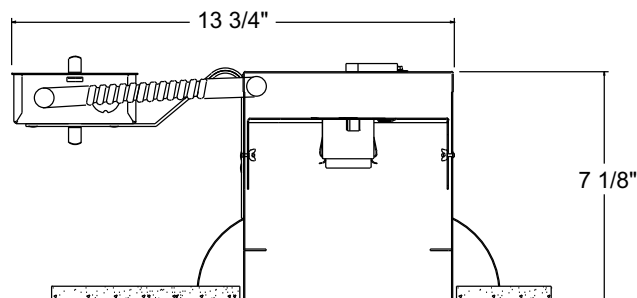

6 3/4" CEILING CUTOUT

INSTALLATION

Junction Box Pre-wired junction box, UL listed / CSA certified for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) 1/2" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

Housing IC housing, .032" aluminum sealed for Air-Loc Compliance • Double stack adjustable feature enables remodel spring to accommodate up to 1 3/4" ceiling thickness.

PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating (max.)
IC22R	120V	A19/BR30/BR40/PAR16/PAR20/PAR30/PAR30L/PAR38/R20 (See reverse for max. trim rating)

ACCESSORIES

Catalog No.	Description
ALG6R	Air-Loc Gasket


To order, specify catalog number.

6" ECONOMY UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

IC22R

TRIMS/LAMPS

Cat. No.	Description	Max. Lamp Rating		Cat. No.	Description	Max. Lamp Rating
 ** 24B-WH 24B-SC 24B-ABZ 24B-BL 24W-WH	Conical Black Baffle Conical Black Baffle Conical Black Baffle Conical Black Baffle Conical White Baffle	50W PAR30, 75W PAR30L, 65W BR30		248W-WH	R20 Eyeball in White Baffle	50W PAR20/R20
 ** 25B-WH 25B-SC 25B-ABZ 25B-BL 25W-WH	Straight Black Baffle Straight Black Baffle Straight Black Baffle Straight Black Baffle Straight White Baffle	50W PAR30, 65W BR30		249B-WH 249W-WH	BR30 Eyeball in Black Baffle BR30 Eyeball in White Baffle	75W PAR30L, 65W BR30
 Air-Loc 28B-WH ♦♦ 28W-WH ♦♦	Conical Black Baffle Conical White Baffle	60W A19, 65W BR30, 75W PAR30/30L, 90W PAR38, 90W BR40		264B-WH 264W-WH	PAR30 Adjustable - Black Baffle PAR30 Adjustable - White Baffle	50W PAR30
 Air-Loc 29C-WH ♦♦ 29W-WH ♦♦	Deep Cone Clear Cone Deep Cone White Cone	60W A19, 65W BR30, 75W PAR30/30L, 90W PAR38, 90W BR40		267C-WH 267G-WH 267B-WH 267HZ-WH 267WHZ-WH	PAR30 Adjustable - Clear Alzak® PAR30 Adjustable - Gold Alzak® PAR30 Adjustable - Black Alzak® PAR30 Adjustable - Haze PAR30 Adjustable - Wheat Haze	50W PAR30
 ** 27C-WH 27G-WH 27B-WH 27PT-SC 27W-WH 27HZ-WH 27WHZ-WH 27WHZ-ABZ	Conical Cone in Clear Alzak® Conical Cone in Gold Alzak® Conical Cone in Black Alzak® Conical Cone in Pewter Alzak® Conical Cone in Gloss White Conical Cone in Haze Conical Cone in Wheat Haze Conical Cone in Wheat Haze	50W PAR30, 75W PAR30L, 65W BR30		XR30101WH XR30101BL XR30101GP XR30101SL	AVIO Square Gimbal Ring - White AVIO Square Gimbal Ring - Black AVIO Square Gimbal Ring - Graphite AVIO Square Gimbal Ring - Silver	75W PAR30
 ** 244B-WH 244W-WH	Conical Black Baffle Conical White Baffle	75W PAR30L, 60W PAR30, 65W BR30		239-WH ♦	Frosted Lens	40W A19
 ** 247C-WH 247G-WH 247B-WH 247HZ-WH 247WHZ-WH	Cone - Clear Alzak® Cone - Gold Alzak® Cone - Black Alzak® Cone - Haze Cone - Wheat Haze	75W PAR30L, 65W BR30, 75W PAR30		241-WH ♦ 241-PW ♦	Drop Opal with Reflector Shower / Closet Light	40W A19
	Open Frame	65W BR30		242-WH ♦ 242-SC ♦ 242-ABZ ♦	Shower Trim, Frosted Lens with Clear Center	45W PAR38
	Regressed Open Frame	75W R / BR30		9324-SC	Luminous Disc	50W PAR30, 65W BR30, 75W PAR30
	Multiplier - Clear Alzak®	60W A19		9702	Luminous Collar	50W PAR30, 65W BR30, 75W PAR30L
	Multiplier - Gold Alzak®			9024W-WH	White Octagonal w/ White Baffle	50W PAR30, 65W BR30, 75W PAR30
	Multiplier - Gloss White			9524-SC	Chrome Band	65W BR30, 50W PAR30, 75W PAR30L
	Black Cylinder w/ Black Baffle	60W PAR16	Trim Size: 7 $\frac{5}{8}$ " O.D. (except Cat. Nos. 228, 229, 241, 9024, - 8" O.D., Cat. No. 9702 - 7 $\frac{3}{4}$ " O.D.). Trim Finish: ABZ - Classic Aged Bronze, BL - Black, GP - Graphite, PW - Plastic White (Polycarbonate material shower trim), SC - Satin Chrome, SL - Silver, WH - White. Alzak is a registered trademark of Alcoa Corp. Note: In Canada when insulation is present, Type IC fixtures must be used.			
	White Cylinder w/ White Baffle		Air-Loc JUNO IC housings meet IECC Energy Code requirements per ASTM E283. Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.			
	R20 Regressed Eyeball	50W PAR20/R20	♦ UL Listed for use in wet location.			
	BR30 Regressed Eyeball	75W PAR30L, 65W BR30	♦♦ UL Listed for use in wet location with outdoor rated lamp.			
	BR30 Regressed Eyeball		** NOTE: TR6 Trim Ring compatible with 24, 25, 27, 244, 247, 264, 267 trims.			
	BR30 Regressed Eyeball					