



CANOPY LIGHT

Morelux P/N: CVL403/CVL503







PRODUCT SPECIFICATIONS

SYSTEM WATTAGE	20W/35W,50W/70W
LUMENS	2200LM/3476LM,5530LM/6911LM
EFFICACY	UP TO 115LPW
INPUT VOLTAGE	120-277V
CCT	3000K,4000K,5000K
CRI	> 70
WEIGHT	5.5lbs,7.6lbs
AMBIENT TEMP.	-30 - 40°C
LED Performance	L70>50000h
STANDARD WARRANTY	5 Years

PRODUCT FEATURES

- Impact & weather resistant fixture with die cast back housing and polycarbonate Prismatic lenses.
- Universal mounting plate with easy hook mechanism for hands free installation.
- Capable for conduit wiring application.
- Name brand chip and driver @ 5 year warranty



PRODUCT DIMENSIONS

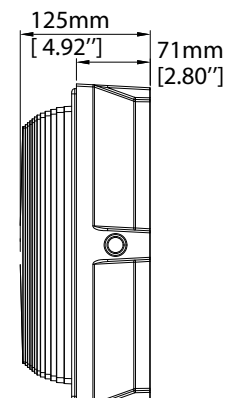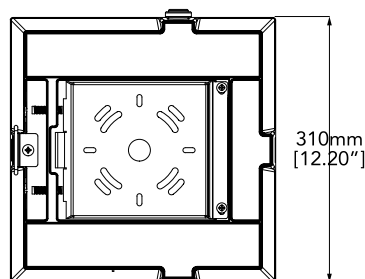

CATALOG NUMBER Example: (CVL403-20W-40K-V8-D-PC-S1-BZ)

MODEL	WATTAGE	CCT	VOLTAGE	DIMMING OPTION	OPTIONS	SURGE PROTECTOR	HOUSING FINISH
CVL403	20W 35W	30K = 3000K 40K = 4000K 50K = 5000K	V8 = 120-277V	N = Non-Dimming D = Dimming	NA = None PC = Photocell	NA = None S1 = Surge Protector	BZ = Bronze SL = Silver WH = White GY = Gray BK = Black
CVL503	50W 70W						

PHOTOMETRY

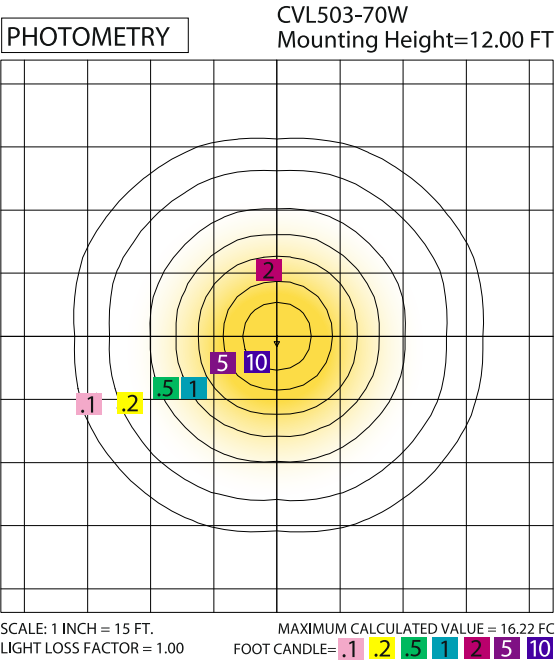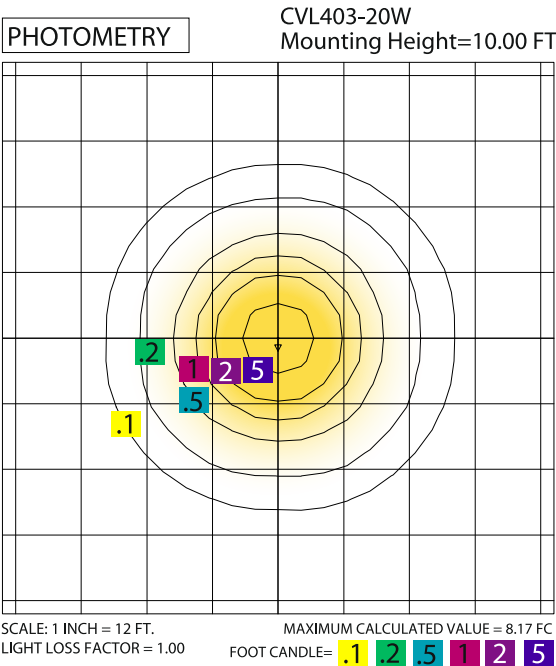

ADDITIONAL PHOTOMETRICS AVAILABLE ONLINE