



WALL PACK

Morelux P/N: DCL150




PRODUCT SPECIFICATIONS

SYSTEM WATTAGE	50W,70W
LUMENS	6500LM,7800LM
EFFICACY	UP TO 130LPW
INPUT VOLTAGE	120-277V
CCT	3000K,4000K,5000K
CRI	>70
WEIGHT	8.47lbs
AMBIENT TEMP.	-30-40°C
LED Performance	L70>50000h
STANDARD WARRANTY	5 Years

PRODUCT FEATURES

- Traditional Impact & weather resistant fixture with die cast aluminum housings and glare free prismatic glass lenses.
- Universal mounting plate with hinge hooks for easy hands free installation.
- Photocell and photocell cover.
- Brand name chip and driver @ 5 year warranty.

PRODUCT DIMENSIONS

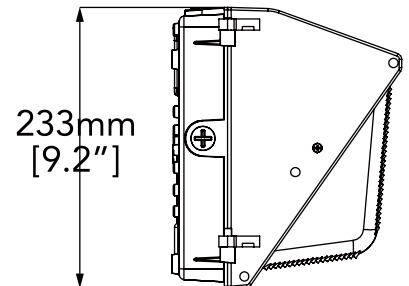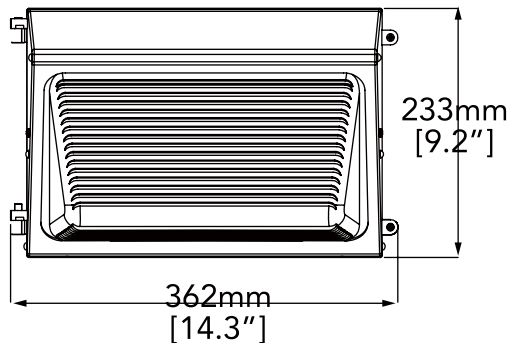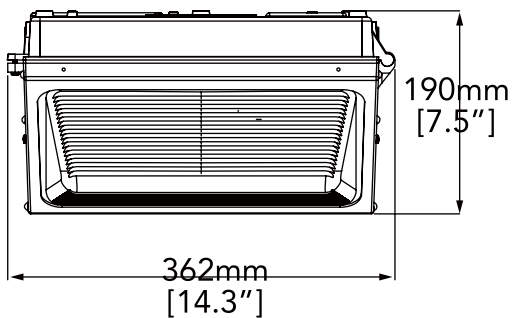

CATALOG NUMBER Example: (DCL150-50W-40k-V8-D-PC-S1-BZ)

MODEL	WATTAGE	CCT	VOLTAGE	DIMMING OPTION	OPTIONS	SURGE PROTECTOR	HOUSING FINISH
DCL150	50W 70W	30K = 3000K 40K = 4000K 50K = 5000K	V8 = 120-277V	D = Dimming N = Non-Dimming	PC = Photocell NA = None	NA = None S1 = Surge Protector	BZ = Bronze SL = Silver WH = White GY = Gray BK = Black

PHOTOMETRY

