



## WALL PACK

Morelux P/N: DCL150S




### PRODUCT SPECIFICATIONS

| SYSTEM WATTAGE    | 28W               |
|-------------------|-------------------|
| LUMENS            | 3300LM            |
| EFFICACY          | UP TO 118LPW      |
| INPUT VOLTAGE     | 120-277V          |
| CCT               | 3000K,4000K,5000K |
| CRI               | >70               |
| WEIGHT            | 6lbs              |
| AMBIENT TEMP.     | -30-40°C          |
| LED Performance   | L70>50000h        |
| STANDARD WARRANTY | 5 Years           |

### PRODUCT FEATURES

- Traditional Impact & weather resistant fixture with die cast housings and glare free prismatic polycarbonate lenses.
- Universal mounting plate with integral wire hooks for easy hands free installation.
- 0-10V dimming @ 5.1 DLC standard.
- Photocell and photocell over are optional.
- Lumileds chip and name brand driver @ 5 year warranty.

### PRODUCT DIMENSIONS

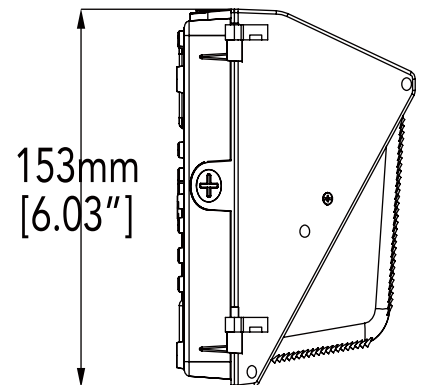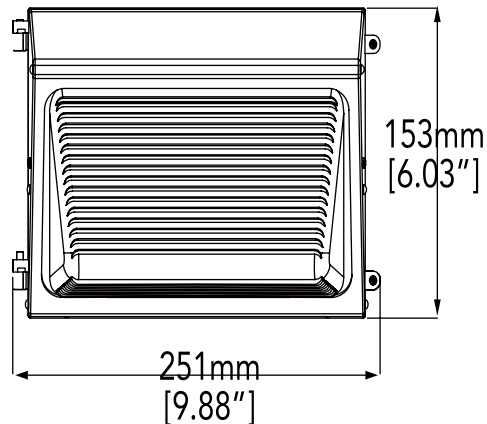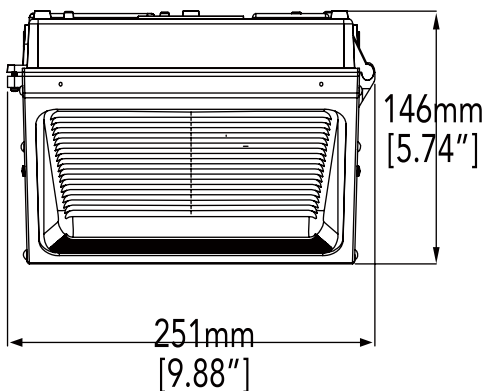

CATALOG NUMBER    Example: (DCL150S-28W-40k-V8-N-NA-NA-BZ)

| MODEL   | WATTAGE | CCT                                       | VOLTAGE       | DIMMING OPTION                 | OPTIONS                     | SURGE PROTECTOR                   | HOUSING FINISH                                                      |
|---------|---------|-------------------------------------------|---------------|--------------------------------|-----------------------------|-----------------------------------|---------------------------------------------------------------------|
| DCL150S | 28W     | 30K = 3000K<br>40K = 4000K<br>50K = 5000K | V8 = 120-277V | N = Non-Dimming<br>D = Dimming | NA = None<br>PC = Photocell | NA = None<br>S1 = Surge Protector | BZ = Bronze<br>SL = Silver<br>WH = White<br>GY = Gray<br>BK = Black |

PHOTOMETRY

