


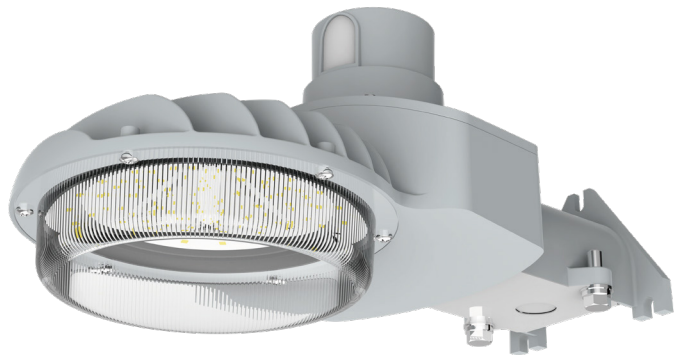

DUSK TO DAWN

SERIES: DTD430/DTD440/DTD450


PRODUCT SPECIFICATIONS

SYSTEM WATTAGE	20W,40W/55W,70W/75W
LUMENS	2401LM,5012LM/6970LM, 9152LM/9138LM
EFFICACY	UP TO 129LPW
INPUT VOLTAGE	120-277V, 347-480V
CCT	3000K,4000K,5000K
CRI	>70
WEIGHT	4lbs, 6.5lbs, 8lbs
AMBIENT TEMP.	-30-40°C
LED Performance	L70>50000h
STANDARD WARRANTY	5 Years

PRODUCT FEATURES

- Replace traditional HID barn light with long-life LED version, attractive fin design for thermal management.
- Impact & weather resistant fixture with die cast aluminum housings and polycarbonate Prismatic lenses.
- Universal mounting design available for wall mount and tenon mount.
- 3/7 pin receptacle optional.
- 0-10v dimming as an option.
- Name brand chip and driver @ 5 year warranty.




PRODUCT DIMENSIONS

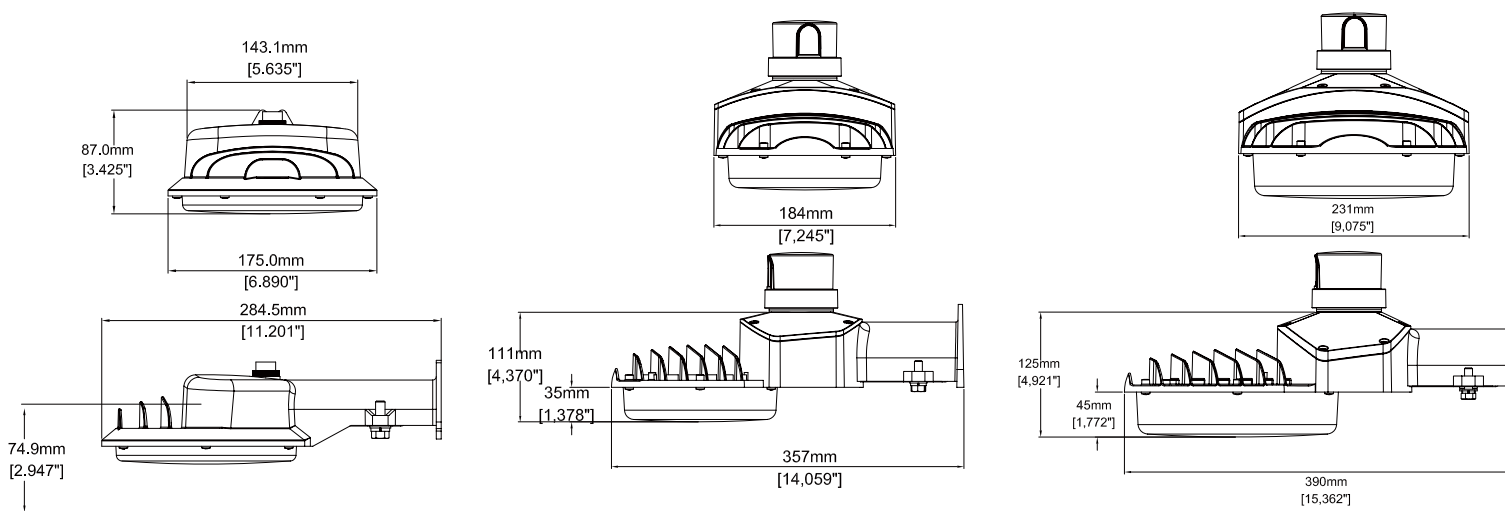

CATALOG NUMBER Example: (DTD430-20W-40K-V8-N-T3-S1-BZ-24)

MODEL	WATTAGE	CCT	VOLTAGE	DIMMING OPTION	DISTRIBUTION	SURGE PROTECTOR	HOUSING FINISH	MOUNTING
DTD430	20W	30K = 4000K 40K = 4000K 50K = 5000K	V8 = 120-277V V9 = 347-480V	D = Dimming N = Non-Dimming	T3=TYPE III T5=TYPE V NA=NONE	NA = None S1 = Surge Protector	BZ = Bronze SL = Silver WH = White GY = Gray BK = Black	24 = 24" Arm NA = None
DTD440	40W 55W							
DTD450	70W 75W							

PHOTOMETRY

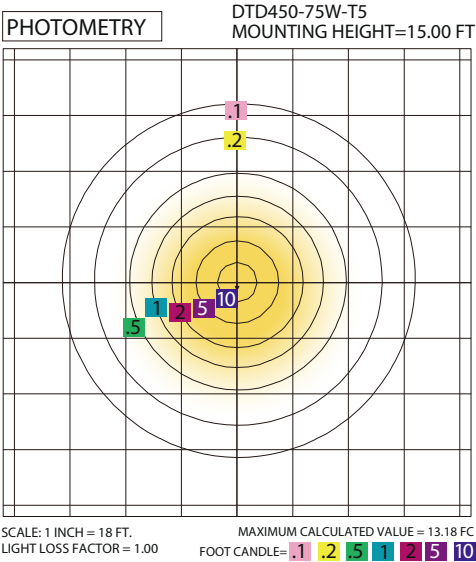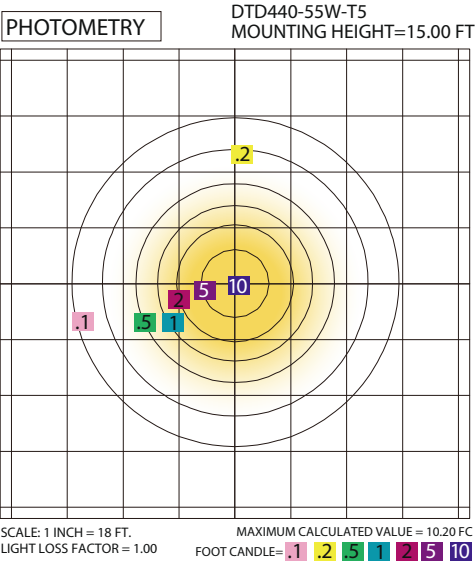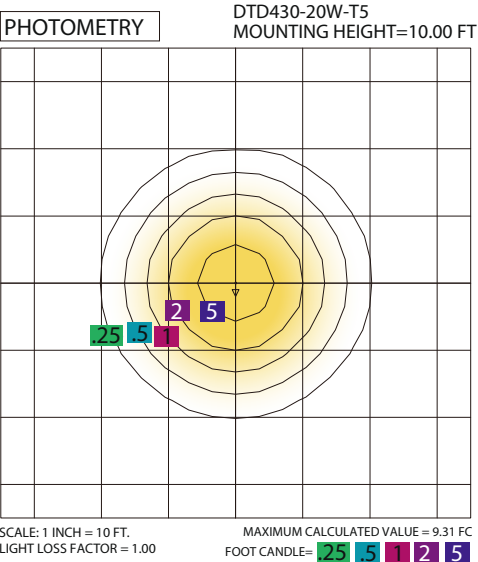

ADDITIONAL PHOTOMETRICS AVAILABLE ONLINE