



WALL/FLOOD COMBO

Morelux P/N: FWL110/FWL220/
FWL330/FWL440


PRODUCT SPECIFICATIONS

SYSTEM WATTAGE	15W,28W,45W,75W
LUMENS	1700LM,3200LM,5200LM, 8400LM
EFFICACY	UP TO 118LPW
INPUT VOLTAGE	120V
CCT	5 CCT changeable
CRI	> 70
WEIGHT	0.97lbs,1.23lbs,1.9lbs,2.87lbs
AMBIENT TEMP.	-30 - 40°C
LED Performance	L70>50000h
STANDARD WARRANTY	5 Years

PRODUCT FEATURES

- Wallpack and Floodlight combo. Adjustable wall mount and knuckle are quickly field-installable allowing the fixture to be seamlessly a wallpack and floodlight.
- Universal mounting plate with integral wire hooks for easy hands free wall mount installation.
- Impact & weather resistant fixture with die cast housings and clear polycarbonate lenses.
- 2700K,3000K,3500K,4000K,5000K CCT adjustable by remote @ 15W/28W
- Name brand chip and driver @ 5 year warranty

PRODUCT DIMENSIONS

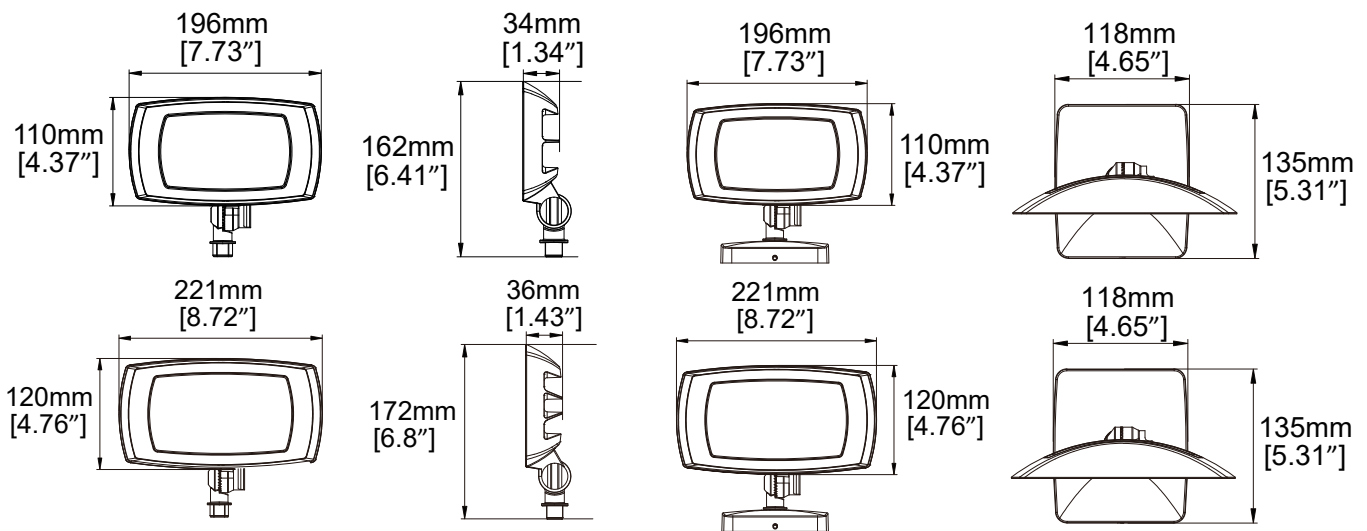



WALL/FLOOD COMBO

Morelux P/N: FWL110/FWL220/
FWL330/FWL440


PRODUCT SPECIFICATIONS

SYSTEM WATTAGE	15W,28W,45W,75W
LUMENS	1700LM,3200LM,5200LM, 8400LM
EFFICACY	UP TO 118LPW
INPUT VOLTAGE	120V
CCT	5 CCT changeable
CRI	> 70
WEIGHT	0.97lbs,1.23lbs,1.9lbs,2.87lbs
AMBIENT TEMP.	-30 - 40°C
LED Performance	L70>50000h
STANDARD WARRANTY	5 Years

PRODUCT FEATURES

- Wallpack and Floodlight combo. Adjustable wall mount and knuckle are quickly field-installable allowing the fixture to be seamlessly a wallpack and floodlight.
- Universal mounting plate with integral wire hooks for easy hands free wall mount installation.
- Impact & weather resistant fixture with die cast housings and clear polycarbonate lenses.
- 2700K,3000K,3500K,4000K,5000K CCT adjustable by remote @ 15W/28W
- Name brand chip and driver @ 5 year warranty

PRODUCT DIMENSIONS

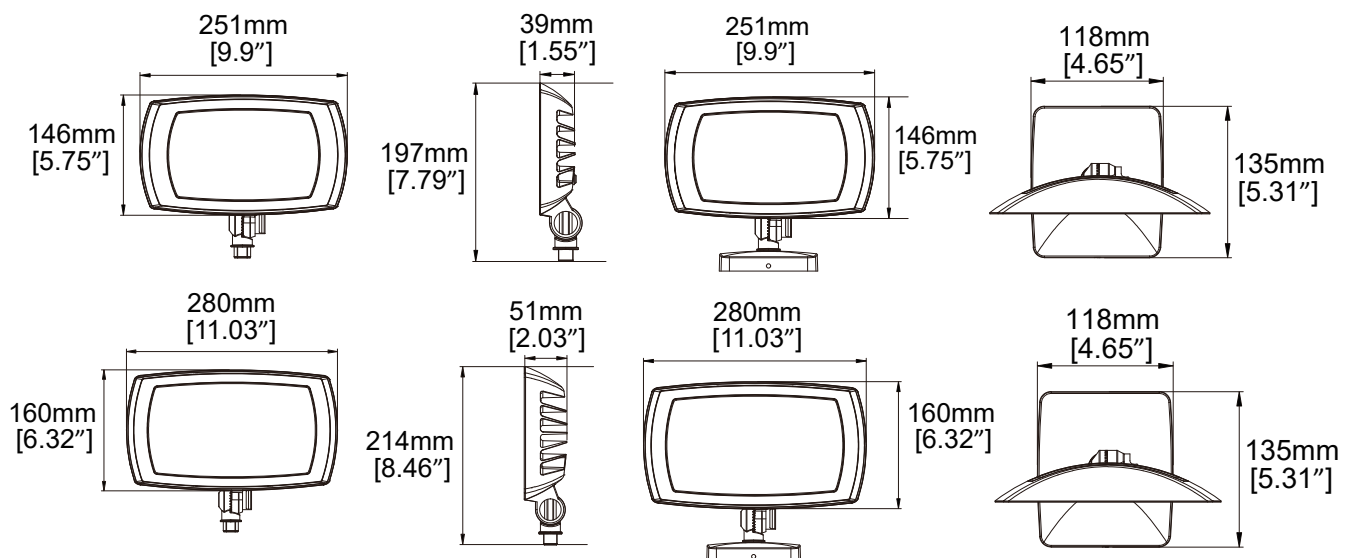

CATALOG NUMBER Example: (FWL110-15W-AD-V1-N-NA-BZ-WM)

MODEL	WATTAGE	CCT	VOLTAGE	DIMMING OPTION	OPTIONS	HOUSING FINISH	HOUNTING
FWL110	15W	30K = 3000K 40K = 4000K 50K = 5000K AD=CCT Adjustable	V1 = 120V	N = Non-Dimming	PC = Photocell NA = None	BZ = Bronze SL = Silver WH = White GY = Gray BK = Black	WM = Wall Mount KN = Knuckle
FWL220	28W						
FWL330	45W						
FWL440	75W						

PHOTOMETRY

