



WALL PACK

Morelux P/N: OWP200/OWP300


PRODUCT SPECIFICATIONS

SYSTEM WATTAGE	15W,28W
LUMENS	1780LM,3375LM
EFFICACY	UP TO 125LPW
INPUT VOLTAGE	120-277V
CCT	3000K,4000K,5000K
CRI	> 70
WEIGHT	1.65lbs,2.71lbs
AMBIENT TEMP.	-30 - 40°C
LED Performance	L70>50000h
STANDARD WARRANTY	5 Years

PRODUCT FEATURES

- Impact & weather resistant fixture with full polycarbonate front housing and die-cast aluminum back housing. Prismatic lens for better glare control
- Universal mounting plate with integral wire hooks for easy hands free installation
- Photocell included with optional photocell cover
- Name brand chip and driver @ 5 year warranty

PRODUCT DIMENSIONS

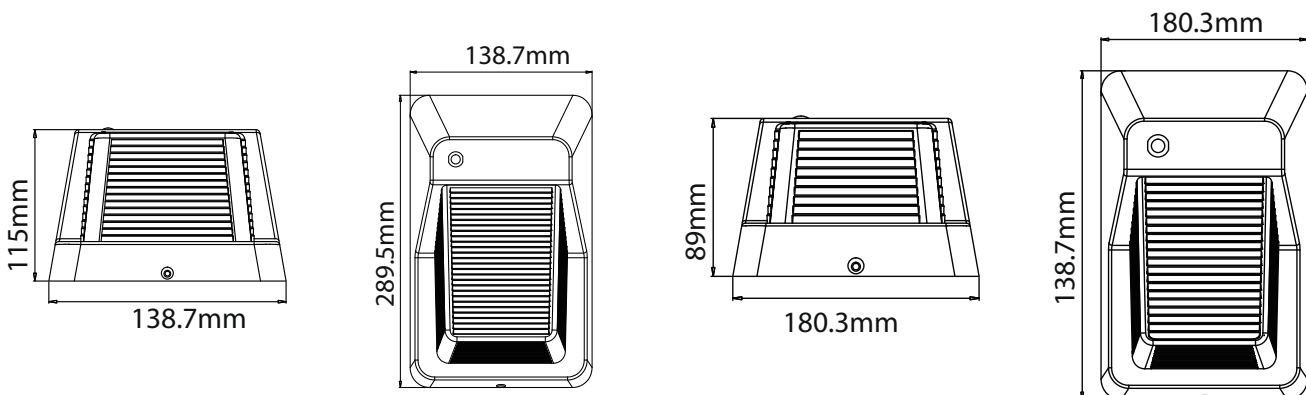


CATALOG NUMBER Example: (OWP200-15W-40K-V8-N-PC-BZ)

MODEL	WATTAGE	CCT	VOLTAGE	DIMMING OPTION	OPTIONS	HOUSING FINISH
OWP200	15W	30K = 3000K 40K = 4000K 50K = 5000K	V8 = 120-277V	N = Non-Dimming D = Dimming	PC = Photocell	BZ = Bronze SL = Silver WH = White GY = GRAY BK = Black
OWP300	28W					

PHOTOMETRY

PHOTOMETRY


OWP200-15W
Mounting Height=10.00 FT

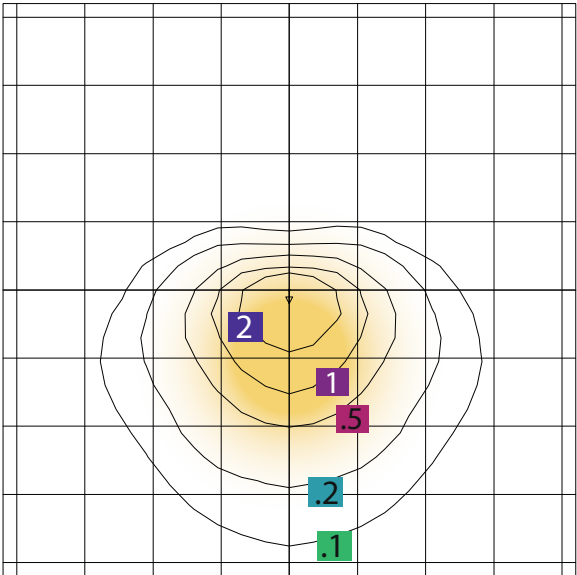

SCALE: 1 INCH = 12 FT.
LIGHT LOSS FACTOR = 1.00
MAXIMUM CALCULATED VALUE = 4.91 FC
FOOT CANDLE= .1 .2 .5 1 2

PHOTOMETRY

OWP300-28W
Mounting Height=10.00 FT

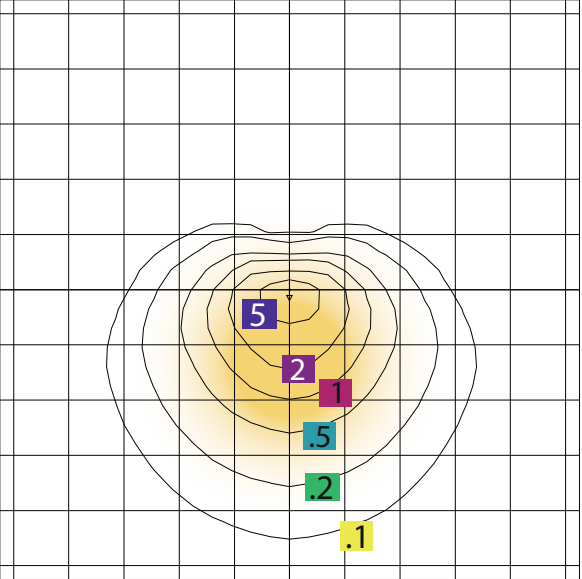

SCALE: 1 INCH = 15 FT.
LIGHT LOSS FACTOR = 1.00
MAXIMUM CALCULATED VALUE = 8.37 FC
FOOT CANDLE= .1 .2 .5 1 2 5