



LED BOLLARDS

SERIES: SRB800


PRODUCT SPECIFICATIONS

SYSTEM WATTAGE	20W/35W
LUMENS	2700LM/4600LM
EFFICACY	UP TO 138LPW
INPUT VOLTAGE	120-277V, 374V/480V
CCT	3000k, 4000K, 5000K
CRI	> 70
WEIGHT	17.6lbs
AMBIENT TEMP.	-30 - 40°C
LED Performance	L70>50000h
STANDARD WARRANTY	5 Years

PRODUCT FEATURES

- Impact & weather resistant fixture with Aluminum housings and polycarbonate lenses
- 180/360 degree lighting distribution available
- Easy to install and maintenance-free
- 0-10v dimming as standard @ DLC 5.1 Premium
- Name brand chip and high quality driver @ 5 year warranty


PRODUCT DIMENSIONS

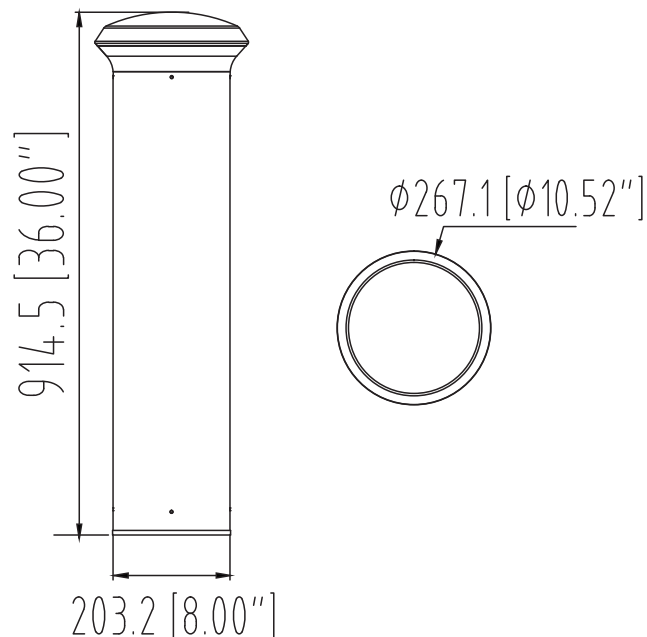

CATALOG NUMBER Example: (SRB800-20W-40K-V8-N-R3-S1-38-BZ)

MODEL	WATTAGE	CCT	VOLTAGE	DIMMING OPTION	DISTRIBUTION BEAM ANGLE	SURGE PROTECTOR	HEIGHT	HOUSING FINISH
SRB800	20W 35W	30K = 3000K 40K = 4000K 50K = 5000K	V8 = 120-277V V7 = 347/480V	D = Dimming N = Non-Dimming	R3 = 180°	NA = None S1 = Surge Protector	38=38" 42=42"	BZ = Bronze SL = Silver WH = White GY = Gray BK = Black
					R0 = 360°			

PHOTOMETRY

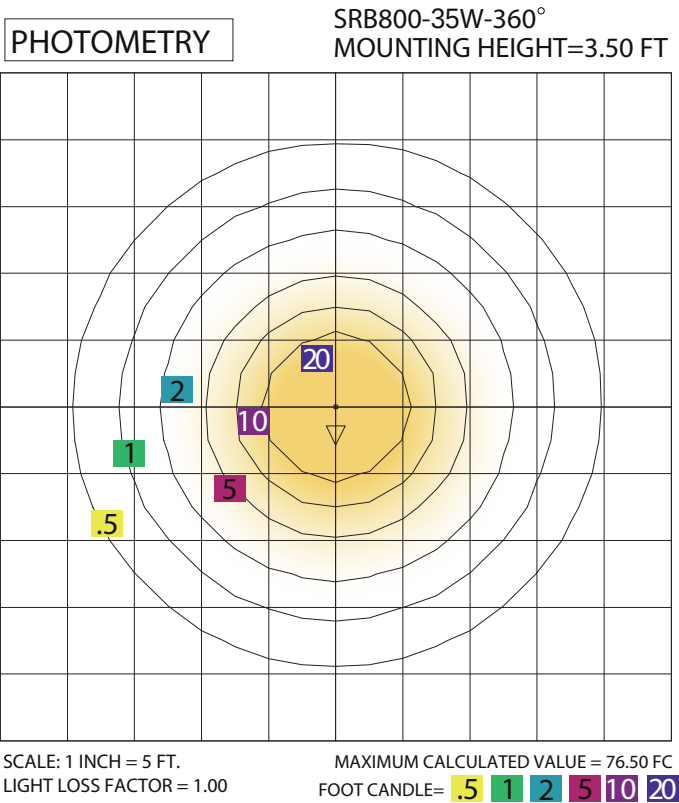

ADDITIONAL PHOTOMETRICS AVAILABLE ONLINE