


LED RETROFIT KIT TROFFER

[TRS SERIES]

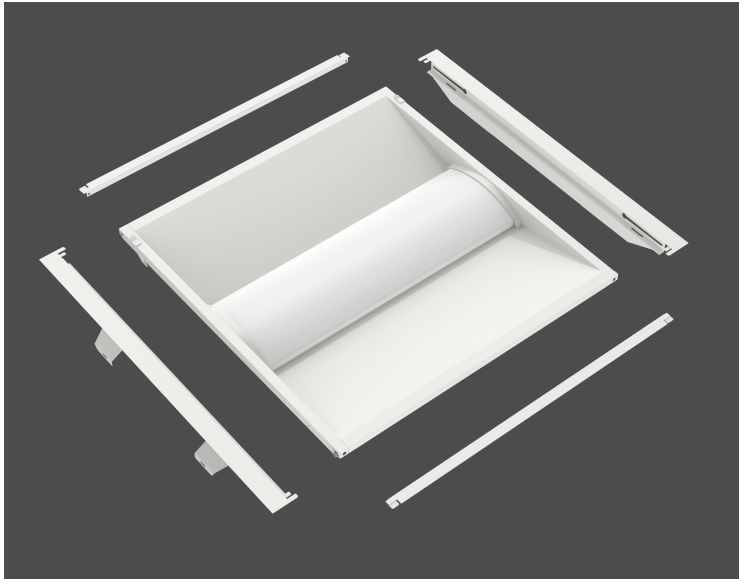

Features

- Ideal replacement for T8 Tubes.
- 9 in 1 (3CCTs and 3 wattages selectable), less SKU, less inventory managing cost.
- PC lens, never turn yellowing. Uniformity light, low glare with high reliability.
- Multi-sizes, multi-lumen packages. Meet your various requests, 125LPW high efficacy, energy saving.
- Trim plate available for option, Detachable End-cap, Maintenance is convenient.
- Factory or Field Install EB available, 90 mins backup time, Integrated test button, easy installation.

WARRANTY

- 5 Years

INSTALLATION

- Replacement Retrofit Kit, It is used to transform traditional fluorescent lamps without removing the whole luminaire.

CERTIFICATIONS

- UL Listed for Damp Locations
- DLC PREMIUM&STANDARD
- -20°C to 35°C (-4°F to 95°F)
- RoHS, FCC



SPECIFICATION

CONSTRUCTION

- Housing: Galvanized sheet in white finish.


OPTICS

- PC diffuser
- SDCM < 4
- 120° Beam angle

ELECTRICAL

- 0-10VDC Dimming (5%-100%)
- 120-277VAC or 120-34VAC Input
- PF: > 0.9, THD: < 20%

DIMENSIONS

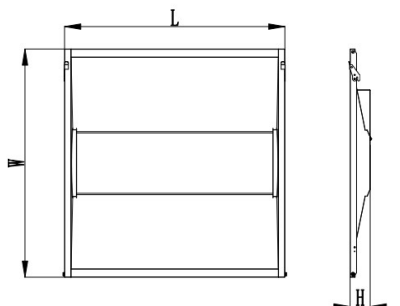

Size (FT)	LxWxH	LxWxH(With bracket)
2' x 4'	1153*564*50mm	1218x606x50mm
2' x 2'	544*564*50mm	609x606x50mm
1' x 4'	1153*277*50mm	1218x312x50mm

MORELUX LIGHTING LIMITED

Add: 17/F, Guangbo Mansion, #1357, Yinxian Avenue, Yinzhou District, China 315100

Tel: +86-181 7654 0560 Fax: +86-574-87717000 E-Mail: holly.huang@morelux.com Web: www.morelux.com


PRODUCT SERIES	SIZE	VOLTAGE	EFFICACY	WATTAGE	CRI	SENSOR OPTION	EB DRIVER OPTION
TRS	22	U	P	40	80	Blank	D
TRS	22	U=120-277V H=120-347V	P=Premium (125lm/w)	30 (20/25/30)	80	Blank=Without sensor M=Microwave sensor Sensor	Blank =without Emergency Backup E =with Emergency Backup
	14			30 (20/25/30)			
	24			40 (30/35/40)			

PARAMETERS


MODEL NUMBER	SIZE (FT)	VOLTAGE (V)	WATTAGE (W)	EFFICACY (LPW)	LUMEN (LM)	CCT (K)	WEIGHT (lbs)
TRS-22-X-P-30-80-WY	2' x 2'	120-277V 120-347V	20/25/30	125	2500/ 3150 / 3750	3500K 4000K 5000K	3.1
TRS-14-X-P-30-80-WY	1' x 4'		20/25/30	125	2500/ 3150 / 3750		3.2
TRS-24-X-P-40-80-WY	2' x 4'		30/35/40	125	3750/ 4550 / 5000		6.2

Note: X can be U/H , W can be Blank/M,Y can be Blank/E.


PHOTOMETRY



MOUNTINGS/ACCESSORIES



DC EB Driver Kit



Spacing bar