

LED VAPOR TIGHT LIGHT

[VCWS SERIES]



Features

- 2FT, 4FT sizes available.
- 9 in 1 (3CCTs and 3 wattages selectable), less SKU, less inventory managing cost.
- 5VA PC Housing, UV and impact resistance, never turn yellowing.V-0 PC diffuser, UV and impact resistance, Clear or frosted optional, prismatic design with low glare.
- Smart control optional, (Microwave Occupancy sensor).
- Factory Install EB option available. 90 mins emergency time.

SPECIFICATION

CONSTRUCTION

- Housing:UV-stabilized and high impact-resistant,PC housing with gasket. 5VA rated Housing.
- Latches: 304 stainless steel latches

OPTICS

- Lens:UV-stabilized and high impact-resistant,clear transparent or frosted,PC lens with prismatic with low glare
- SDCM<5
- CCT: 3500K-4000K-5000K
- 120° Beam angle

ELECTRICAL

- 0-10VDC Dimming (5%-100%)
- 120-277VAC or 120-347VAC.
- PF:>0.9,THD:<20%

WARRANTY

- 5 Years. (For special environments or applications which will cause PC damaged.please contact the agent or manufacturer before installation)

INSTALLATION


- stainless steel surface mounting brackets(2pcs included) allows for ceiling or suspended mount or wall mount
- Optional stainless steel V-hooks availabel for chain hanging (V-hooks and chain not included)

CERTIFICATIONS

- ETL Listed for Damp Locations • DLC PREMIUM
- -20°C to 40°C (-4°F to 104°F)
- RoHS, FCC,NSF,NEMA4X,IP65,IK08



DIMENSIONS



Size (FT)	LxWxH
2	23.62"x4.96"x3.58"
4	47.24"x4.96"x3.58"

MORELUX LIGHTING LIMITED

Add:17/F. Guangbo Mansion. #1357. Yinxian Avenue. Yinzhou District. China 315100
Tel:+86-181 7654 0560 Fax:+86-574-87717000 E-Mail:holly.huang@morelux.com Web:www.morelux.com

MAKE-TO-ORDER


Example: (VCWS-4FT-U-P-40-80-M-EB)

PRODUCT T SERIES	SIZE	VOLTAGE	EFFICACY	WATTAGE	CRI	SENSOR OPTION	EB DRIVER OPTION
VCWS	2FT	U	P	20	80	M	EB
VCWS	2FT	U=120-277V H=120-347V	P=130LM/W	25 (15/20/25)	80=80CRI	Blank=Without sensor M=with Microwave Motion Sensor	Blank =without Emergency Backup EB =with Emergency Backup
	40 (20/30/40)						
	48 (36/42/48)						
	50 (30/40/50)						

MAKE-TO-ORDER

MODEL NUMBER	SIZE (FT)	VOLTAGE (V)	WATTAGE (W)	EFFICACY (LPW)	LUMEN (LM)	CCT (K)	WEIGHT (lbs)
VCWS-2FT-X-P-25-80-W-Y	2FT	120-277V	15/20/25	130	1950/2600/3250	3500K- 4000K- 5000K	2.98
VCWS-4FT-X-P-40-80-W-Y	4FT		20/30/40	130	2600/3900/5200		4.93
VCWS-4FT-X-P-48-80-W-Y		36/42/48	130	4680/5460/6240	4.95		
VCWS-4FT-X-P-50-80-W-Y		30/40/50	130	3900/5200/6500	4.95		

PHOTOMETRY

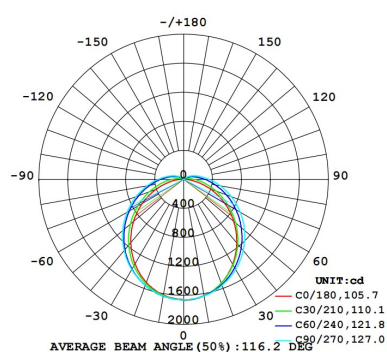

MOUNTINGS/ACCESSORIES



Suspending Chain



Emergency backup



Sensor

MORELUX LIGHTING LIMITED

Add:17/F. Guangbo Mansion. #1357. Yinxian Avenue. Yinzhou District. China 315100
 Tel:+86-181 7654 0560 Fax:+86-574-87717000 E-Mail:holly.huang@morelux.com Web:www.morelux.com