

LED WRAPROUND LIGHT

[WRS SERIES]



Features

- 9 in 1 (3CCTs and 3 wattages selectable), less SKU, less inventory managing cost.
- Two-sizes available 2FT 4FT.
- Easy wiring, easy Maintenance.
- PC diffuser, Clear or frosted optional, low glare.
- Microwave Occupancy sensor optional .
- Factory Install EB option available. 90 mins emergency time.

SPECIFICATION

CONSTRUCTION

- Housing: Galvanized sheet in white finish.

OPTICS

- Lens: PC lens with prismatic with low glare
- SDCM < 4
- CCT: 3500K-4000K-5000K
- 110° Beam angle

ELECTRICAL

- 0-10VDC Dimming (5%-100%)
- 120-277VAC, PF: > 0.9, THD: < 20%

WARRANTY

- 5 Years.

INSTALLATION


- stainless steel surface mounting brackets
- Optional stainless steel V-hooks available for chain hanging (V-hooks and chain not included)

CERTIFICATIONS

- ETL Listed for Damp Locations • DLC PREMIUM
- -20°C to 35°C (-4°F to 95°F)
- RoHS, FCC, NSF, NEMA4X, IP66, IK10



DIMENSIONS

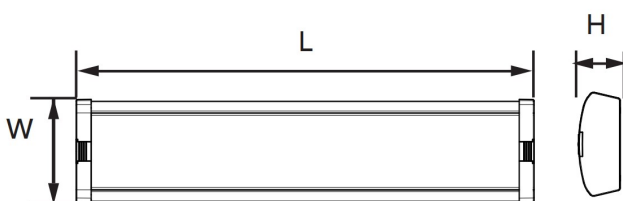

Size (FT)	LxWxH
2	24.37"x5.31"x2.17"
4	47.60"x5.31"x2.17"

MORELUX LIGHTING LIMITED

Add: 17/F. Guangbo Mansion. #1357. Yinxian Avenue. Yinzhou District. China 315100
Tel: +86-181 7654 0560 Fax: +86-574-87717000 E-Mail: holly.huang@morelux.com Web: www.morelux.com

MAKE-TO-ORDER


Example: (WRS-2FT-U-S-22-CCT)

PRODUCT SERIES	SIZE	VOLTAGE	EFFICACY	WATTAGE	CCT	SENSOR OPTION	EB DRIVER OPTION
WRS	2FT	U	S	20	35K		
WRS	2FT	U=120-277V H=120-347V	S=115LPW Blank=125 LPW	22 (15/18/22)	35K=3500K 40K=4000K 50K=5000K CCT=3500K /4000K/5000K	Blank=Without sensor P=with PIR Sensor M=with Motion Sensor B=with Bluetooth Sensor L=with Bluetooth+ PIR Sensor	Blank =without Emergency Backup E =with Emergency Backup
	4FT			39 (29/33/39)			

MAKE-TO-ORDER

MODEL NUMBER	SIZE (FT)	VOLTAGE (V)	WATTAGE (W)	EFFICACY (LPW)	LUMEN (LM)	CCT (K)	WEIGHT (lbs)
WRS-2FT-X-S-22-xxK-WY	2FT	120-277V 120-347V	15/18/22	115	1725/2070/2530	3500K	2.31
WRS-4FT-X-S-39-xxK-WY	4FT		29/33/39	115	3335/3795/4485	4000K	4.19
WRS-2FT-X-22-xxK-WY	2FT		15/18/22	125	1875/2250/2750	5000K	2.31
WRS-4FT-X-39-xxK-WY	4FT		29/33/39	125	3625/4125/4875	CCT=3500K /4000K/5000K	4.19

PHOTOMETRY

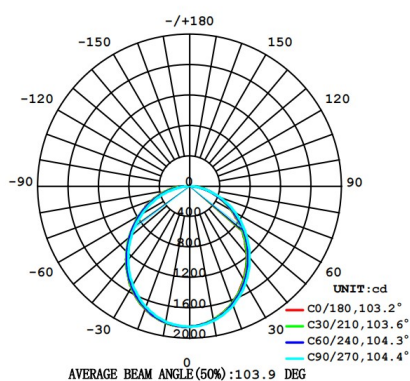

MOUNTINGS/ACCESSORIES




Suspending Chain



Sensor Kit



DC EB Driver Kit



wire guard

MORELUX LIGHTING LIMITED

Add:17/F. Guangbo Mansion. #1357. Yinxian Avenue. Yinzhou District. China 315100

Tel:+86-181 7654 0560 Fax:+86-574-87717000 E-Mail:holly.huang@morelux.com Web:www.morelux.com