



Submittal Data Sheet

Series Name: Olympus Cassette
Model Number: CASSETTE09HP-230C-0

High Wall Heat Pump System


Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:




* Refer to AHRI for Certificates

INDOOR SPECIFICATION		
Indoor Air Flow (Turbo/H/M/L/Si)	CFM	353.2/312/264.9/182.5/147.2
Indoor Noise Level (Turbo/H/M/L/Si)	dBA	42.5/40/37.5/26/24
Dimension (WxDxH)	inch	22.4 x 22.4 x 9.65
	mm	570 x 570 x 245
Package (WxDxH)	inch	
	mm	
Net/Gross Weight	lbs	35.27/41.89
	kg	16/19
ELECTRICAL		
Power Supply	V, Hz, Ph	208 / 230V, 60Hz, 1Ph
Indoor Fan Motor RLA	A	0.8
Indoor Fan Motor	W	45

Indoor Unit Dimension (Internal Pump)

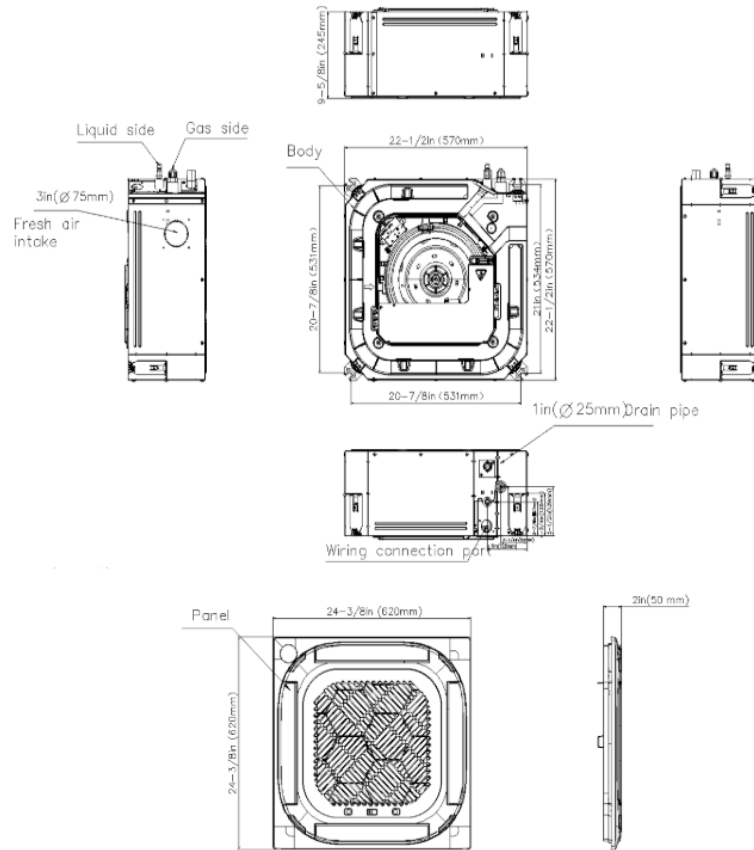

Installation Instruction

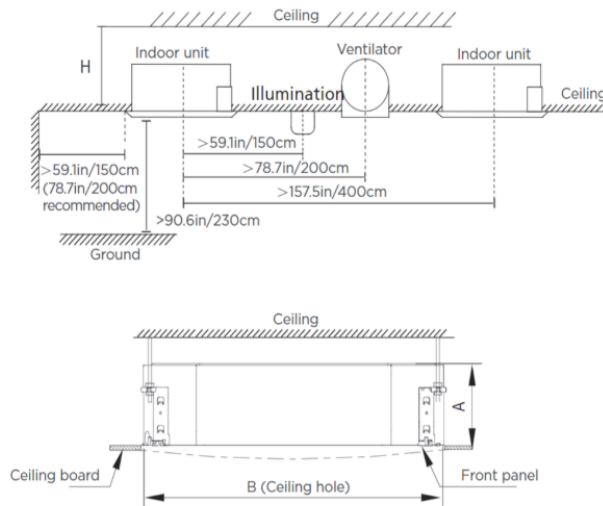

Distance from ceiling relative to height of indoor unit

Model	Length of A	Length of H	Length of B
9K/12K/18K	9.6in (245mm)	>10.8in (275mm)	23.6in (600mm)
24K	8.03in (205mm)	9.06in (230mm)	35.4in (900mm)

Features

- 360° air flow
- Remote on-off and alarm ports
- Refrigerant leakage detection sensor
- Humidity sensor
- Built-in pump
- Fan speed stages: 1~100%
- Wireless remote



Submittal Data Sheet

Series Name: Olympus Cassette
Model Number: CASSETTE12HP-230C-0

High Wall Heat Pump System


Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:




* Refer to AHRI for Certificates

INDOOR SPECIFICATION		
Indoor Air Flow (Turbo/H/M/L/Si)	CFM	417.9/364.9/306.1/194.2/147.2
Indoor Noise Level (Turbo/H/M/L/Si)	dBA	46/43.5/40.5/27.5/26
Dimension (WxDxH)	inch	22.44 x 22.44 x 9.65
	mm	570 x 570 x 245
Package (WxDxH)	inch	
	mm	
Net/Gross Weight	lbs	35.27/41.89
	kg	16/19
ELECTRICAL		
Power Supply	V, Hz, Ph	208 / 230V, 60Hz, 1Ph
Indoor Fan Motor RLA	A	0.9
Indoor Fan Motor	W	45

Indoor Unit Dimension

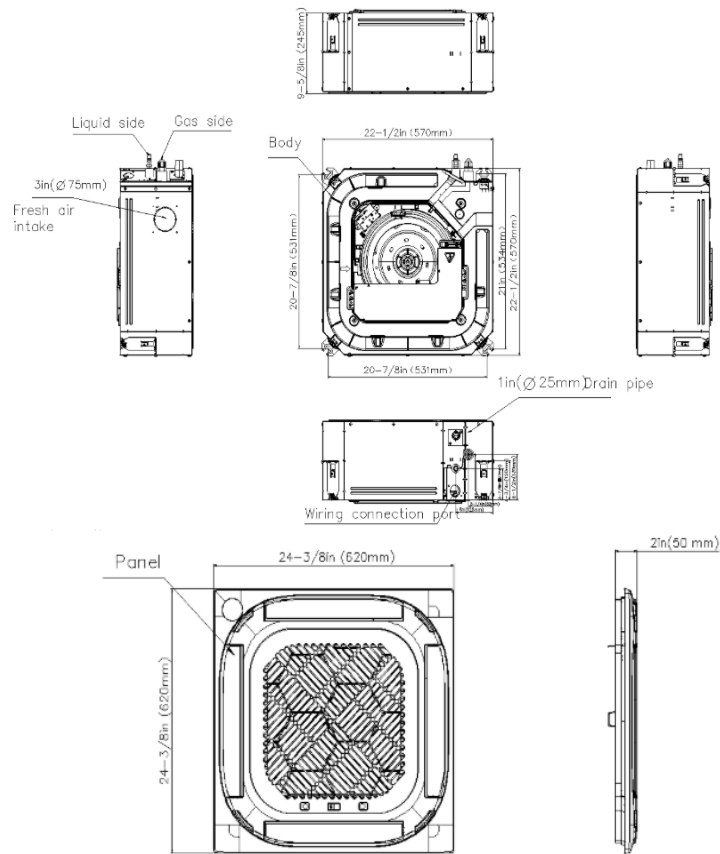

Installation Instruction

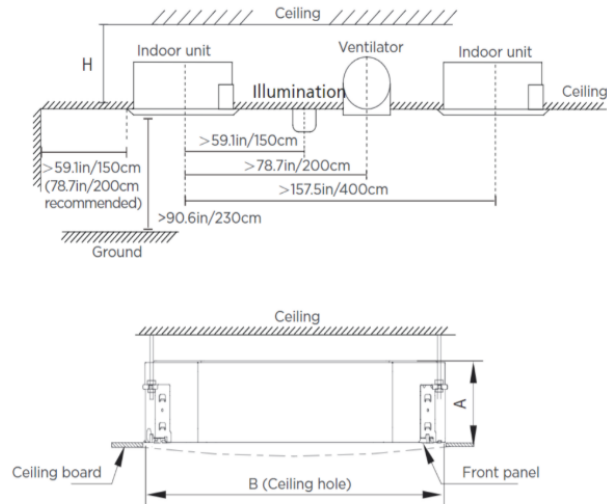

Distance from ceiling relative to height of indoor unit

Model	Length of A	Length of H	Length of B
9K/12K/18K	9.6in (245mm)	>10.8in (275mm)	23.6in (600mm)
24K	8.03in (205mm)	9.06in (230mm)	35.4in (900mm)

Features

- 360° air flow
- Remote on-off and alarm ports
- Refrigerant leakage detection sensor
- Humidity sensor
- Built-in pump
- Fan speed stages: 1~100%
- Wireless remote



Submittal Data Sheet

Series Name: Olympus Cassette
Model Number: CASSETTE18HP-230C-0

High Wall Heat Pump System



Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



* Refer to AHRI for Certificates

INDOOR SPECIFICATION		
Indoor Air Flow (Turbo/H/M/L/Si)	CFM	447.3/388.5/317.8/19.2/147.2
Indoor Noise Level (Turbo/H/M/L/Si)	dBA	48/44.5/41/27.5/23.5
Dimension (WxDxH)	inch	22.44 x 22.44 x 9.65
	mm	570 x 570 x 245
Package (WxDxH)	inch	
	mm	
Net/Gross Weight	lbs	35.27/41.89
	kg	16/19
ELECTRICAL		
Power Supply	V, Hz, Ph	208 / 230V, 60Hz, 1Ph
Indoor Fan Motor RLA	A	1
Indoor Fan Motor	W	45

Indoor Unit Dimension	

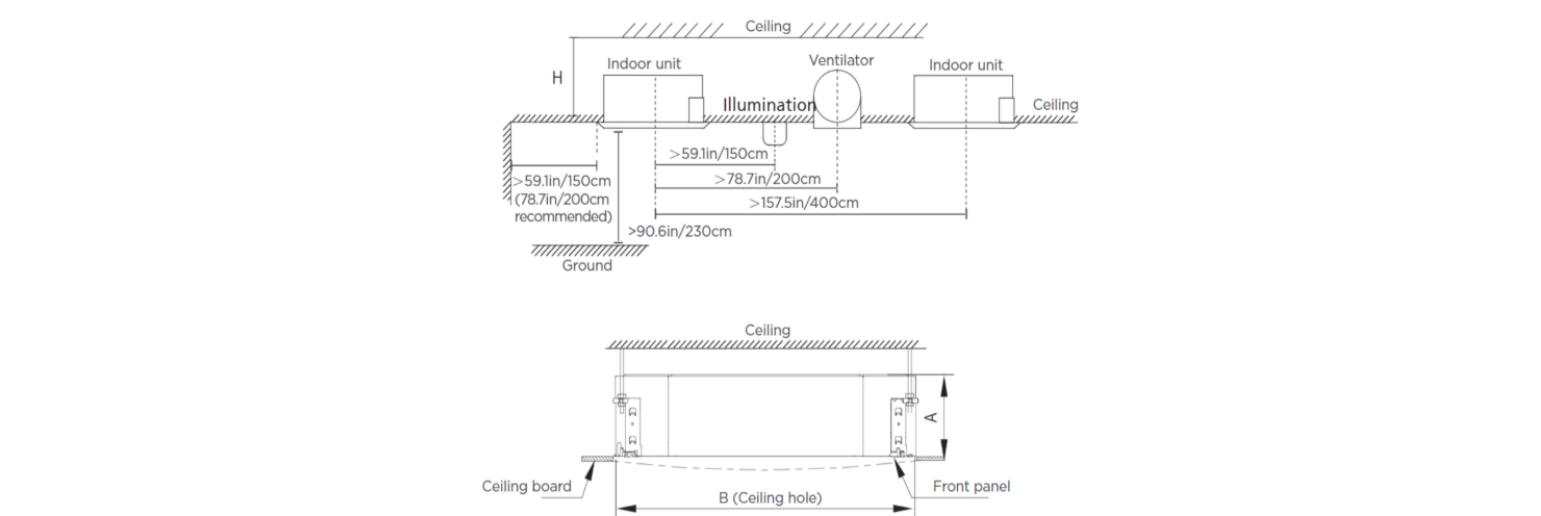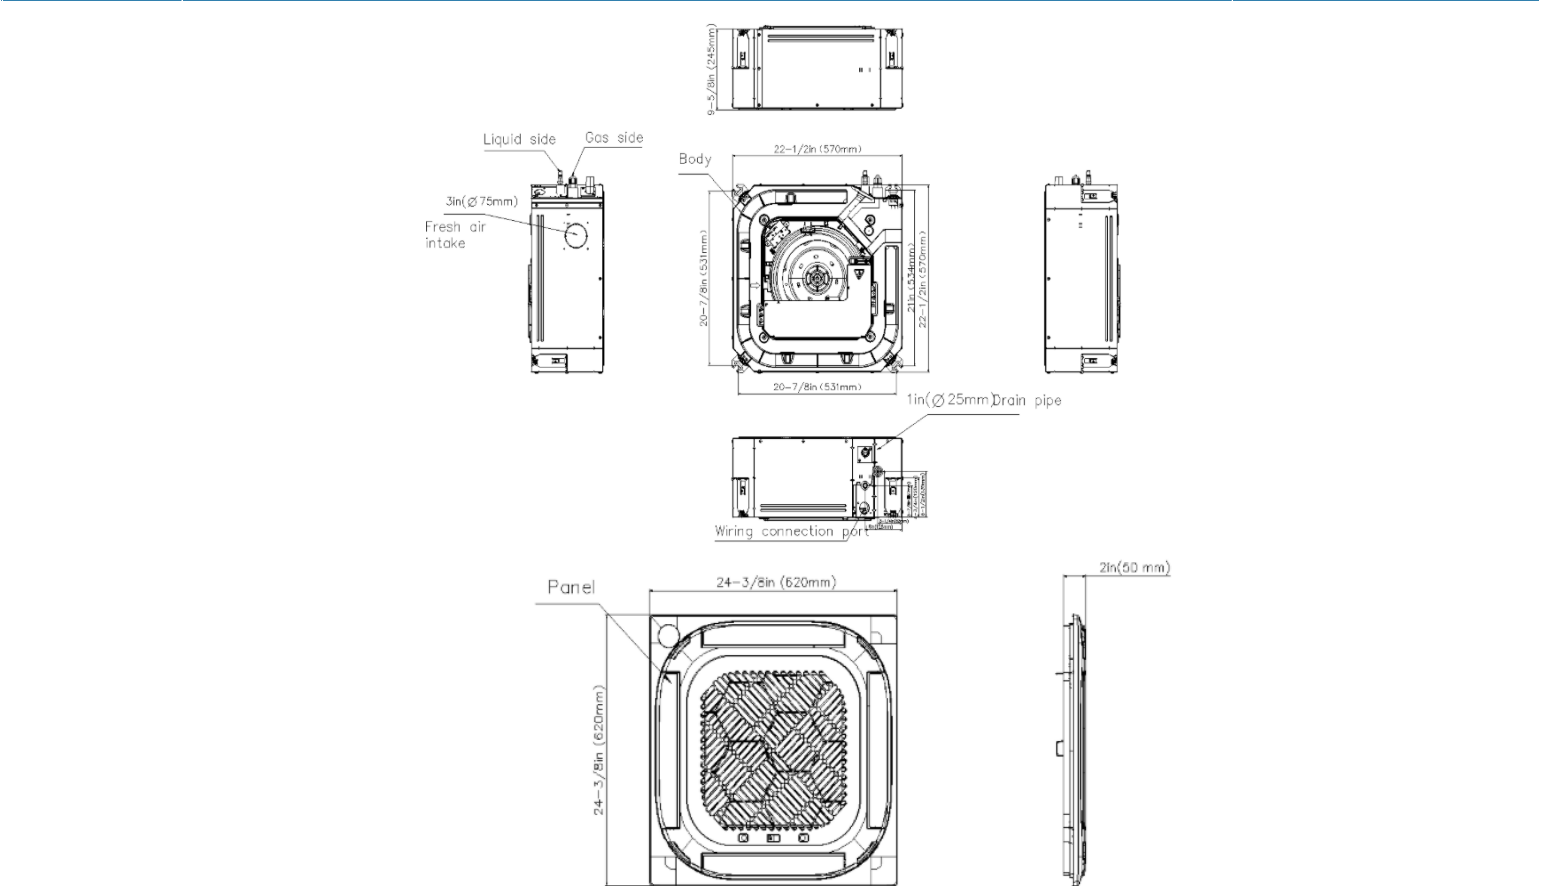

Distance from ceiling relative to height of indoor unit

Model	Length of A	Length of H	Length of B
9K/12K/18K	9.6in (245mm)	>10.8in (275mm)	23.6in (600mm)
24K	8.03in (205mm)	9.06in (230mm)	35.4in (900mm)

Features	
----------	--

- 360° air flow
- Remote on-off and alarm ports
- Refrigerant leakage detection sensor
- Humidity sensor
- Built-in pump
- Fan speed stages: 1~100%
- Wireless remote



Submittal Data Sheet

Series Name: Olympus Cassette
Model Number: CASSETTE24HP-230C-0

High Wall Heat Pump System


Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:




* Refer to AHRI for Certificates

INDOOR SPECIFICATION		
Indoor Air Flow (Turbo/H/M/L/Si)	CFM	765.2/706.3/635.7/547.4/547.4
Indoor Noise Level (Turbo/H/M/L/Si)	dBA	48.5/45/42.5/33.5/33.5
Dimension (WxDxH)	inch	32.68 x 32.68 x 8.07
	mm	830 x 830 x 205
Package (WxDxH)	inch	
	mm	
Net/Gross Weight	lbs	47.18/59.08
	kg	21.4/26.8
ELECTRICAL		
Power Supply	V, Hz, Ph	208 / 230V, 60Hz, 1Ph
Indoor Fan Motor RLA	A	1
Indoor Fan Motor	W	45

Indoor Unit Dimension

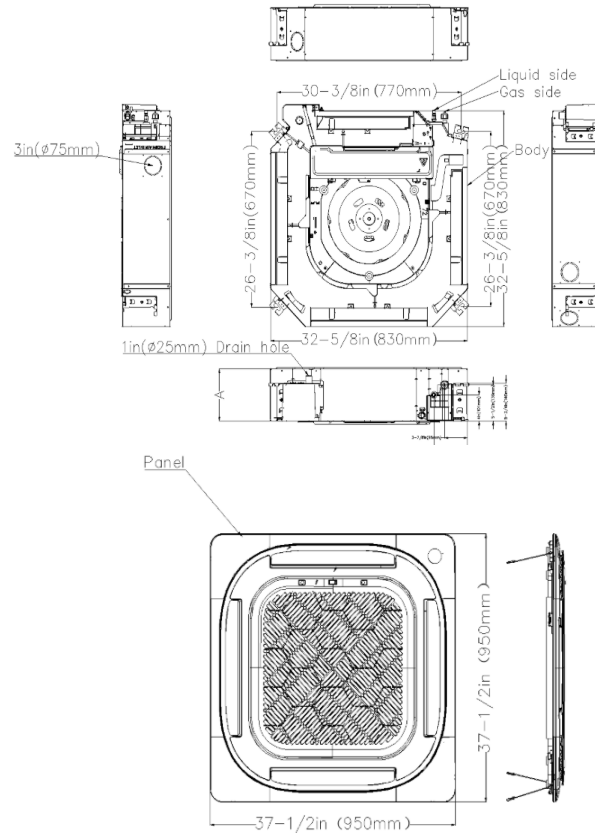

Installation Instruction

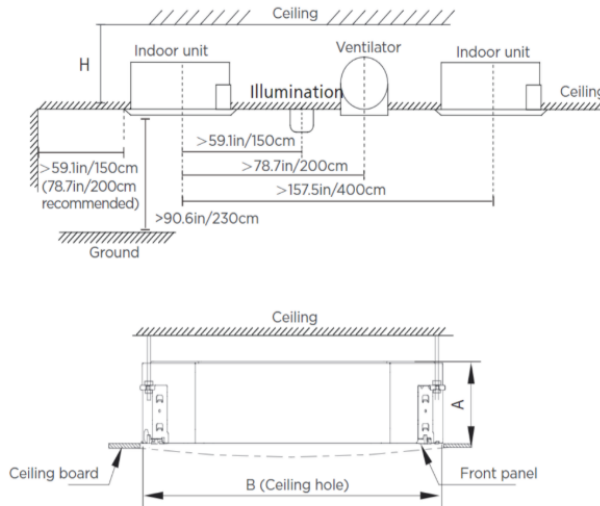

Distance from ceiling relative to height of indoor unit

Model	Length of A	Length of H	Length of B
9K/12K/18K	9.6in (245mm)	>10.8 in (275mm)	23.6in (600mm)
24K	8.03in (205mm)	9.06in (230mm)	35.4in (900mm)

Features

- 360° air flow
- Remote on-off and alarm ports
- Refrigerant leakage detection sensor
- Humidity sensor

- Humidity sensor
- Built-in pump
- Fan speed stages: 1~100%
- Wireless remote