

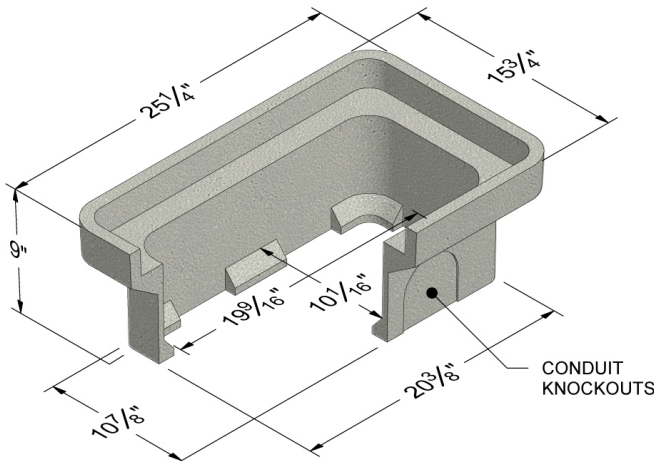



1324

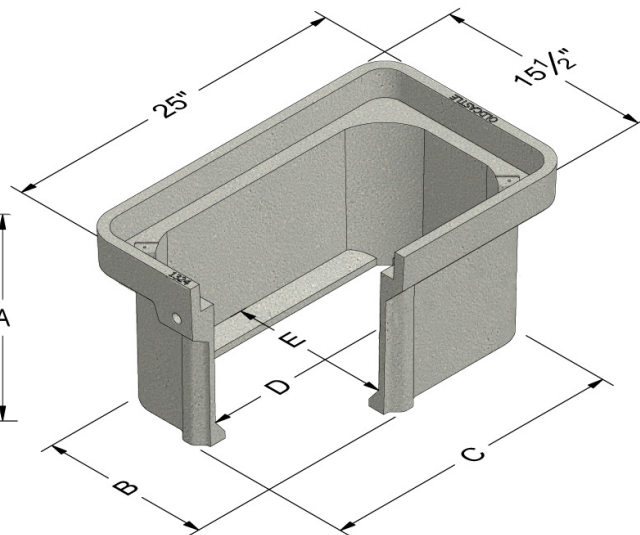

Bolt Down Detail

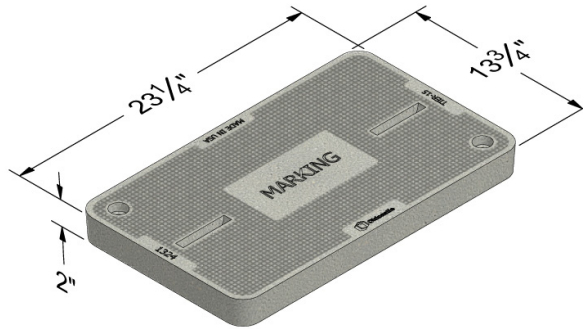

	A	B	C	D	E
1324-12	12	13-1/2	23	20-7/8	11-3/8
1324-18	18	13-3/8	22-7/8	20-5/8	11-1/8
1324-24	24	13-1/4	22-3/4	20-3/8	10-7/8

COVER:

Style: Flush Solid
Material: Polymer Concrete
Model: 13" x 24"
Weight: Tier 15: 38 lbs
Tier 22: 51 lbs

Std. Fasteners: 1/2-13 Stainless Steel Hex Head Bolt, Washer and Floating Nut

Options: Logos and Special Markings

Surface: Slip Resistant & Marked*

Coefficient of Friction: >0.6 ASTM 1028

Performance: ANSI/SCTE-77 Tier 15, WUC 3.6
ASTM C857 A-12
ANSI/SCTE-77 Tier 22, WUC 3.6,
ASTM C857 A-16

BODY:

Material: Polymer Concrete
Model: 13" x 24"
Weight: 12" Depth: 51 lbs
18" Depth: 69 lbs
24" Depth: 88 lbs

Wall Type: Straight

Performance: ANSI/SCTE-77 Tier 22, WUC 3.6,
ASTM C857 A-16

EXTENSION:

Material: Polymer Concrete
Model: 13" x 24"
Weight: 9" Depth: 33 lbs



Medium Duty:
Non-deliberate Traffic



Heavy Duty: Incidental,
Non-deliberate Traffic

For use in non-vehicular traffic situations only.

Actual load rating is determined by the box and cover combination.
Weights and dimensions may vary slightly

* Cover comes standard with permanent markings for manufacturer, load rating, model size and manufacturing location.

Contact your Oldcastle Enclosure Solutions Distribution Center for specific information and additional options.

1324

Options:
Available Polymer Covers:

Flush Solid (Standard)

Available Steel Covers:

One Piece

Fastener Options for Polymer Covers:

Penta Head Bolt
Oldcastle Enclosures Vandal Proof Bolt
Penta Coil Thread Bolt
Captive Bolt Retainer


Custom Options for Polymer Covers:

4" x 8" Plate with Custom Markings

Add on Options:

EMS Marker (E)
Mouseholes/Knockouts
Rack Mount (A)
Cable Racks/Cable Arms (B)
Unistrut (C)
Pulling Eye - 1,000 lb and 3,000 lb (D)
Ground Buss (F)
Dividers
Racking Provision
Lid Gaskets*
Solid Bottom
Bodies are Stackable (with tallest body on bottom)



*Lid Gaskets inhibit water flow into the box,
they do not make Enclosure fully waterproof.

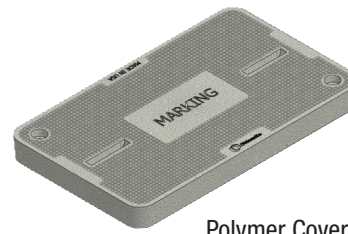

Polymer Cover



Steel Cover

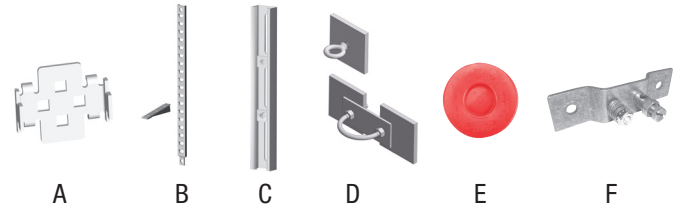

A

B

C

D

E

F

**Raw Material
Specifications:**

Standard Test Method	Properties of Raw Material	ASTM Designation	Typical Value
Compressive Strength of Polymer Concretes	Compressive Strength	C 579	> 11,000 psi
Flexural Properties of Plastic Materials	Flexural Strength	D 790	> 3,000 psi
Resistance of Plastics to Chemical Reagents	Chemical Resistance	D 543	Retain > 75% of original strength
Impact Resistance by Means of a Falling Weight	Impact Resistance	D 2444	> 70 ft-lb
Static Coefficient of Friction	Friction Coefficient	C 1028	> 0.6

ASTM Specifications shall be the current revision

Test Reports available on request

The Rural Utility Service (RUS) is a department of the US Department of Agriculture organized to facilitate rural developments. You will find Oldcastle Enclosure Solutions brand enclosures listed by the RUS. All Oldcastle Enclosure Solutions brand enclosures conform to the RUS "Tamper Resistant" fastener design for buried pedestals.

**Product Load
Rating:**

Medium Duty or Heavy Duty : Incidental, Non-deliberate Traffic

For use in non-vehicular traffic situations only.

Note:

Actual load rating is determined by the box and cover combination. Weights and dimensions may vary slightly

All information contained on this sheet is current at the time of printing.

Oldcastle Precast, Inc. reserves the right to discontinue or update product information without notice.

