


SPECIFICATION & FEATURES

MC/AC CABLE TO STUD CLIP 14-2 ~ 10-3 MC/AC

DESCRIPTION:

Orbit Industries' MC/AC cable to stud clip can be easily installed to flanges with thickness up to 1/8" by using the legs, or be screwed on concrete, block or wood and metal studs by using the mounting holes. The clip is used to position MC/ AC cables as required by NEC® Article 300.4(d) and CEC Rule 12-618. The clip can be snapped to make two clips for single cable runs.

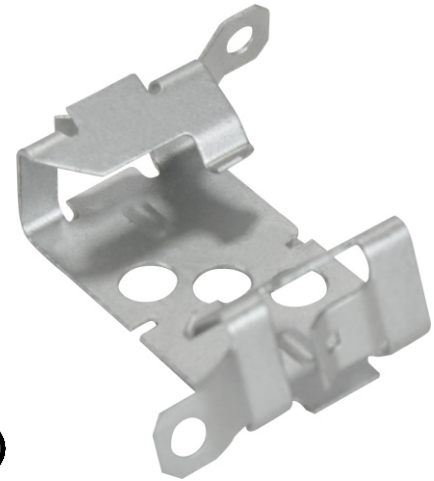

CERTIFICATION:

UL file E328572, conforms to UL 2239.

FEATURES:

- Spring Steel
- No tools needed for installation
- Holes in clip allow it to be screwed to wood stud, concrete or block
- Stabilizer leg provides "wobble-free" support
- Compliant with NEC® Article 300.4(d), allowing cable to be positioned a minimum of 1-1/4" from face of stud
- Compliant with CEC Rule 12-618 for support of MC/AC cable
- Can be snapped in half making one clip to two

CONFIGURATION DATA:

Part No.	Flange Thickness	Stud Clip Size	Std. Pkg.
FMAC2	1/8" MAX	14-2 ~ 10-3	100

