WORKSTATION


OR-KS6


OR-KSRJ25

KEYSTONE JACKS

TechChoice keystone jacks and modules feature an easy-to-follow universal wiring label and support standard termination using a 110-impact tool. The keystone footprint allows for the greatest flexibility in installation scheduling because its rear insertion into the faceplate allows the technician to complete the termination before, during and after the construction process.

PART NO. **Single Pack**	PART NO. **Pack of 25**	DESCRIPTION
OR-KS6A	OR-KS6	Category 6, 8-position, 180º exit, T568A/B wiring, icon compatible
OR-KS5EA	OR-KS5E	Category 5e, 8-position, 180º exit, T568A/B wiring, icon compatible
OR-KSRJ25A	OR-KSRJ25	RJ25, 6 position jack, USOC wiring, icon compatible
	OR-KSICON	TechChoice keystone icon compatible 2 sided voice/data

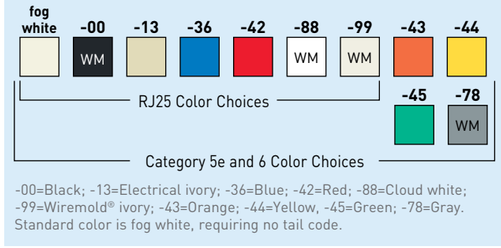

-00=Black; -13=Electrical ivory; -36=Blue; -42=Red; -88=Cloud white; -99=Wiremold® ivory; -43=Orange; -44=Yellow, -45=Green; -78=Gray. Standard color is fog white, requiring no tail code.


OR-KSST


OR-KSSC

FIBER KEYSTONE MODULES

PART NO.	DESCRIPTION
OR-KSST	1-ST simplex multimode, phosphor-bronze alignment sleeves, 180º exit. Fog white. Sold with dust cover
OR-KSSC	1-SC simplex multimode, phosphor-bronze alignment sleeves, 180º exit. Fog white. Sold with dust cover
OR-KSLC	1-LC (2 fibers) multimode, phosphor-bronze alignment sleeves, 180º exit. Fog white. Sold with dust cover

NOTE: For Wiremold Ivory, add tail code of -99 to end of part number (example OR-KSST-99) Sold individually.


OR-KSFCNR


OR-KSFCN


OR-KSRCAR


OR-KSSV


OR-KSBNC


OR-KSHDMI


OR-KSUSBAA


OR-KSUSBAB


OR-KS35STST

MULTIMEDIA KEYSTONE MODULES

PART NO.	DESCRIPTION
OR-KSFCNR	F-connector, Recessed, F/F, 75 ohm
OR-KSFCN*	F-connector, F/F, 75 ohm
OR-KSRCAR	RCA (red insulator), 110 termination
OR-KSRCAB	RCA (black insulator), 110 termination
OR-KSRCAY	RCA (yellow insulator), 110 termination
OR-KSRCAG*	RCA (green insulator), 110 termination
OR-KSRCABL*	RCA (blue insulator), 110 termination
OR-KSRCAW*	RCA (white insulator), 110 termination
OR-KSBP	Binding posts, pair of speaker terminals (one red, one black)
OR-KSSV	S-Video, 110 termination
OR-KSSVIDC	S-Video, F/F
OR-KSBNC	BNC connector, 50 ohm, F/F
OR-KSBNC75	BNC Connector, 75 ohm, F/F
OR-KSHDMI	HDMI, F/F
OR-KSUSBAA	USB 2.0, Type A to A, F/F
OR-KSUSBAB	USB 2.0, Type A to B, F/F
OR-KS35STST	3.5mm, audio, screw termination
OR-KS35ST*	3.5mm audio jack, F/F
OR-KSB10*	Blank, package of ten

NOTE: Standard color is fog white. Add -99 for Wiremold ivory.
*Also available in -88 cloud white and -13 electrical ivory.
For other colors, contact sales.



Designing a pathway system for multi-media needs

Legrand's Wiremold® pathway systems for infloor, perimeter, open space and vertical applications take into consideration and provide the proper space, capacity and bend radius for mixed A/V, data communications and electrical applications. All Wiremold pathways are designed to seamlessly integrate the complete line of TechChoice connectivity for audio, video and data, allowing for an extensive offering of connections to be brought anywhere they are needed.