

PLASTI-BOND REDH₂OT KNOCKOUT HUBS

Print This Page

KNOCKOUT HUBS

Return To Index





PRST2



PRSTG2

Knockout Hubs Configurations

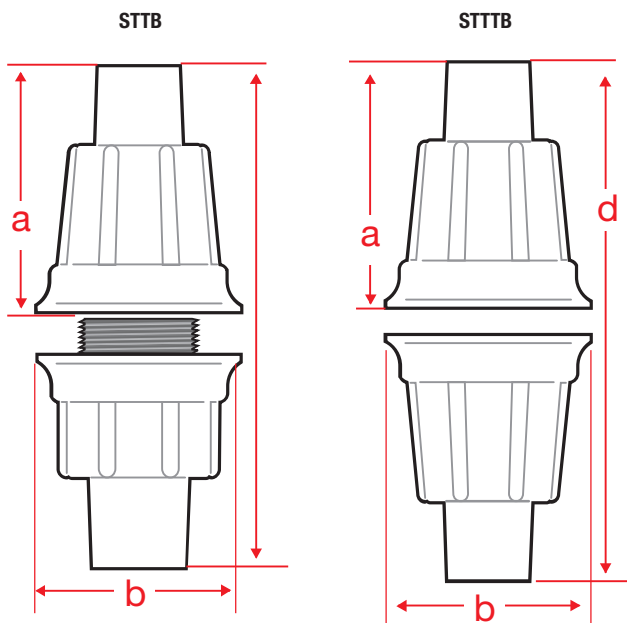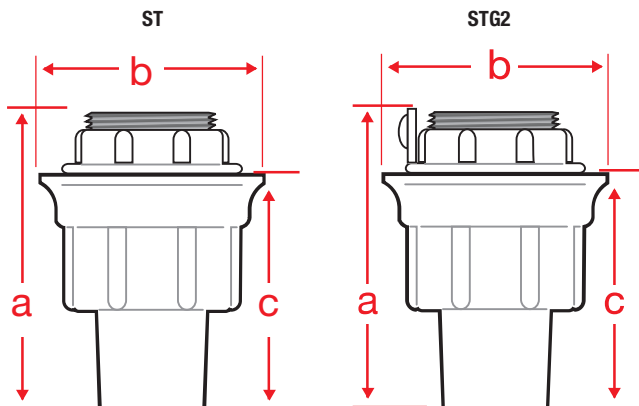

Knockout Hubs Specifications

PLASTI-BOND REDH₂OT ST style knockout hubs are used to terminate conduit runs through the wall of a sheet metal electrical enclosure. They are available with or without grounding lug. STTB style hubs are "Through-Bulkhead" fittings used to pass conduit runs through firewalls or bulkheads up to 1/8" thick. STTB style hubs perform the same function for unlimited wall thicknesses, (furnished without nipples).

APPLICATION

FEATURES

COMPLIANCES

- 40 mil gray PVC exterior coating
- 2 mil red urethane interior coating
- ST and STTB available in 12 trade sizes from 1/2" through 6"
- STTB in 6 trade sizes from 1/2" through 2".
- Sealing sleeves on conduit side of hub
- Molded PVC gasket seals flush with enclosure wall.
- O-ring gasket provides additional seal

- UL
- CSA

NOTE:

- All Screw-tight Hubs are listed for NEMA type enclosures 2, 3, 3R, 4, 4x, 11 and 12
- Grounding and Bonding Hubs are listed for NEMA Enclosures 2, 3, 3R, 4 and 12

APPROVAL STAMP

(See online product submittal guide at www.plastibond.com)