
techoLED®
BROOKLYN • NY

BX-4-R SERIES

Rev. Date: 11/05/2026

Project:	Type:
	Comments:

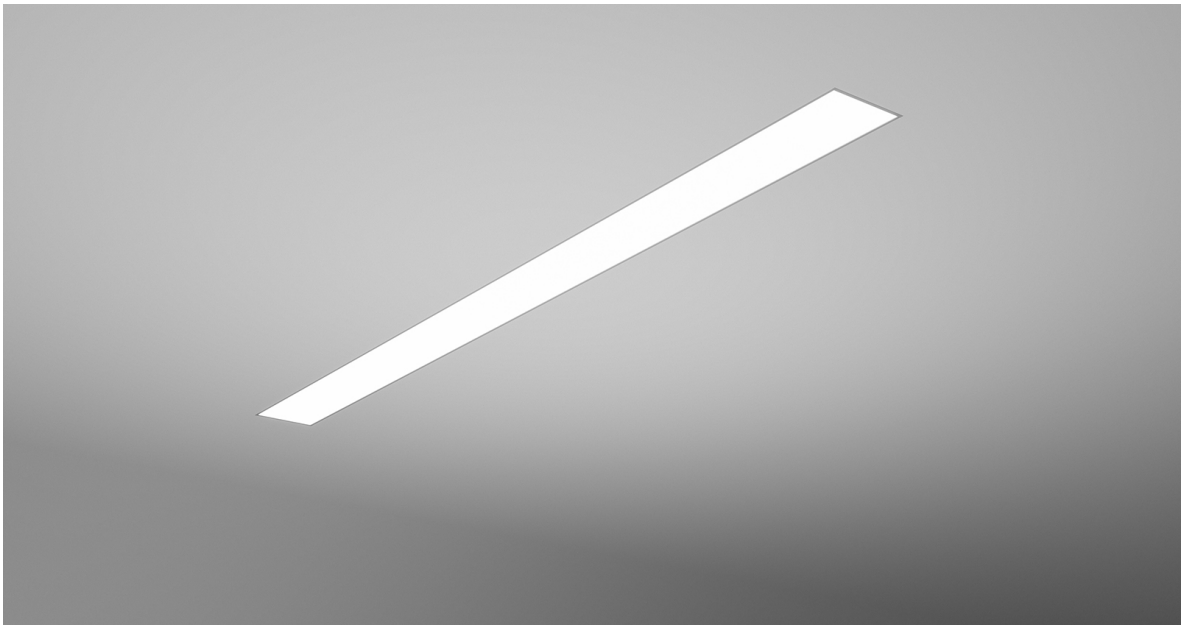

Highlights

The TechoLED BX series features specification-grade linear LED fixtures made from high-grade aluminum extrusions. Available in standard sizes from 2 to 8 feet, as well as custom lengths, recessed installation in variety of ceiling and materials. With virtually limitless options for creating patterns and shapes, the BX series provides a versatile, cost-effective, and modern lighting solution.


LED: Samsung LED chips, 2700-5000K, tunable white and RGB/RGBW available, 90CRI, 50,000 hour rated lifespan. Custom lumen packages available.

Optical: Direct illumination, multiple beam angles available (110° beam angle on solid lens), UGR<19


Construction: Damp location listed, high grade aluminum extrusion, die cast end caps, PMMA diffuser, powder coat finish. X, T, L lit corners, wall to ceiling transitions, for smooth seamless patterns.

5-year limited warranty

Cross Section



Installation



Reccessed
(R)

techoLED®
BROOKLYN • NY

BX-4-R SERIES

Rev. Date: 11/05/2026

Project:	Type:
	Comments:

Configuration Example

Model #	Distribution	Length	Lumen Output	Color Temp.	Voltage	Color
TECHOLED-BX-4-R-D-4-LO-27-U-W	Direct	4'	Low	2700K	110-270V	White

Ordering Guide:

Select one option from each group below. For a custom preference please contact sales@techoled.com

1-FIXTURE ID		2-DISTRIBUTION		3-LENGTH		4-LUMEN OUTPUT	
BX-4-R	BX-4-R	D	Direct	2	2´	LO	Low
		DWW	Direct, Wall Wash	4	4´	ME	Medium
		BW	Bat Wing	6	6´	HI	High
				8	8´		
				C	Custom		

5-COLOR TEMP.		6-VOLTAGE		7-FINISH		8-MOUNTING	
27	2700K	U	110-277V	S	Silver	RP	Recessed (mud-in)
30	3000K	HV	347V	W	White	TG	T Grid Universal
35	3500K			B	Black		
40	4000K			C	Custom (RAL#)		
50	5000K						
DT	Lutron T-series						
RGB	RGB						
RGBW	RGBW						
D	Tunable White						

9-DRIVER OPTIONS		10-OPTIONS		11-OPTIONS (CONT.)	
DM	0-10V Dimming	RF-D	Remote Tunable (RF only)	EM	EM Battery (remote)
2C	2 Channel	RF-R	Remote RGB/W (RF only)	X	None
DM1%	1% Dimming	M	Motion Sensor (remote)		
LT1	LDE1 Lutron 1%	BM	BubblyNet BT Mesh		
DA	Dali	CS	Casambi		
DMX	DMX	AWNR	Lutron Athena Node		
TR	Triac Dimming	AWNS	Lutron Athena Node sensor		
RF	RF Wireless	NL-ES7	nLight - Wired		
X	None	NL-AIR	nLight - AIR		
		NL-M	nLight - Module only		
		X	None		

techoLED®
BROOKLYN • NY

BX-4-R SERIES

Rev. Date: 11/05/2026

Project:	Type:
	Comments:

Lumen Output Details

Model #	Size	Output	Color Temp.	Wattage	Lumen Output
TECHOLED-BX-4-R-D-2-LO-30	2'	Low	3000K	12W	1200Lm
TECHOLED-BX-4-R-D-2-ME-30	2'	Medium	3000K	18W	1800Lm
TECHOLED-BX-4-R-D-2-HI-30	2'	High	3000K	23W	2300Lm
TECHOLED-BX-4-R-D-4-LO-30	4'	Low	3000K	23W	2300Lm
TECHOLED-BX-4-R-D-4-ME-30	4'	Medium	3000K	36W	3600Lm
TECHOLED-BX-4-R-D-4-HI-30	4'	High	3000K	46W	4600Lm
TECHOLED-BX-4-R-D-6-LO-30	6'	Low	3000K	35W	3500Lm
TECHOLED-BX-4-R-D-6-ME-30	6'	Medium	3000K	54W	5400Lm
TECHOLED-BX-4-R-D-6-HI-30	6'	High	3000K	69W	6900Lm
TECHOLED-BX-4-R-D-8-LO-30	8'	Low	3000K	46W	4600Lm
TECHOLED-BX-4-R-D-8-ME-30	8'	Medium	3000K	72W	7200Lm
TECHOLED-BX-4-R-D-8-HI-30	8'	High	3000K	92W	9200Lm

Performance above applies to 90 CRI, 3000K. Calculate 96% for 2700K, 104% for 3500K and 109% for 4000K

Performance

		Direct	
Output	Lumens / W	W / ft	Lumens / ft
Low	100	5.8	580
Medium	100	9.0	900
High	100	11.5	1150

Project:	Type:
	Comments:

Driver Option Details


Code	Description
LT1	**LDE1** - Lutron Hi-lume 1% EcoSystem, Soft-on, Fade-to Black Dimming
DA	**DALI**
DMX	**DMX** - Decoder provided by TechoLED, controller by others

Controls Details

Code	Description
RF-D	**RF Wireless** remote controller for tunable white. **Default for tunable white.**
RF-R	**RF Wireless** remote controller for RGB & RGBW. **Default for RGB & RGBW.**
M	**Motion Sensor** - remote, for integral sensor consult factory
BM	**Bluetooth Mesh** Smart Wireless Control by BubblyNet
CS	**Bluetooth Mesh** Smart Wireless Control by Casambi
AWNR	**Lutron Athena** wireless node
AWNS	**Lutron Athena** wireless node with sensor
NL-ES7	**Acuity nLight** - Wired nES7 sensor
NL-AIR	**Acuity nLight** - AIR wireless rES7 sensor
NL-M	**Acuity nLight** - ready, sensor by others

Project:	Type:
	Comments:


Dimension and Mounting - Direct Distribution (D)

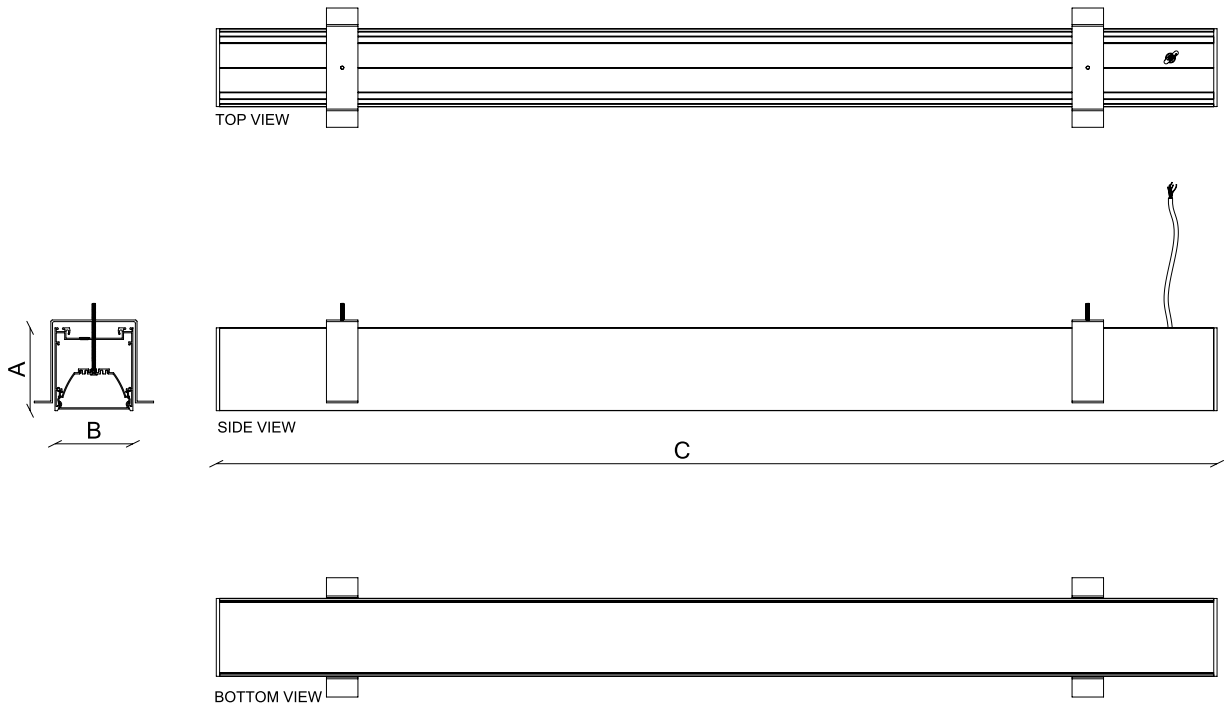


FIXTURE ID	A	B	C
BX-4-R-D-2	3.9”	3.7”	24.2"
BX-4-R-D-4	3.9”	3.7”	48"
BX-4-R-D-6	3.9”	3.7”	71.8"
BX-4-R-D-8	3.9”	3.7”	95.5"


Project:	Type:
	Comments:


Recessed - T Grid 9/16" (universal bracket)



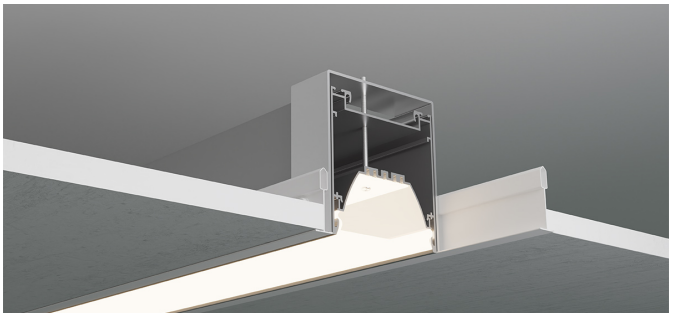



Recessed - T Grid 15/16" (universal bracket)



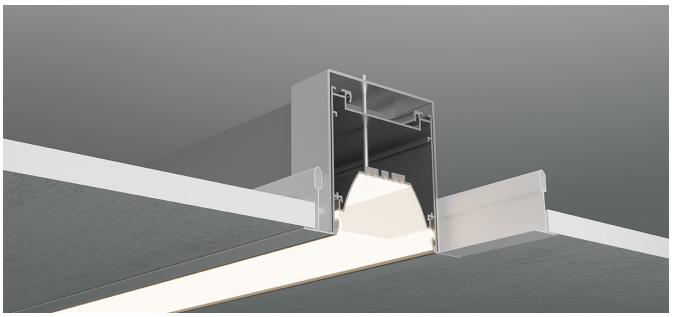



Recessed - Slot Grid (universal bracket)



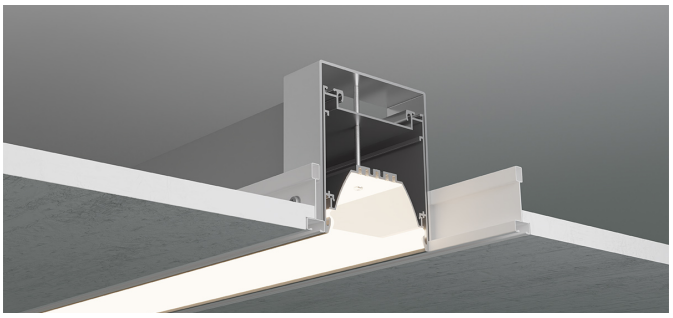


Recessed - Tegular Grid 9/16" (universal bracket)




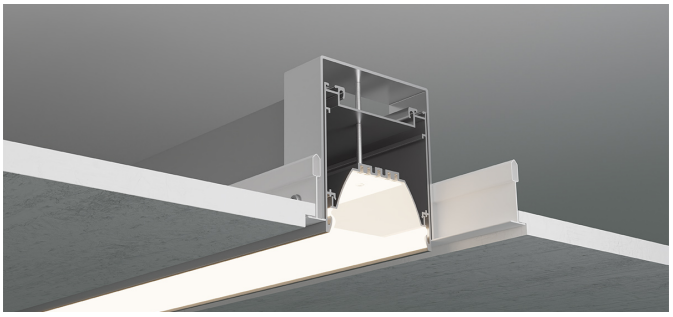

Project:	Type:
	Comments:

Recessed - Tegular Grid 15/16" (universal bracket)




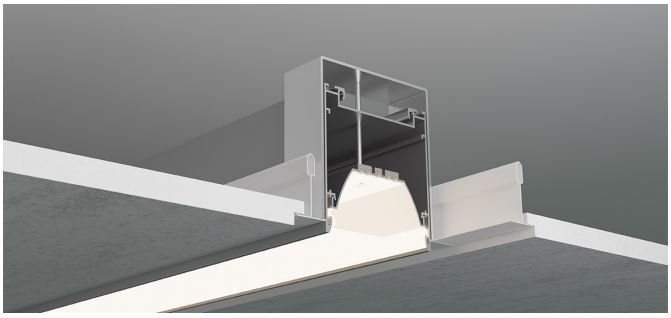



Project:	Type:
	Comments:


Dimension and Mounting - Direct Distribution (D)

Recessed - mud in

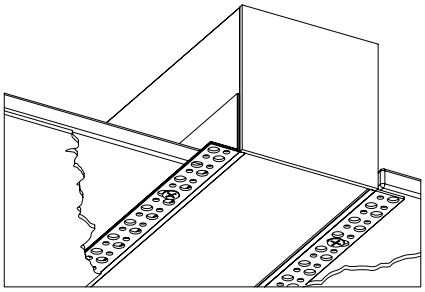

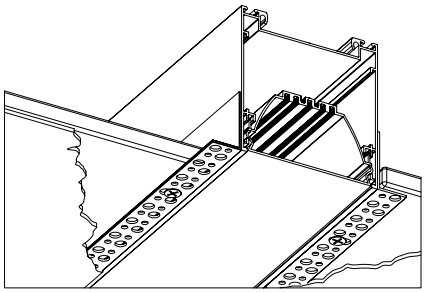


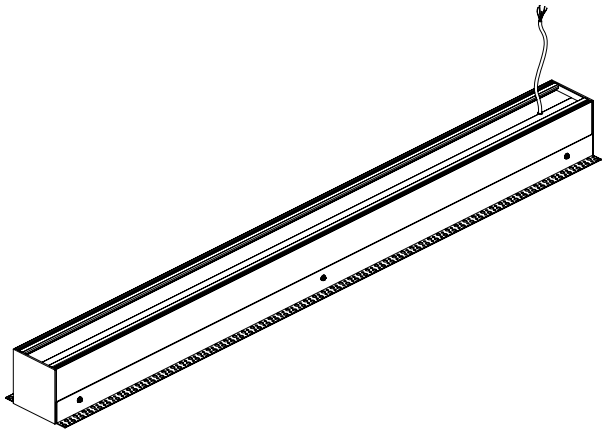

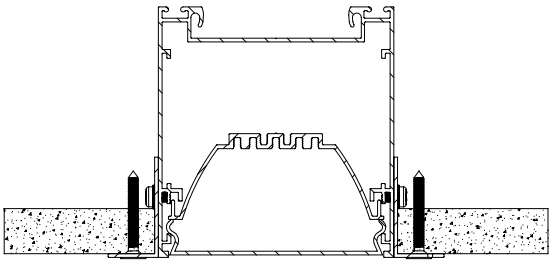


Project:	Type:
	Comments:


Photo Detail (recessed - mud in)

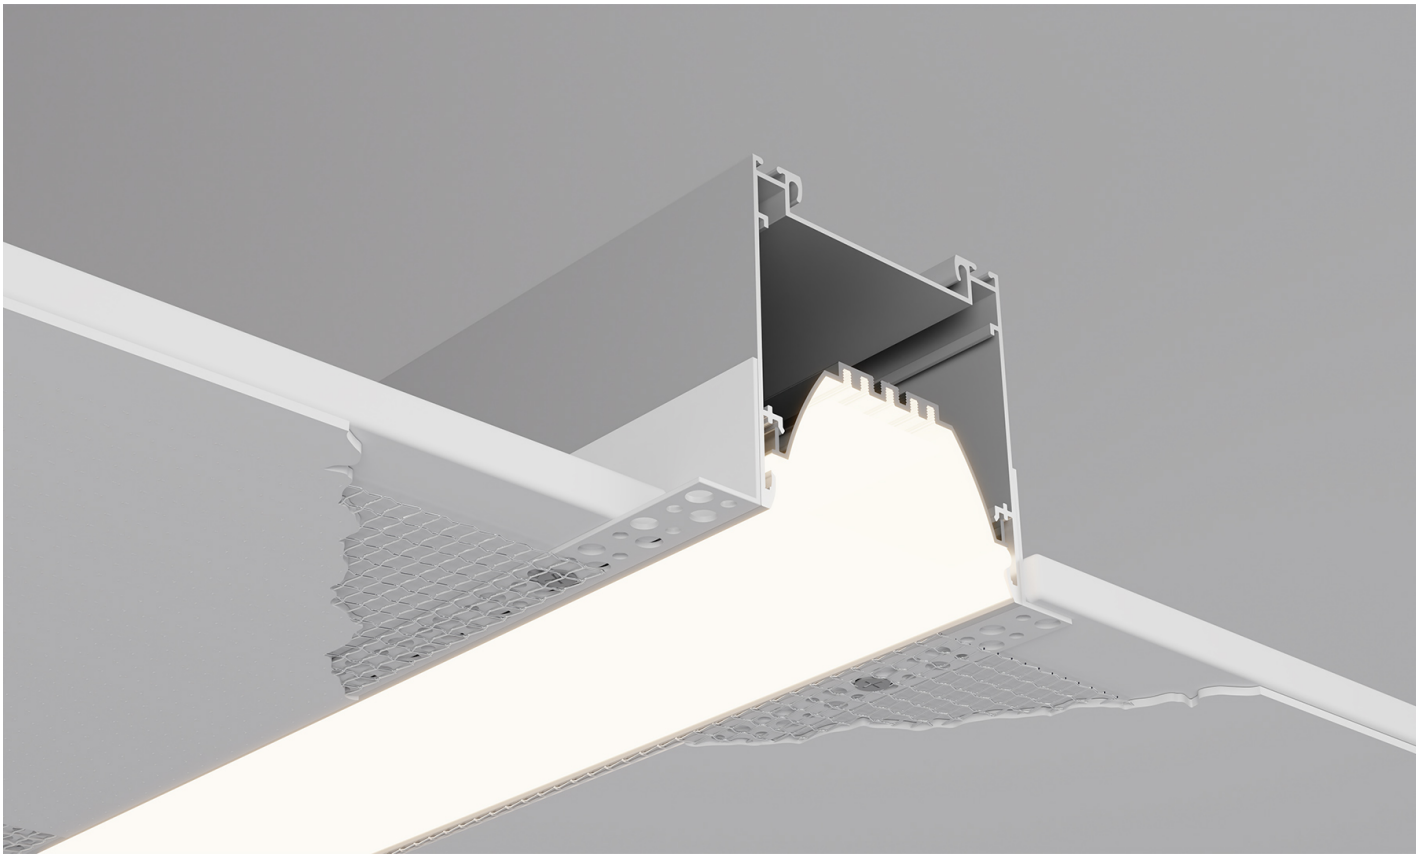

Project:	Type:
	Comments:

Connectors

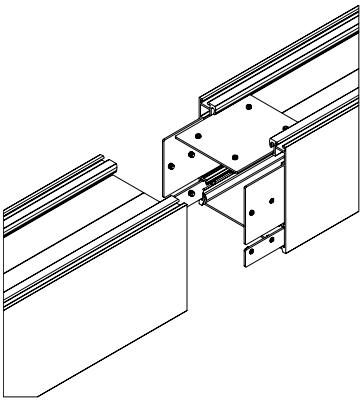

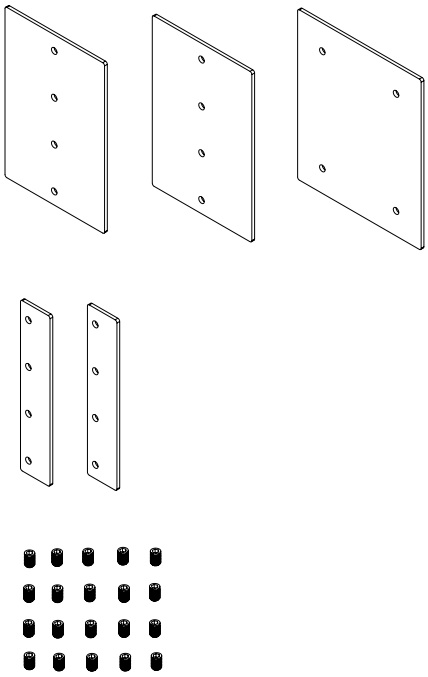


techoLED®
BROOKLYN • NY

BX-4-R SERIES


Rev. Date: 11/05/2026

Project:	Type:
	Comments:


Photometrics




TECHOLED-BX-4-R-D-2-LO-30




TECHOLED-BX-4-R-D-2-ME-30




TECHOLED-BX-4-R-D-2-HI-30




TECHOLED-BX-4-R-D-4-LO-30




TECHOLED-BX-4-R-D-4-ME-30




TECHOLED-BX-4-R-D-4-HI-30




TECHOLED-BX-4-R-D-6-LO-30




TECHOLED-BX-4-R-D-6-ME-30




TECHOLED-BX-4-R-D-6-HI-30



TECHOLED-BX-4-R-D-8-LO-30



TECHOLED-BX-4-R-D-8-ME-30




TECHOLED-BX-4-R-D-8-HI-30


Project:	Type:
	Comments:

Patterns Option Examples


Custom pattern

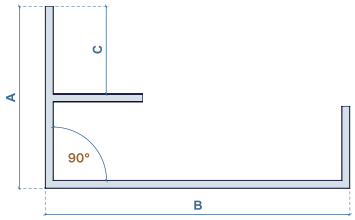


Rectangle

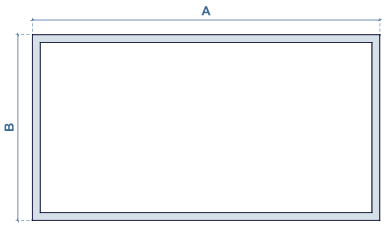


Hexagon




Triangle



Zig-zag / Hex

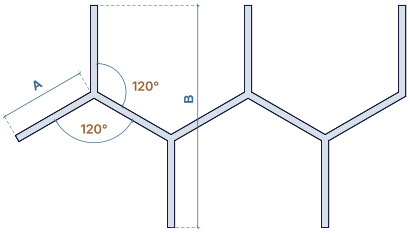

One arm angle



techoLED®
BROOKLYN • NY

BX-4-R SERIES

Rev. Date: 11/05/2026

Project:	Type:
	Comments:

Finish Details (powder coat finish)

Standard Colors

W – White


S – Silver


B – Black

Custom Colors


RAL 1003


RAL 2004


RAL 3000


RAL 4001


RAL 5002


RAL 6000


RAL 6038


RAL 7001


RAL 1036


RAL 8029

Any RAL color available, please refer to ralcolorchart.com


Custom Wooden Colors


American Walnut


Cherry


Maple



Light Oak


Palisander Santos


Project:	Type:
	Comments:

Color Temperature


Color Temperature




2700K




3000K



3500K




4000K




5000K

Tunable White



Dim To Warm



Tunable White