

BOLLARD LIGHT

TK-YS™ Series

Description

Tektron's TK-YS features a corrosion-resistant aluminum profile with a No-Rinse surface treatment and double powder coating, ensuring durability and reduced dirt accumulation. The upper cover and base plate are made from corrosion-resistant cast aluminum with the same protective treatments. It is equipped with high-power LEDs on a metal-core PCB and offers two cable entries for through-wiring.

Applications

Ideal for outdoor applications such as pathways, gardens, parks, and commercial landscapes.

Quick Ship

TK-YS-12W-3CCT

TK-YS-24W-3CCT



Specification Features

Controls / Dimming

5%-100% dimming capability. It supports advanced controls with optional dimming capabilities, allowing for precise brightness adjustments to suit different environments.

Warranty

5 Years Limited Warranty.

For more information visit us at,

www.technoledlights.com/warrantyinfo

Certification

It complies with IP65 protection, CE Rated.

Installation / Mounting

The installation process is straight forward and offers a range of mounting possibilities. Air-tight application.

No housing required

Ordering Information


Example: TK-YS-12W-3CCT-BL

TK	YS	12W	3CCT	BL	Options
Brand	Series	Watts	Color Temp (Color temp Selectable)	Color	Option
TK - TekTron	YS - Bollard light	12W - 12 Watts 24W - 24 Watts	2700K 3000K 4000K	BL - Black BR - Bronze	Type 1 Type 2 Type 3 Type 4 Type 5

Specification Features

Input Voltage	220-240V/12-24V/120-277V
Color Temperature (CCT)	3CCT (2700K,3000K,4000K)
Luminous efficacy (Lm/W)	38.2/34.1 Lm/W
Color Rendering Index (CRI)	80+
Working Temperature	-40°C to 40°C
Life Span	50,000+ Hrs



Dimensions



Part Number	Height	Diameter
TK-YS-12W-3CCT	5.9 inch	31.5 inch
TK-YS-24W-3CCT	5.9 inch	39.3 inch

Photometric

INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS

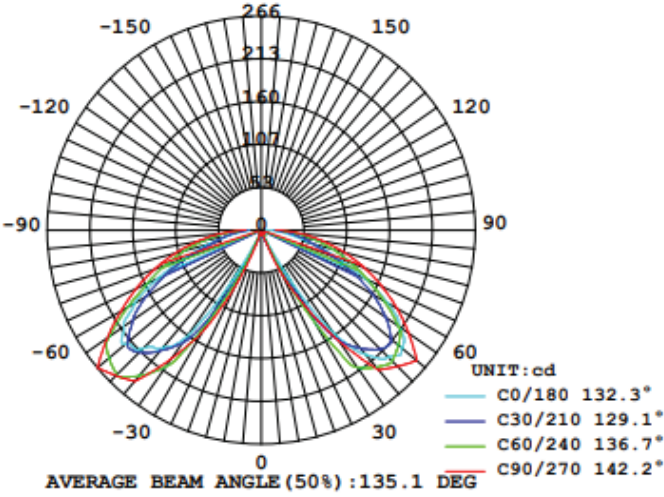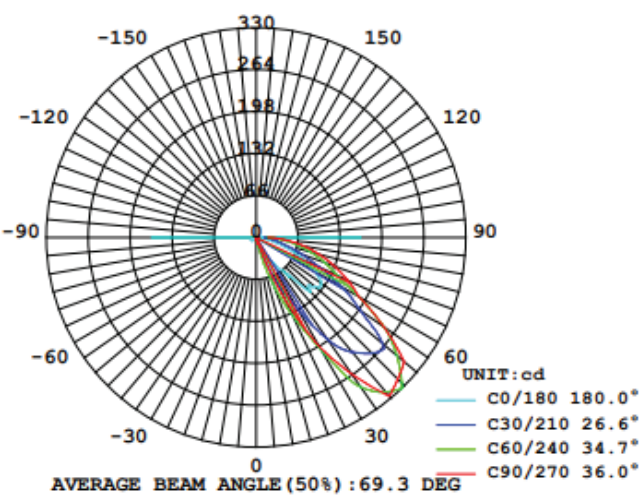

Different types

