

Catalog #:	
Project :	
Type :	Date:
Notes:	

Gen2 LED Architectural Linear Direct-Indirect Light

TK-LSUD2 Series

DESCRIPTION

Tektron LED Linear Light is a 2.75-inch wide H-shape extruded aluminum architectural linear direct/indirect luminaire designed for modular and seamless continuous runs. The fixture delivers soft, uniform illumination and supports individual units or extended linear configurations.

APPLICATIONS

These LED Architectural Linear Direct Light are suitable for office, bedroom, supermarket, pathways, storage units, stairwell.



QUICK SHIP :

TK-LSUD2-50W-4FT-30K/35K/40K-T-BK

TK-LSUD2-50W-4FT-30K/35K/40K-T-WH



Specification Features

Controls / Dimming

0–10V dimming (10–100%, dim-to-off).
Optional DALI dimming.
Bluetooth mesh and Microwave motion sensor with daylight harvesting.
Emergency battery backup: 8W for 90 minutes.

Certification

It complies with ETL Listed, DLC, FCC

Warranty

5 Years Limited Warranty. See warranty documentation for more information

Installation / Mounting

Supports suspended, surface, wall mount, and recessed mount installations. Multiple canopy sizes available for suspended mounting.

Ordering Information


Example: TK-LSUD2-50W-4FT-30K/35K/40K-T-BK

TK	LSUD2	50W	4FT	D	T	Options	HV	Mounting	Options
Brand	Product Name	Watts	Size	Dimmable	CCT	Finish	Voltage		
TK TekTron	LSUD2 GEN2 Linear Up & Down Light	50W - 50 Watts	4FT 4 Feet	D 0-10V E ELV T TRIAC DA DALI	30K/35K/40K 3000K/3500K/4000K (CCT Selectable)	BK Black WH White SA Satin (Aluminum)	HV 120-347V UV 120-277V	SP Suspended air craft cable WM Wall Mount SC Suspended Canopy and aircraft cable SM Surface Mount 6ft Cord Optional Finishes available	MS Motion Sensor BM Bluetooth Mesh EM Emergency Backup

Specification Features


Input Voltage	120-277V
CCT	3 CCT (Tunable)
Luminous efficacy	115Lm/W
CRI	>80
Wattage	50W
Lens	PC Frosted 120°
Operating Temp	-25 C°- 50 C°
Dimming	0-10V Dimming
Life Span	50,000 Hrs

Product Dimension

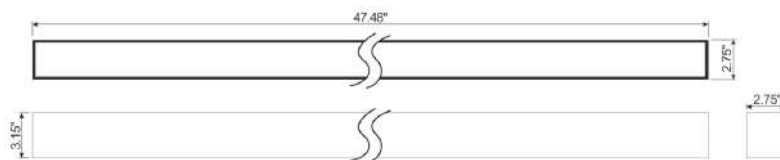


Part Number	L	W	H
TK -2LSD -XXW -4FT	47.48"	2.75"	3.15 "


Accessories



Power Cable

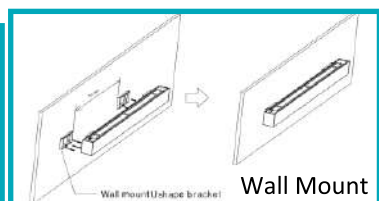


Wall Mount

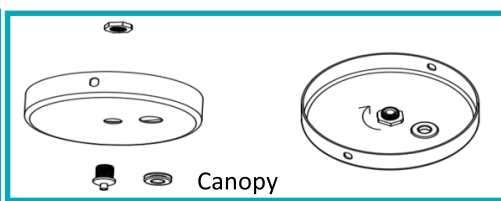

Canopy




Linkable

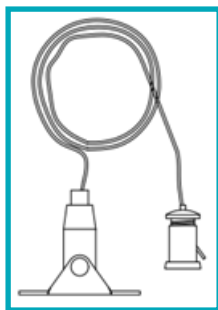

Aircraft Cable



Emergency Backup

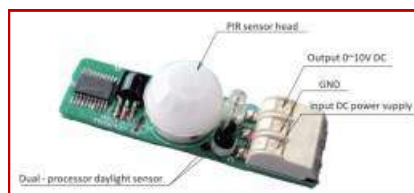

PIR Sensor



2.4G Wireless Control

Motion Sensor

