

GEN4LED Linear High Bay

TK-LHB4™ Series

Description

Tektron's Linear High Bay light is a green energy solution that cuts down 70% energy consumption compared to fluorescent tubes. It has a wide voltage range, high lumen efficiency, and a long lifespan with a professional design.

Applications


Ideal for commercial and residential lighting needs. Replaces Metal Halide & Fluorescent High Bays for energy efficiency.

Quick Ship

TK-LHB4-1.6FT-155W/185W/210W-50K

TK-LHB4-2.3FT-200W/250W/310W-50K

TK-LHB4-3FT-400W-50K

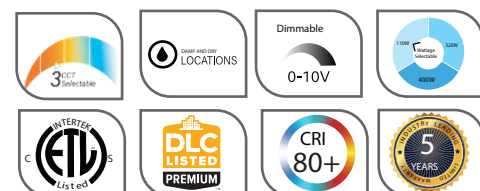

Specification Features

Controls / Dimming

0-10V dimming 10-100%, dim to off, Beam angle 120°, PIR and Motion Sensor optional

Warranty

5 Years Limited Warranty.

For more information visit us at,

www.technoledlights.com/warrantyinfo

Certification

It complies with ETL Listings, DLC Premium Damp and Dry Location Rated.

Installation / Mounting

The installation process is straightforward and offers a range of mounting possibilities. V-Hooks and Chains. Pendant and surface mount optional

Ordering Information


Example: TK-LHB4-1.3FT-100W/135W/165W-50K

TK	LHB4	1.3FT	100W/135W/165W	50K	Options	[BLANK]
Brand	Series	Length	Wattage	Color Temp	[BLANK]	Dimmable
TK - TekTron	LHB4 - Linear High Bay Gen5	1.3FT- 1.3Feet	1.3 Feet - { 100W - 100 Watts 135W - 135 Watts 165W - 165 Watts	40K - 4000K 50K - 5000K	MS - Motion Sensor EM - Emergency Driver HL - High Lumens Mounting Suspension 3/4"NPT Pendant mount	D - 0-10V Dimming Voltage UV - 100-277VAC (Universal Volatage) 50/60 Hz
		1.6FT- 1.6Feet	1.6 Feet - { 155W - 155 Watts 185W - 155 Watts 210W - 210 Watts			
		1.9FT- 1.9Feet	1.9 Feet - { 155W - 155 Watts 185W - 155 Watts 210W - 210 Watts			
		2.3FT- 2.3Feet	2.3 Feet - { 200W - 200 Watts 250W - 250 Watts 310W - 310Watts			
		3FT- 3Feet	3 Feet - 400W - 400Watts			

Specification Features


Input Voltage	100-277 VAC
Color Temperature (CCT)	4000K, 5000K
Luminous efficacy (Lm/W)	140 Lm/W
Color Rendering Index (CRI)	Ra>80
Dimmable	0-10V
Beam Angle	40°x100°. 120°
Operating Temperature	-20°C ~ 50°C
Life Span	50,000+ Hrs

Dimensions


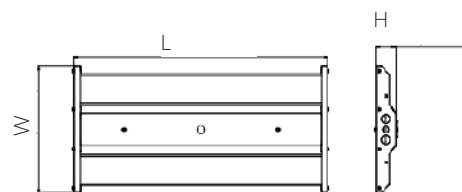


Part Number	L (Length)	W (Width)	H (Height)
TK-LHB4-XXW-1.3FT	15.60"	9.94"	1.91"
TK-LHB4-XXW-1.6FT	19.30"	9.94"	1.91"
TK-LHB4-XXW-1.9FT	22.83"	9.94"	1.91"
TK-LHB4-XXW-2.3FT	27.60"	9.94"	1.91"
TK-LHB4-XXW-3FT	36.02"	9.94"	1.91"

Optional Accessories



Photometrics

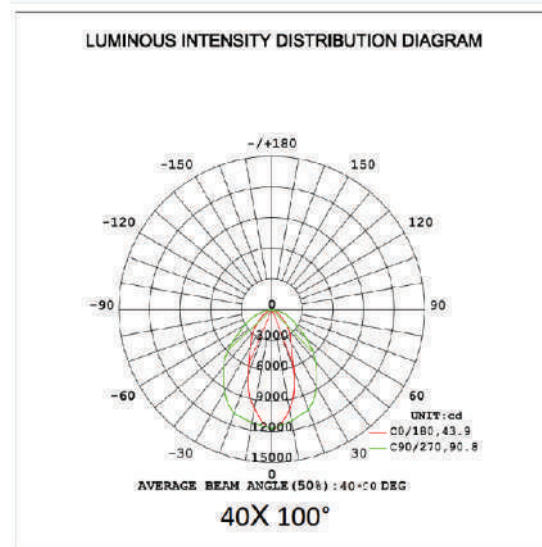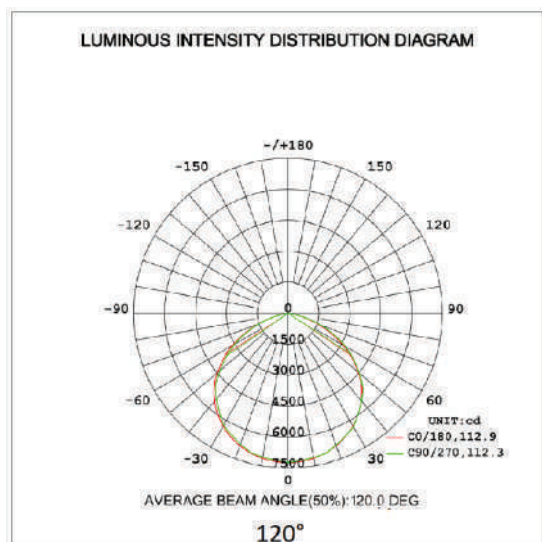

Application Images

