

LED RETROFIT DOWNLIGHT

TK-RDL2™ Series

Description

Tektron's TK-RDL2 is a 4-inch & 6-inch, retrofit downlight that offers a high-performance, energy-efficient and sleek lighting solution for residential applications. It can be easily installed in existing fixtures and is suitable for damp locations. It provides good light output and a streamlined design.


Applications

Ideal for replacing CFL, HID, or incandescent downlights to achieve higher energy savings and improved aesthetics.



Quick Ship

TK-RDL2-R4-9W-5CCT
TK-RDL2-R6-15W-5CCT

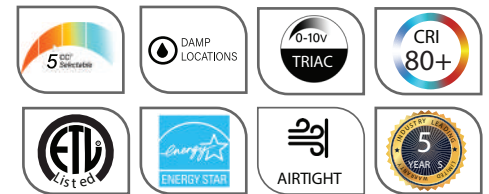

Specifications and Features

Controls / Dimming

5%-100% dimming capability. This fixture is compatible with industry standard TRIAC/ELV dimmers.

Warranty

5 Years Limited Warranty.
For more information visit us at,
www.technoledlights.com/warrantyinfo

Certifications

It complies with ETL Intertek Listed and Energy Star


Installation / Mounting

Designed for quick retrofit installation into existing recessed housings. The fixture installs easily using spring clips and an E26 base, requiring no additional junction box. Suitable for insulated ceilings and wet-location applications

Ordering Information

Example: TK-RDL2R4-9W-5CCT


TK	RDL2	R4	9W	5CCT	[BLANK]
Brand	Series	Diameter	Watts	Color Temp	Diffuser Type
TK - TekTron	RDL2 - Retrofit Downlight GEN2	R4 - 4 inch R6 - 6 inch	4 inch 9W - 9 Watt 6 inch 15 - 15 Watt	27K - 2700K 30K - 3000K 5CCT - 40K - 4000K 50K - 5000K 60K - 6000K 2700K - 6000K (single color temperature optional)	Polycarbonated Input Voltage 120V 60Hz

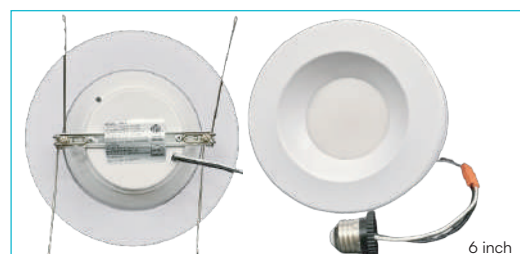

Specifications and Features

Input Voltage	120V
Color Temperature (CCT)	2700K/3000K/4000K/5000K/6000K
Color Rendering Index (CRI)	80+
LED Chip	SMD 2835
Operating Temperature	-40°C~40°C
Beam Angle	70°
Frequency	60 Hz
Life Span	50,000+ Hrs



Dimensions

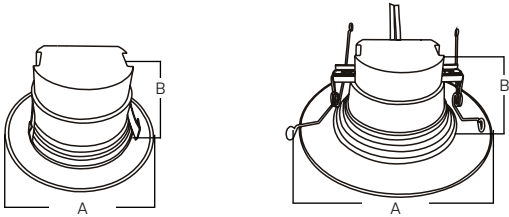

Part Number	A (Diameter)	B (Height)
TK-RDL2-R4-XX-5CCT	5.5 inches	2.95 inches
TK-RDL2-R6-XX-5CCT	7.40 inches	3.2 inches

Part Number	Size	Watt	Lumens
TK-RDL2-R4-XX-5CCT	4 inches	9W	800 Lm
TK-RDL2-R6-XX-5CCT	6 inches	15W	1,200 Lm

Specifications and Features

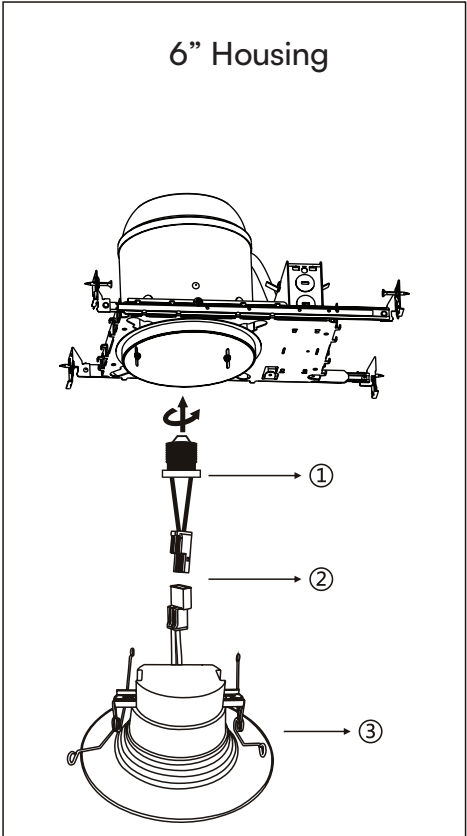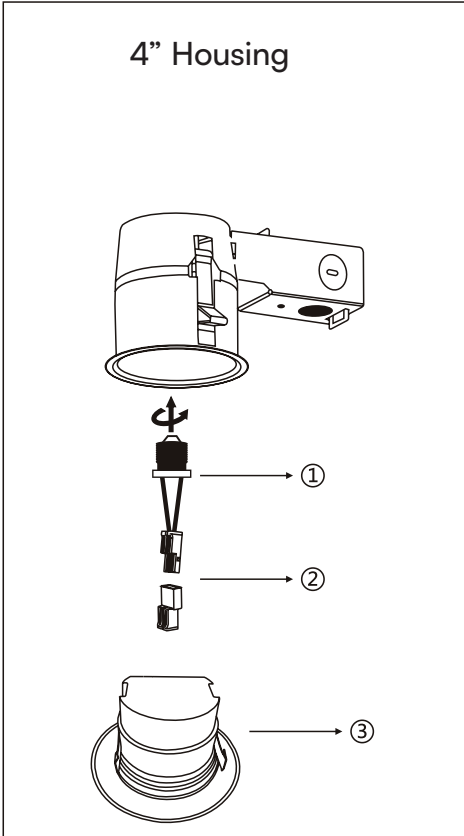

INSTALLATION INSTRUCTION

STEP 1 . Screw E26 adapter into existing socket.
STEP 2. Insert orange LED connector from module to recessed fixture connector.
STEP 3. Carefully route wires into fixture and push module up flush to ceiling surface.

