

LED COMMERCIAL DOWNLIGHT

TK-PUSH2™ Series

Description

Tektron's TK-PUSH2 modular LED recessed downlight is a versatile, high-performance lighting solution designed for new construction and remodeling applications. Featuring adjustable lumen output, selectable color temperature, variable beam angles, and smooth 0—10V dimming, it delivers flexible lighting control, high efficiency, and long-lasting performance for commercial interiors.

Applications


Ideal for commercial lightings and remodeling or new construction projects.

Quick Ship

TK-PUSH2-6-30W/30W-5CCT-WH

TK-PUSH2-8-40W-40K-5CCT-WH

TK-PUSH2-10-50W-40K-5CCT-WH

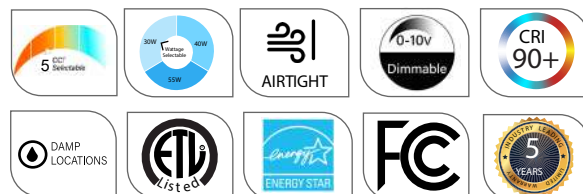

Specification Features

Controls / Dimming

5%-100% dimming capability. This fixture is compatible with industry standard TRIAC/ELV dimmers

Warranty

5 Years Limited Warranty.

For more information visit us at,

www.technoledlights.com/warrantyinfo

Certification

It complies with ETL Listings, Energy Star, FCC Certified, and Damp Location Rated.

Installation / Mounting

The installation process is straight forward and offers a range of mounting possibilities. The slim profile allows to be mounted under joists or duct work, including two spring loaded clips to attach some ceiling material

Ordering Information

Example: TK-PUSH2-6-30W-5CCT-WH-D

TK	PUSH2	6	30W	5CCT	Options	(ORDER SEPARATELY)												
Brand	Series	Diameter	Watts (wattage Selectable)	Color Temp (Color temp Selectable)	Voltage	Trims												
TK - TekTron	PUSH2	6 - 6 inch 8 - 8 inch 10 - 10 inch	30W - 30 Watts 40W - 40 Watts 55W - 55 Watts 30W/40W/50W (wattage selectable optional)	2700K 3000K 5CCT - 4000K 5000K 6000K (3 CCT temperature optional) 2700K - 6000K (single color temperature optional)	HV- 100-347V Dimming D - 0-10V Dimming Body Color BK-Black WH-White BN-Brush Nickel	<table><tr><th>Product ID</th><th colspan="2">Aperture/Shape/Function</th></tr><tr><td>TK-PUSH2-R06</td><td>R06</td><td>6" Round Downlight</td></tr><tr><td>TK-PUSH2-R08</td><td>R08</td><td>8" Round Downlight</td></tr><tr><td>TK-PUSH2-R10</td><td>R10</td><td>10" Round Downlight</td></tr></table> TK-PUSH2-R06 4 inch TK-PUSH2-R08 8 inch TK-PUSH2-R10 10 inch	Product ID	Aperture/Shape/Function		TK-PUSH2-R06	R06	6" Round Downlight	TK-PUSH2-R08	R08	8" Round Downlight	TK-PUSH2-R10	R10	10" Round Downlight
Product ID	Aperture/Shape/Function																	
TK-PUSH2-R06	R06	6" Round Downlight																
TK-PUSH2-R08	R08	8" Round Downlight																
TK-PUSH2-R10	R10	10" Round Downlight																


LED COMMERCIAL DOWNLIGHT

TK-PUSH2™ Series

Specification Features


Input Voltage	100-277 V / 100-347V
Color Temperature (CCT)	5CCT / 3CCT / Single CCT (2700K,3000,3500K,4000K,6000K)
Luminous efficacy (Lm/W)	83/100 Lm/W
Color Rendering Index (CRI)	90+
Dimmable	0-10V
Beam Angle	60-80°
Operating Temperature	-20°C ~+ 40°C
Life Span	50,000+ Hrs

Dimensions

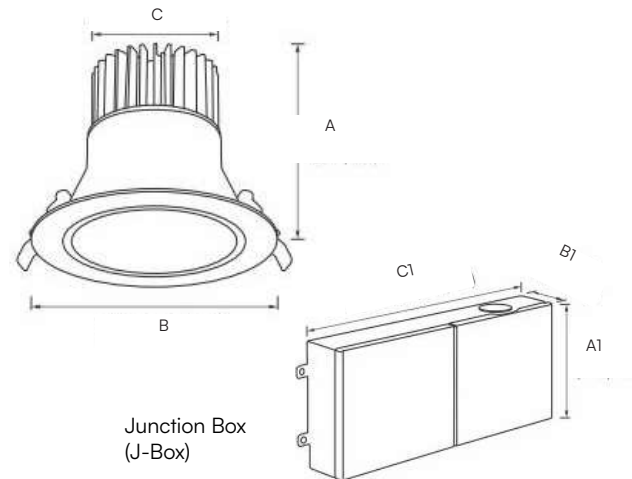


Part Number	A (Assembled Height)	B (Aperture Diameter)	C (Module Heat Sink)	A1 (J-Box Length)	B1 (J-Box Width)	C1 (J-Box Height)
TK-PUSH2-6	5.8"	7.8"	6"	3.8"	1.8"	7.4"
TK-PUSH2-8	6.4"	9.8"	8"			
TK-PUSH2-10	6.8"	11"	10"			

Photometric

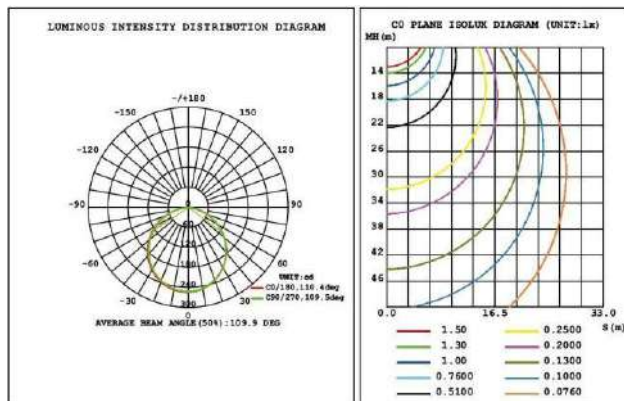

LED Driver

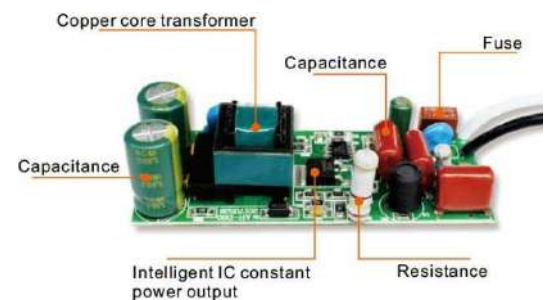

Product Structure



Fully Assembled Fixture



Engine with
FCC No Flicker Driver



Interchangeable Trims
6", 8", 10"

