

Catalog:	
Project:	
Type:	Date:
Notes:	

COMBO EMERGENCY EXIT LIGHT

TK-EE-7082™ Series

Description

Tektron's EE-7082 Combo Emergency Exit Light features a universal, field-selectable single- or double-face configuration with two fully adjustable 1.2W LED lamp heads.

Applications

Ideal for malls, retail spaces, offices, hotels, hospitals, warehouses, and residential buildings requiring code-compliant emergency exit and egress lighting in damp locations.



Quick Ship
TK-EE-7082RX



Specification Features

Controls / Operations

Universal field-selectable single/double face design.
2 × 1.2W fully adjustable emergency lamp heads.
12 pcs 0.2W SMD LEDs (Total 2.4W).
Charging Time: 24 hours.
Emergency Discharge Time: 90 minutes.

Warranty

5 Years Limited Warranty.
For more information visit us at,
www.technoledlights.com/warrantyinfo

Certifications

UL 924 Listed for Damp Locations,
Meets NFPA 101 Life Safety Code, NEC, OSHA
California Energy Commission (CEC) Title 20
Compliant.

Installation / Mounting


Supports wall and ceiling mounting for flexible installation.

Ordering Information						Example: TK-EE-7082RX-W-RC	
TK	EE-7082	R	W	RC	[Blank]		
Brand	Series	Letter Color	Finish	Options	Voltage		
TK - TekTron	EE-7082R - Emergency Exit 7082R Series	R - Red G - Green	W - White	RC - Remote Capacity	120/277 VAC Design Double Faced		

Specification Features

Input Voltage	120/277VAC 60Hz
Input Rating	1.2W, 100MA
Operating Temperature	0°C to 40°C (32°F to 104°F)
Illumination	12PCS 0.2W SMD LED total 2.4W
Battery	3.6V NiCad battery

Dimensions

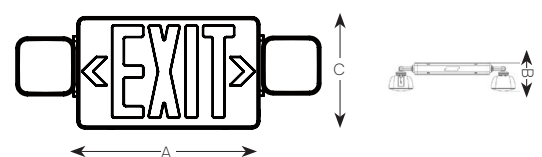

Part Number	A (Length)	B (Width)	C (Height)
TK-EE-7082	19.68 inches	4.26 inches	7.26 inches

