

EMERGENCY LED LIGHT

TK-7033™ Series

Description

Tektron's TK-7033 The lighting system consists of twelve 0.2W Surface Mount Device (SMD) LEDs with a total power consumption of 2.5W. It features IP65 protection, making it suitable for wet locations, and it is compliant with UL 924 and CEC Title 20 standards.

Applications

This Luminaries is suitable for using in Wet location, on Malls/Retail Spaces, Hotels, Hospitals, residential.



Quick Ship
TK-7033-W



Specifications and Features

Controls / Dimming

The device features an injection-molded thermoplastic ABS housing, and is powered by a maintenance-free 3.6V NiCad battery.

Warranty

5 Years Limited Warranty.
For more information visit us at,
www.technoledlights.com/warrantyinfo

Certifications

It complies with UL listings. Suitable for Damp Locations

Installation / Mounting

The installation process is straight forward and offers a range of mounting possibilities. Wall, end and ceiling

Ordering Information


Example: TK-7033-W-RC

TK	7033	W	RC	[Blank]
Brand	Series	Finish	Option	Voltage
TK - TekTron	7033 Emergency Light 7033 Series	W - White B - Black (optional)	RC- Remote Capacity TP- Tamper Proof Screws SDT- Self Diagnostics CW- Cold Weather	120/ 277VAC Watts 2.4W - 2.4Watts

Specifications and Features

Input Voltage	120/277 VAC 60Hz
Input Rating	2.4W, 32mA
Operating Temperature	0°C to 40°C (32°F to 104°F)
Illumination	12PSC 0.2W SMD LED total 2.4W
Battery	Maintenance-free 3.6V NiCad battery

Dimensions

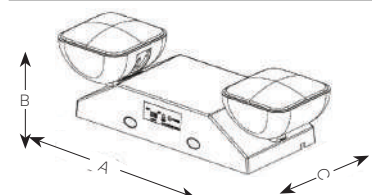

Part Number	A (Length)	B (Width)	C (Height)
TK-7033	13.36 inches	3.73 inches	4.5 inches

