

LED EMERGENCY EXIT

TK-CR-7069™ Series

Description

Tektron's CR-7069 LED Emergency Light features two fully adjustable 1W LED lamp heads delivering a total of 2W output. Designed for dependable emergency illumination, it includes a maintenance-free 3.6V NiCad battery providing 90mins of backup power. Constructed with injection-molded, flame-retardant ABS housing.



Applications

Ideal for wet and damp locations including malls, retail spaces, offices, hospitals, hotels, warehouses, and residential buildings requiring reliable emergency lighting.

Quick Ship

TK-CR-7069-W



Specification Features

Controls / Dimming

2 × 1W fully adjustable LED lamp heads.
Maintenance-free 3.6V NiCad battery.
Charging Time: 24 hours.
Emergency Discharge Time: 90 minutes.

Warranty

5 Years Limited Warranty.
For more information visit us at,
www.technoledlights.com/warrantyinfo

Certifications

UL 924 Listed (Damp Location Rated)
Meets NFPA 101 Life Safety Code, NEC, OSHA
CEC Title 20 Compliant

Installation / Mounting

Supports wall and ceiling mounting for flexible installation.

Ordering Information


Example: TK-CR-7069-W-RC

TK	CR-7069	W	RC	[Blank]
Brand	Series	Finish	Option	Voltage
TK - TekTron	CR-7069 Emergency Exit 7069 Series	W - White	RC- Remote Capacity TP- Tamper Proof Screws SDT- Self Diagnostics CW- Cold Weather	120/ 277VAC Watts 2X1W - 2Watts 4W - 4Watts

Specification Features

Input Voltage	120-277V, 60Hz
Input Rating	0.9W, 150mA
Operating Temperature	0°C to 40°C (32°F to 104°F)
Illumination	2PSC 1W LED total 2W
Battery	Maintenance-free 3.6V NiCad battery

Dimensions

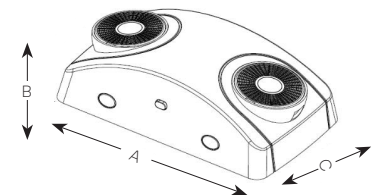

Part Number	A (Length)	B (Width)	C (Height)
TK-CR-7069	7.28 inches	2.05 inches	4.25 inches

