

## WET LOCATION EMERGENCY LIGHT

## TK-EE-7112™ Series

### Description

Tektron's EE-7112 Wet Location Emergency Light features 12 pcs 0.2W SMD LEDs delivering a total of 2.0W output. Designed for dependable performance in harsh environments, it is IP65 rated and suitable for wet locations.

### Applications

Ideal for wet and damp locations including malls, retail spaces, hotels, hospitals, warehouses, stairwells, and residential buildings requiring reliable emergency illumination.



Quick Ship  
TK-EE-7112-W



### Specification Features

#### Controls / Operations

12 × 0.2W SMD LEDs (Total 2.4W).  
Maintenance-free 3.6V NiCad battery.  
Charging Time: 24 hours.  
Emergency Discharge Time: 90 minutes.

#### Warranty

5 Years Limited Warranty.  
For more information visit us at,  
[www.technoledlights.com/warrantyinfo](http://www.technoledlights.com/warrantyinfo)

#### Certifications

UL 924 Listed for Wet Locations  
Meets NFPA 101 Life Safety Code, NEC, OSHA  
California Energy Commission (CEC) Title 20  
Compliant.

#### Installation / Mounting

Supports wall, end, and ceiling mounting for flexible installation.

## Ordering Information


Example: TK-EE-7112-W-RC

| TK           | EE-7112                               | W                      | RC                                                                                          | [Blank]                                         |
|--------------|---------------------------------------|------------------------|---------------------------------------------------------------------------------------------|-------------------------------------------------|
|              |                                       |                        |                                                                                             |                                                 |
| Brand        | Series                                | Finish                 | Option                                                                                      | Voltage                                         |
| TK - TekTron | EE-7112<br>Emergency Exit 7112 Series | W - White<br>B - Black | RC- Remote Capacity<br>TP- Tamper Proof Screws<br>SDT- Self Diagnostics<br>CW- Cold Weather | 120/ 347VAC<br><br>Watts<br><br>2.4W - 2.4Watts |

### Specification Features

|                       |                                     |
|-----------------------|-------------------------------------|
| Input Voltage         | 120-347VAC 60Hz                     |
| Input Rating          | 2.0W, 25mA                          |
| Operating Temperature | 0°C to 40°C (32°F to 104°F)         |
| Illumination          | 12PSC 0.2W SMD LED total 2.4W       |
| Battery               | Maintenance-free 3.6V NiCad battery |

### Dimensions

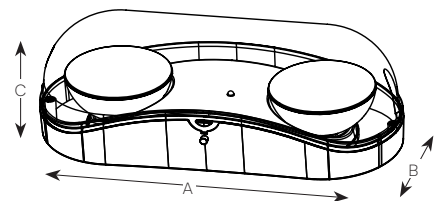

| Part Number | A (Length)   | B (Width)   | C (Height)    |
|-------------|--------------|-------------|---------------|
| TK-EE-7112  | 11.96 inches | 5.12 inches | 4.04aa inches |

