

LED Shoebox Area Light


TK-SALO5™ Series

Description

TekTron's TK-SALO5 Shoebox Area Light is a wattage and CCT adjustable outdoor luminaire delivering up to 160 lm/W. Built with a die-cast aluminum housing and high-transmittance PC lens, it provides excellent heat dissipation, long lifespan, and reliable performance. The rotate-link driver box allows easy maintenance, with optional LiFud, Sosen, or DONE drivers available.

Applications

Suitable for parking lots, streets, sidewalks, sports fields, campuses, parks, and other industrial and commercial outdoor areas requiring reliable, high-performance illumination.

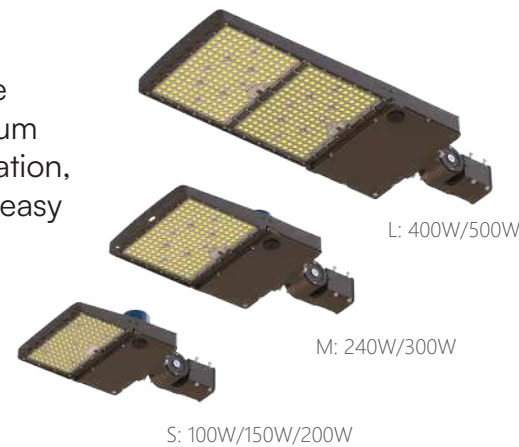

Quick Ship

TK-SALO5-300W-3CCT-TYPE3-M



Specification Features

Controls / Dimming

0—10V dimmable (standard). 4-in-1 field-adjustable wattage via DIP switch.
3-in-1 CCT selectable (30K/40K/50K standard).
PIR and Microwave sensor optional.

Certification

It complies with UL Listings, DLC listings, CB, CE Certified, RoHS Compliant, ErP Certified, IP65 Rated.

Warranty

5 Years Limited Warranty.
For more information visit us at,
www.technoledlights.com/warrantyinfo

Installation / Mounting

The installation process is straight forward and offers a range of mounting possibilities. SF Bracket, EA Bracket YK Bracket, TR Bracket, TR Bracket

Ordering Information


Example: TK-SALO5-300W-50K-CCPS

TK	SALO5	300W	3CCT	TYPE3	PS	Blank
Brand	Series	Watts (wattage Selectable)	Color Temp	Beam Angle	Options	Voltage
TK - TekTron	SALO5 - Shoebox Area light Series 5	100W - 50W/65W/80W/100W S - 150W - 80W/100W/120W/150W 200W - 100W/120W/150W/200W M - 240W - 120W/150W/200W/240W 300W - 150W/200W/240W/300W L - 400W - 200W/240W/300W/400W 500W - 240W/300W/400W/500W	30K - 3000K 3CCT - 40K - 4000K 50K - 5000K 40K - 4000K 3CCT - 50K - 5000K 57K - 5700K (Optional)	T2 Type II T3 Type III T4 Type IV T5 Type V	[Blank] Standard PS3 - NEMA 3pin Receptacle and Photocell PS5 - NEMA 5pin Receptacle PS7 - NEMA 7pin Receptacle	[Blank] AC100-277V (standard) AC120-347V (optional) AC200-480V (optional) Finish B - Bronze (standard)

Specification Features

Input Voltage	AC120-277V or AC120-347V or AC200-480V
Color Temperature (3CCT)	3000K/4000K/5000K or 4000K/5000K/5700K
Luminous efficacy (Lm/W)	Upto 160 Lm/W
Color Rendering Index (CRI)	70+
Dimmable	0-10V
Power Factor	≥ 0.90
Operating Temperature	-40°C ~ +45°C
IP Rating	IP 65 Rated
Total Harmonic Distortion (THD)	≤ 20%
Life Span	50,000+ Hrs

Dimensions

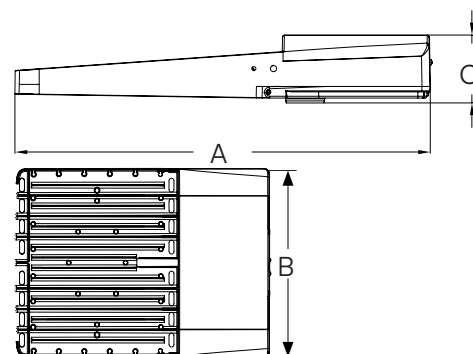

Part Number	A (Length)	B (Width)	C (Height)
TK-SALO5-S (100W-150W-200W)	12.32 inches	11.30 inches	2.64 inches
TK-SALO5-M (240W-300W)	16.57 inches	12.20 inches	2.71 inches
TK-SALO5-L (400W-500W)	26.77 inches	12.17 inches	2.80 inches

Optional Accessories

Single Person Installation (Mounting Options)

This design allows you to easily and securely install the product by sliding and locking it in place.




Slip Fitter Bracket

EA Bracket

YK Bracket


TR Bracket

Photometrics

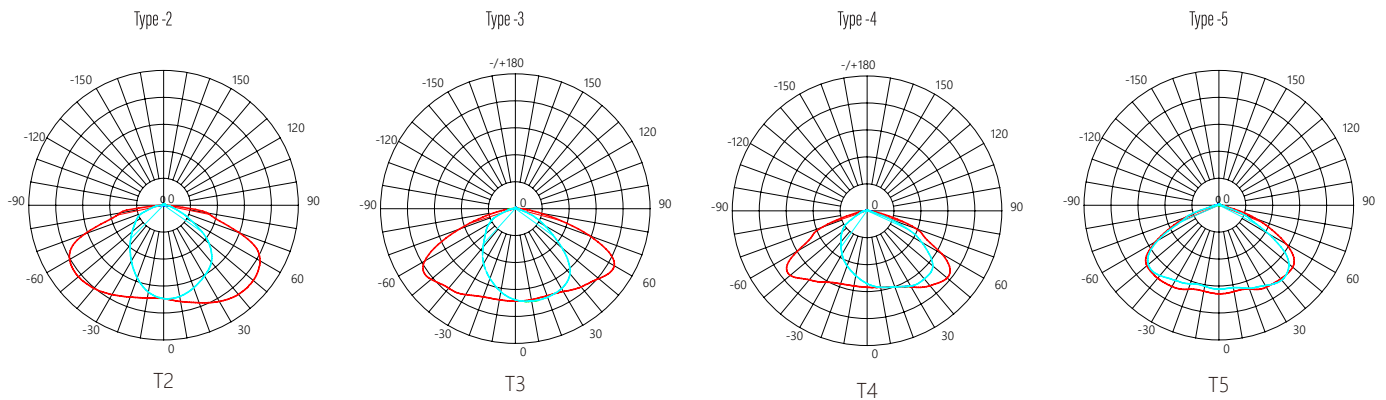

Internal Reflectance Optic Technology

This technology gives better optical control to make the light level more uniform and prevent the loss of light. It has a simple layout and installation that saves poles, energy, installation costs and enhances visibility. It meets the Dark Sky standards with no light spill or glare.

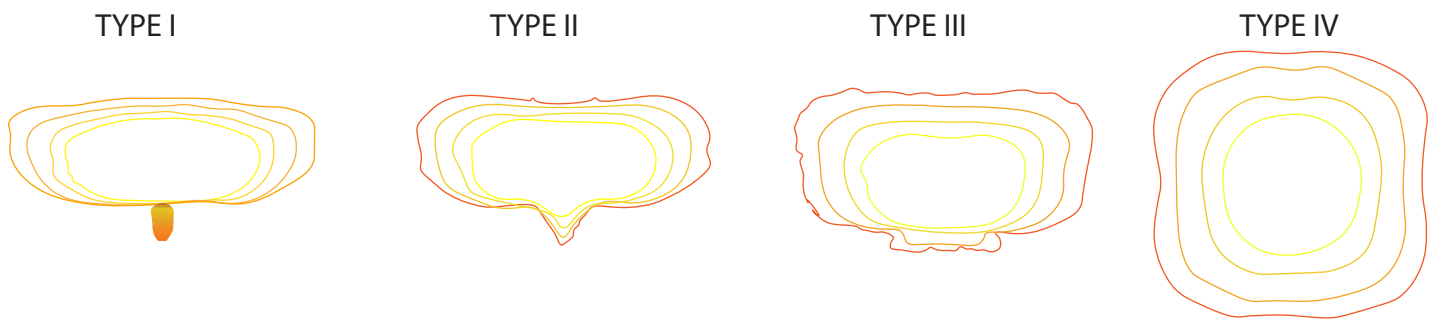

Light Control Solution (Optional)


1. Cost-Effective Light Controlled Accessories

2. Multi-function Light Controlled Accessories



Photocell

3-PIN: Lighting Switch

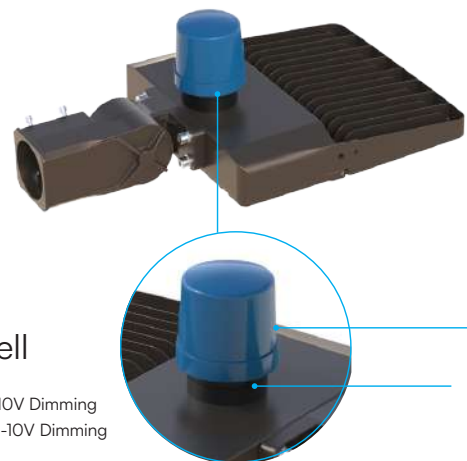

NEMA+Photocell

3-PIN: Lighting Switch

5-PIN: Expandable DALI or 0-10V Dimming

7-PIN: Expandable DALI and 0-10V Dimming

Photocell

+ NEMA

Infographic

