

LED ROUND Highbay Light

TK-RHB5™ Series

Description

Tektron's TK-RHB5 Elegant Round High Bay Light are available in 100W, 150W, 200W and 240W. 0-10V Dimmable & Power selectable. Comes with Optical UV resistant PC lens with 94% light transmittance, IK08. Top brand LED chip and driver, ensure product quality for lifetime.



Application

Ideal for areas like Warehouses and Distribution Centers, Gymnasiums and Indoor Sports Arenas, Retail and Wholesale Stores, Automotive Service Centers etc.

Quick Ship

TK-RHB5-100W-3CCT-60D-XX
 TK-RHB5-150W-3CCT-90D-XX
 TK-RHB5-200W-3CCT-120D-XX



Specifications Features

Housing / Dimming

Die-casting technology by ADC12, excellent thermal management.

Certifications

It complies with ETL Listed. IK08 Rated, and IP65 Rated.

Warranty

5 Years Limited Warranty.
 For more information visit us at,
<https://www.technoledlights.com/warrantyinfo>

Installation and Mounting

The installation process is straight forward and offers a range of mounting possibilities. Typical Mounting: Standard Ring Mount, Hook Mount, U Bracket Mount.

Ordering Information


Example: TK-RHB5-150W-3CCT-120D-XX

TK	RHB5	150W	3CCT	120D	XX
Brand	Series	Wattage	Color Temperature	Optics/Lens	Sensors
TK- TekTron	RHB5- Round High Bay Light Series 5	100W - 100 Watts 150W - 150 Watts 200W - 200 Watts 240W - 240 Watts 300W - 300 Watts	30K - 3000K 40K - 4000K 50K - 5000K 57K - 6500K 65K - 6500K	60D - 60° Lens 90D - 90° Lens 120D - 120° Lens	MSI - Microwave Sensor ZS - Zhaga Socket ALR - Alu Reflector
				Input Voltage	Mountings
				AC100-277V, 50/60HZ	HK - Hook Mount UK - U-Bracket Mount NM - 1/2 NPT Pipe Mount
		Wattage Adjustable <i>Optional</i>	3CCT Adjustable <i>Optional</i>		

LED ROUND HIGHBAY LIGHT

TK-RHB5™ Series

Input Voltage	100-277V, 50/60Hz
Power	100W, 150W, 300W
Color Temperature	3CCT Selectable
Luminous Efficiency	150-190 Lm/w
Dimming	0-10V Dimming
Color Rendering Index (CRI)	>80
Beam Angle	60°/90°/120°
Power Factor	>0.9
IK Rating	IK08
IP Rating	IP65
Life Span	50,000 hrs

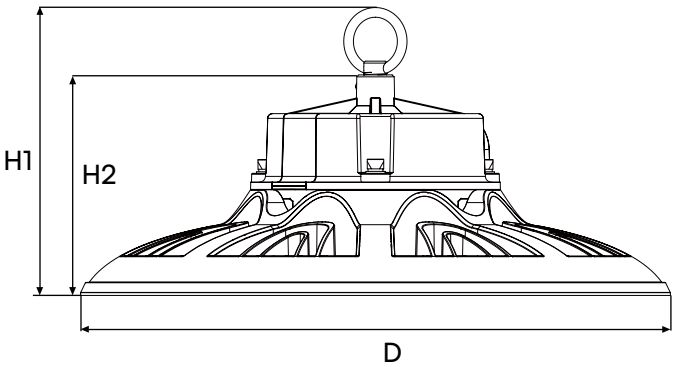

Part Number	Diameter (D)	Height (H1)	Height (H2)
TK-RHB5-100W	9.17 inch	5.7 inch	4.33 inch
TK-RHB5-150W	10.23 inch	5.62 inch	4.29 inch
TK-RHB5-200W	11.29 inch	5.75 inch	4.40 inch
TK-RHB5-240W	12.00 inch	5.86 inch	4.48 inch



1. CCT : 3000K/4000K/5000K/5700K/6500K
2. Lumen Output: 150lm/W, 170lm/W, 190lm/W
3. CRI>80
4. Lifetime: 50,000H@L70

PHILIPS or SOSEN Driver

3CCT & Power Selectable

For ZHAGA or Sonser

1. Zhaga Socket
2. Microwave Sonser


High Strength Polycarbonate Lens

1. Beam angle options : 60/90/120°
2. IK 08

Aluminum Housing

Die-casting technology by ADC12
excellent thermal management

Photometric

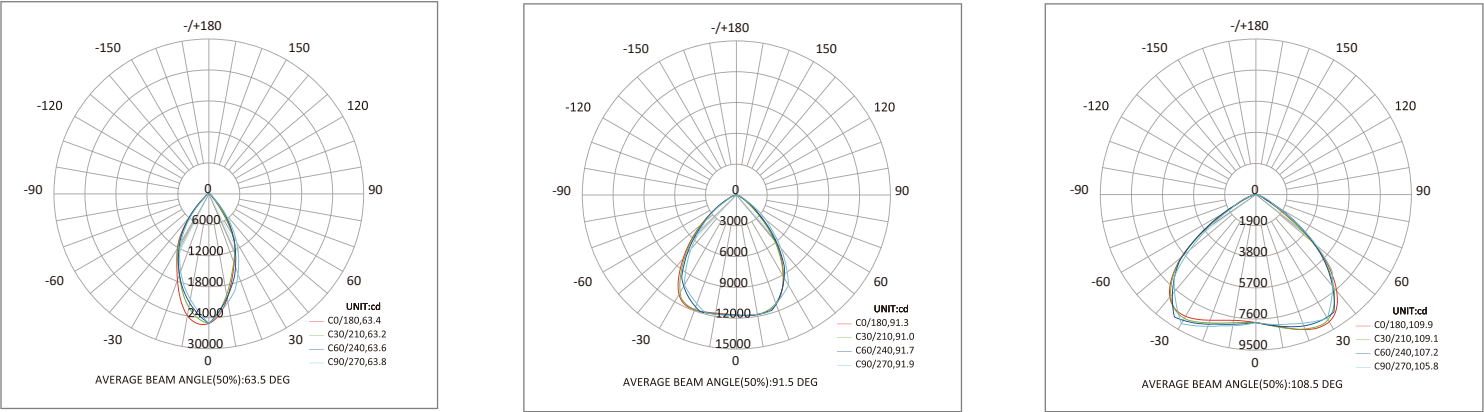

Accessories



Zhaga Socket

Microwave Sensor

Alu Reflector

3CCT, Power & Beam Angle Selectable




Safety Steel Rope



U Bracket

A		BC	
100W	80W	60W	
150W	120W	100W	
200W	150W	100W	
240W	200W	150W	

WW	NW	CW
4000K	5000K	5700K




150-190lm/W



IP65



IK08



CCT Selectable



Power Selectable



Microwave sensor



Zhaga

