

RETROFIT SNAP-IN DOWNLIGHT

TK-RDXX1™ Series

Description

Tektron's RDXX1 is a 6 and 4 inch LED Retrofit Downlight provides bright, Recessed in ceiling, new construction or retrofit. This fixture has an integrated junction box, making installation quick and easy. Design with a baffle trim. This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

Application

Ideal for retail lighting, commercial lighting, residential lighting, office lighting, kitchen lighting, bathroom lighting, basement lighting.



Quick Ship

TK-RDXX1-4-10W-5CCT
TK-RDXX1-6-15W-5CCT

Specifications Features

Controls / Dimming

Compatible with most TRIAC dimmers to give user a smooth 5%-100% dimming to choose the desired brightness.

Warranty

5 Years Limited Warranty.

For more information visit us at,

<https://www.technoledlights.com/warrantyinfo>

Certifications

It compiles with ETL listing , Energy Star Rated, IC Rated and TITLE 24 Rated.

Installation and Mounting

No existing recessed housing required. Simply connect the junction box wiring on the back of the recessed downlight to your light switch and place it into your ceiling.

Ordering Information

Example: TK-RDXX1-6-15W-5CCT

TK	RDXX1	6	15W	5CCT	[BLANK]
Brand	Series	Size	Wattage	Color Temperature	Input Voltage
TK- TekTron	RDXX1-	4" - 4 inch	10W - 10 Watts	27K - 2700K	120V 60Hz voltage
	Retrofit Round Downlight	6" - 6 inch	15W - 15 Watts	30K - 3000K	
				35K - 3500K	
				40K - 4000K	Dimming
				50K - 5000K	TRIAC Dimming
				(Selectable)	



RETROFIT SNAP-IN DOWNLIGHT

TK-RDJX1™ Series

Specification Features

Input Voltage	120V 60H
Wattage	10W, 15W
Color Temperature	27K/30K/35K/40K/50K
Color Rendering Index (CRI)	>90
Dimming	TRIAC Dimming
Beam Angle	100°
Working Temperature	-4°F to 113°F
Power Factor	0.9
Life Span	50,000 hrs

Dimensions

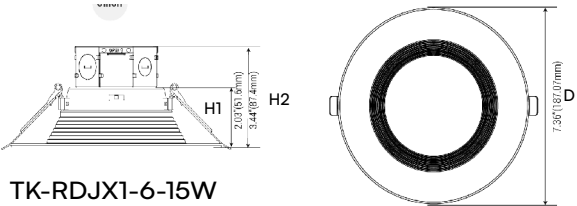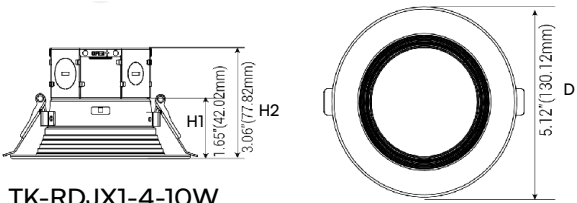


Part Number	Diameter (D)	Height (H1)	Height (H2)
TK-RDJX1-4-10W	5.12 inch	1.65 inch	3.06 inch
TK-RDJX1-6-15W	7.36 inch	2.03 inch	3.44 inch

Recommended Dimmers


LUTRON			
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	PD-6WCL
S-600PR-WH	SLV-600P-AL	GT-600P	MSCL-OP153M
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	MACL-153M//MA-R

LEVITON	
6672	
6674	RNLO6
DSLO6	IPL06

Accessories




Wire Nuts




Hole Cutout Card

SIZE	HOLE SIZE
4inch	110mm
6inch	160mm

Installation



1. Fix the light into the Hole and adjust the clips with the ceiling.



2. Connect with electricity wires with Wire Nuts and Installation is done.

