

5CCT COMMERCIAL BACKLIT DOWNLIGHT

TK-CDX5™ Series

Description

Tektron's TK-CDX5 round commercial LED downlight features a slim, "One Family" design available in 4 , 6 , and 8 sizes. It offers selectable wattage and 5CCT color temperature options, delivering high efficiency, excellent color rendering (CRI 90), and a deep-regress, low-glare appearance


Applications

This luminaire is suitable for use in wet locations and is ideal for malls and retail spaces, hotels, hospitals, and residential applications.



Quick Ship

TK-CDX5R4-12-9SCCT
TK-CDX5R6-15-9SCCT
TK-CDX5R6-24-9SCCT
TK-CDX5R8-30-9SCCT

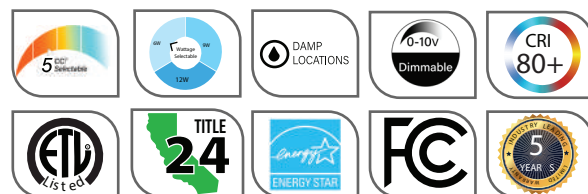

Specifications and Features

Controls / Dimming

Equipped with a high-quality remote driver, the CDX5 supports smooth 0—10V dimming from 10% to 100%. The Class 2 isolated driver ensures stable, flicker-free operation with a high power factor, making it compatible with industry-standard 0—10V control systems.

Warranty

5 Years Limited Warranty.

For more information visit us at,

www.technoledlights.com/warrantyinfo

Certifications

It complies with ETL Intertek Listed, FCC, IC Rated & California Title 24,

Installation / Mounting

Equipped with a high-quality remote driver, the CDX5 supports smooth 0—10V dimming from 10% to 100%. The Class 2 isolated driver ensures stable, flicker-free operation with a high power factor, making it compatible with industry-standard 0—10V control systems.

Ordering Information

Example: TK-CDX5R4-10-95CCT


TK	CDX5	R4	10	9S	5CCT	Options
Brand	Series	Round	Watts	CRI	Color Temp	Voltage and Frequency
TK - TekTron	CDX5 - Commercial Downlight	R4 - 4 inch	4 inch 10 - 10 Watt 12 - 6/9/12 Watt	9S - >90 CRI	27K - 2700K 30K - 3000K 5CCT - 35K - 3500K 40K - 4000K 50K - 5000K	UV- 120-277V 50/60Hz
		R6 - 6 inch	6 inch 15 - 15 Watt 20 - 20 Watt 24 - 14/18/24 Watt			Finish Blank BL Black Matte black
		R8 - 8 inch	8 inch 22 - 22 Watt 30 - 18/24/30 Watt			

Specifications and Features


Input Voltage	120-277V
Color Temperature (CCT)	2700K/3000K/4000K/5000K/6000K
Luminous efficacy (Lm/W)	Upto 95 Lm/W
Color Rendering Index (CRI)	90+
Power Factor (PF)	>0.90
LED Chip	SMD 3528
Operating Temperature	-25°C~+40°C
Beam Angle	90°
Frequency	50/60 Hz
Life Span	50,000+ Hrs

Part Number	A [Diameter]		B [Width]		C [Height]		
	A (overall Cutout)	A1 (Diameter)	B (Overall Width)	B1 (Aperture Width)	C (Overall Height)	C1 (Height Till Clip)	C2 (Height Till Box)
TK-CDX5-R4-XX-9SCT	5.04 inches	2.88 inches	3.89 inches	3.73 inches	1.97 inches	0.59 inches	0.84 inches
TK-CDX5-R6-XX-9SCT	7.36 inches	3.32 inches	5.77 inches	4.31 inches	2.84 inches	1.47 inches	1.58 inches
TK-CDX5-R8-XX-9SCT	8.66 inches	4.17 inches	6.92 inches	6.41 inches	3.39 inches	1.40 inches	2.07 inches


Photometric

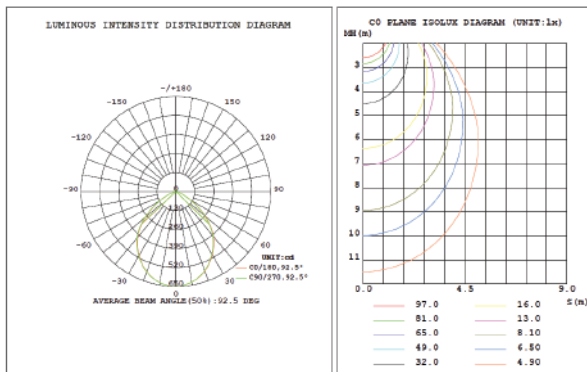

Installation

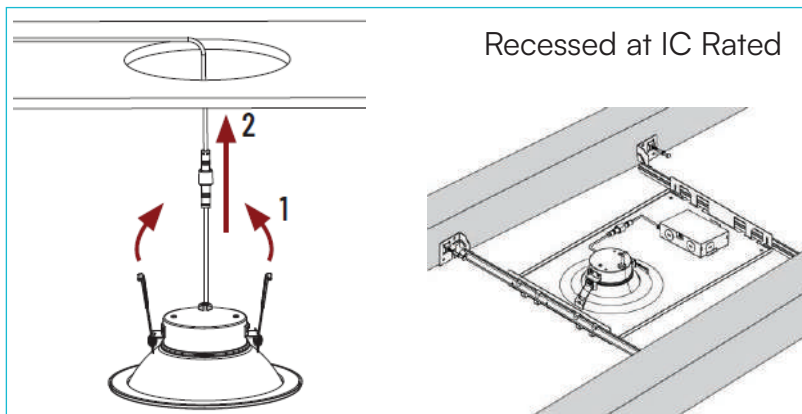

Dimensions

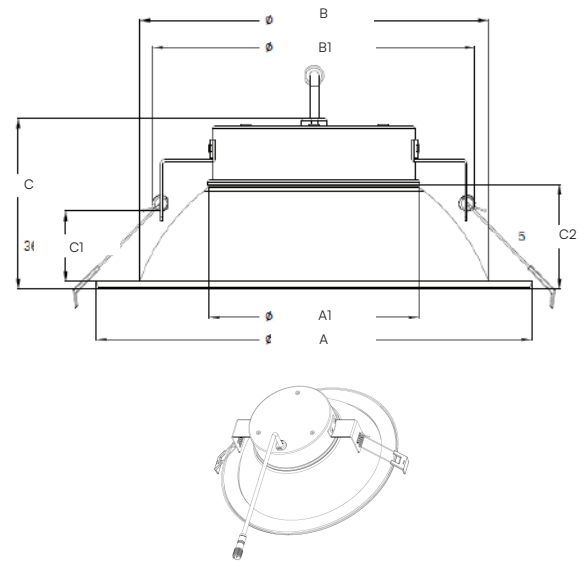

Accessories

