

LED CENTER BASKET TROFFER LIGHT

TK-CBT5™ Series

Description

Tektron's TK-CBT5 LED Center Basket Troffer is designed for high-performance commercial lighting, offering unmatched versatility with 3CCT and 3-wattage selectable technology in a single fixture. Built with a durable galvanized steel housing, a high-quality PC diffuser and delivers uniform, low-glare illumination.

Application

Ideal for office spaces, schools, Commercial lighting like shopping malls, supermarkets, retail shops etc. Other applications such as hospitals, and laboratories.

Quick Ship

TK-CBT5-14-30W-3CCT-XX
TK-CBT5-22-40W-3CCT-XX
TK-CBT5-24-50W-3CCT-XX



Specifications Features

Housing / Dimming

Housing of Galvanized sheet in white finish, can be stackable. With PC lens, never turn yellowing. Uniformity light, low glare with high reliability.

Warranty

5 Years Limited Warranty.

For more information visit us at,

<https://www.technoledlights.com/warrantyinfo>

Certifications

It compiles with UL listing, DLC Premium Listed, ROHS compliment and IC Rated.

Installation and Mounting

Recessed in T-bar grid ceiling with integral earthquake clips for secure attachment enclosure
Surface mount kit accessories available.

Ordering Information

Example: TK-CBT5-24-50W-3CCT-XX

TK	BLFP4	24	50W	3CCT	[Optional]
Brand	Series	Size	Wattage	Color Temperature	Input Voltage
TK- TekTron	CBT5- LED Center Basket Troffer Light	14 - 1X4 Feet	40W - 20/30/40W	35K - 3500K	A - AC120-277V
		22 - 2x2 Feet	30W - 20/25/30W 40W - 20/30/40W	3CCT - 40K - 4000K	
		24 - 2x4 Feet	40W - 30/35/40W 50W - 30/40/50W	50K - 5000K	Accessories
			Wattage Selectable	3CCT Selectable	MS - Motion Sensor PIR - Photocell Sensor EM - Emergency Backup BH - Bluetooth Sensor


LED CENTER BASKET TROFFER LIGHT

TK-CBT5™ Series

Specification Features



Input Voltage	AC120 - 277V,
Lumen Output	2500-6250lm
Color Temperature	3CCT Selectable
Color Rendering Index (CRI)	>80
Dimming	0-10V Dimming
Working Temperature	-4°F to 95°F
Lumen Efficacy	125lm/W
Power Factor	>0.9
THD	<20%
Beam Angle	120°
Life Span	50,000 hrs

Dimensions

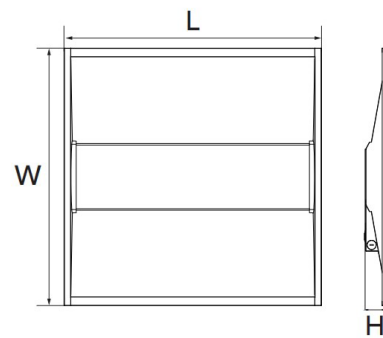

Part Number	Length (L)	Width (W)	Height (H)
TK-CBT5-14	23.74 inch	23.74 inch	1.97 inch
TK-CBT5-22	47.76 inch	11.93 inch	1.97 inch
TK-CBT5-24	47.76 inch	23.74 inch	1.97 inch

Photometric

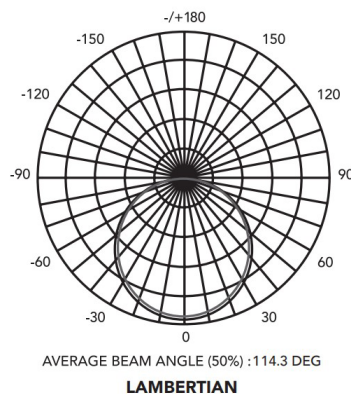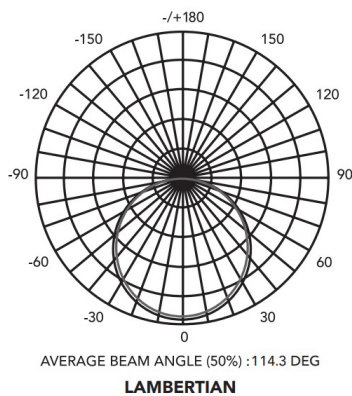


Accessories



Motion Sensor



Emergency Driver

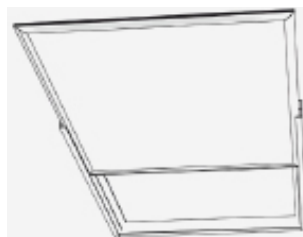

Surface Mount Kit



Photocell Sensor

