

LED STADIUM LIGHT

TK-SR05™ Series

Description

Tektron's TK-SR05 Series Sports & High Mast lighting provides an excellent optical design equipped with a polycarbonate lens and an integrated visor to effectively control spill light, eliminate upward light, and avoid light pollution. The fixture features an ADC12 Aluminum die-casting heat sink for a concise appearance and excellent thermal management. Utilizing a built-in breather valve to balance internal and external temperature.



Application

Ideal solution for areas with harsh conditions such as Soccer Fields, Basketball and Tennis Courts, Hockey Fields, Stadium Arenas, Airports, and other Athletic Industrial applications.

Quick Ship

TK-SR05-600W-5CCT

TK-SR05-1200W-5CCT



Specifications Features

Housing/ Features

Equipped with drivers for reliable power delivery. The ADC12 aluminum die-casting fixture housing and heat sink ensure a compact, concise appearance combined with excellent thermal management.

Warranty

5 Years Limited Warranty.

For more information visit us at,

<https://www.tektronled.com/warrantyinfo>

Certifications

It compiles with CE, UL Rated, and IP66 Rated, DLC Listed, ROHS Compliment and FCC Rated.

Installation and Mounting

Mounts securely using high-strength, cold-rolled plate brackets and arms. The racked angle includes a built-in handlebar for easy carrying and positioning.

Ordering Information


Example: TK-SR05-1200W-5CCT-AUV

TK	SR05	1200W	5CCT	A	UV
Brand	Series	Wattage	Color Temp	Beam Angle	Input Voltage
TK- TekTron	SR05 - LED Sports & High Mast Light	400W- 400 Watts 500W- 500 Watts 600W- 600 Watts 800W- 800 Watts 1000W- 1000 Watts 1200W- 1200 Watts	27K - 2700K 40K - 4000K 50K - 5000K 57K - 5700K 65K - 6500K 5CCT Selectable	A: 10° / 15° / 25° B: 45° / 60° / 90°	UV: AC100-305V, 50-60Hz

Specification Features

Input Voltage	AC100-305V, 50-60Hz
Efficiency	150 Lm/W
Color Temperature	2700K - 6500K
CRI	70+ / 80+ / 90+
LED Driver	Sosen/ Meanwell
Driver Efficiency	>92%
Power Factor	>0.95
Working Temperature	-35°C- +50°C
Beam Angle	10° / 15° / 25° / 45° / 60° / 90°
Life Span	50,000 hrs

Dimensions

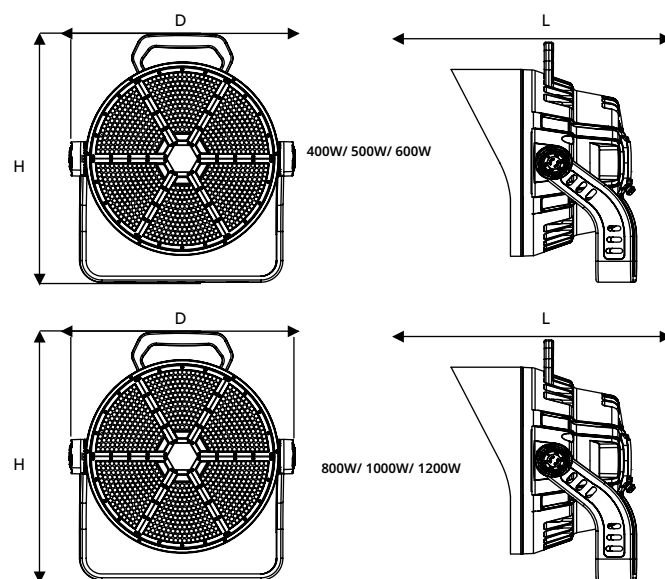

Part Number	Diameter (D)	Length (L)	Height (H)
TK-SR05-400W-600W	15.31 inch	20.55 inch	20.04 inch
TK-SR05-800W-1200W	19.57 inch	26.81 inch	25.98 inch

Product Info- Graphic

