

LED TRI-PROOF VAPOR LIGHT

TK-VPT1™ Series

Description

Tektron's TK-VPT1 Series VAPOR series tri-proof light is designed with Durable aluminum housing with translucent frosted lens cover. It can be used in places requiring corrosion-resistant lighting. While common tri-proof light cannot reach this requirement Photoelectric separation design and LED lifespan up to 50,000hrs.

Application

Ideal solution for areas with commercial spaces such as warehouses, garages, stairwells, storage areas, and damp or harsh environments.

Quick Ship

TK-VPT1-2FT-20W-3CCT-DUV-XX
 TK-VPT1-4FT-54W-3CCT-DUV-XX
 TK-VPT1-8FT-100W-3CCT-DUV-XX
 TK-VPT1-4FT-50WT-3CCT-DUV-XX



Specifications Features

Dimming/ Housing

Compatible with most 0-10V dimming to give user a smooth 10%-100% dimming to choose the desired brightness. Aluminum frame, ensures durable quality and efficient heat dissipation.

Warranty

5 Years Limited Warranty.
 For more information visit us at,
<https://www.tektronled.com/warrantyinfo>

Certifications

It compiles with ROHS Compliment, ETL Rated, IP66 Rated, CE Listed and FCC Rated.

Installation and Mounting

Suspension via cable suspension mechanism wall or ceiling mounting via screws. As per luminous characteristic and excellent efficiency are suitable for mounting in special areas.

Ordering Information

Example: TK-VPT1-50W-3CCT-DUV-XX

TK	VPT1	4FT	150W	3CCT	XX	XX
Brand	Series	Size	Wattage	Color Temp	Input Voltage	Mounting
TK-	VPT1 -	2FT - 2 Feet 4FT - 4 Feet 8FT - 8 Feet	20W- 20 Watts 50W- 50 Watts 100W- 100 Watts 50WT- 32/44/50W	30K - 3500K 40K - 4000K 50K - 5000K	UV- AC120-277V HV-AC120-347V	Surface Mount/ Chain
TekTron	LED Vapor Tri- Proof Light				Dimming D: 0-10V Dimming	Accessories EM: Emergency Driver F: Frost Cover
			Wattage Selectable	3CCT Selectable		


LED VAPOR TRI-PROOF LIGHT

TK-VPT1™ Series

Specification Features





Input Voltage	120-277V, 120-347V
Efficiency	130 Lm/W
Lumen Output	5200-19500lm
Housing	PC+PC/GRP+PMMA
Color Temperature	3CCT (30K/40K/50K)
CRI	>80
Power Factor	0.9
Working Temperature	-40°C to 50°C
Beam Angle	120°
Life Span	50,000 hrs

Dimensions

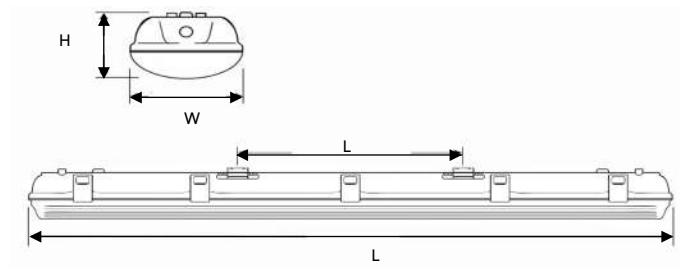


Part Number	Length (L)	Width (W)	Height (H)
TK-VPT1-2FT	23.62 inch	4.92 inch	3.38 inch
TK-VPT1-4FT	47.25 inch	10.42 inch	4.13 inch
TK-VPT1-8FT	94.48 inch	10.42 inch	4.13 inch

Photometric

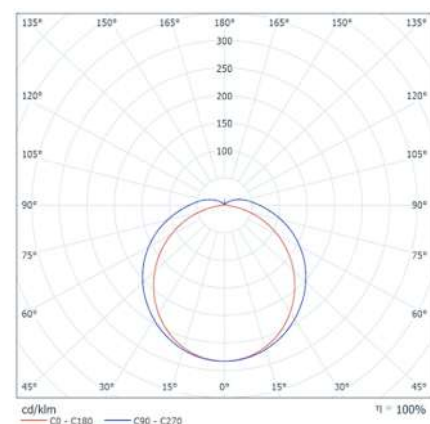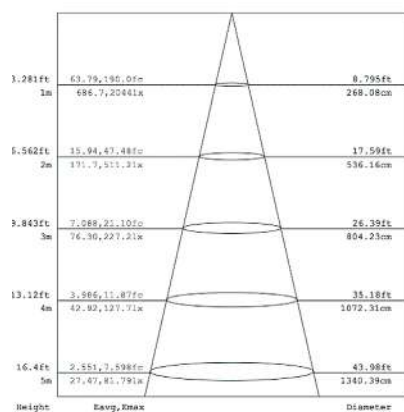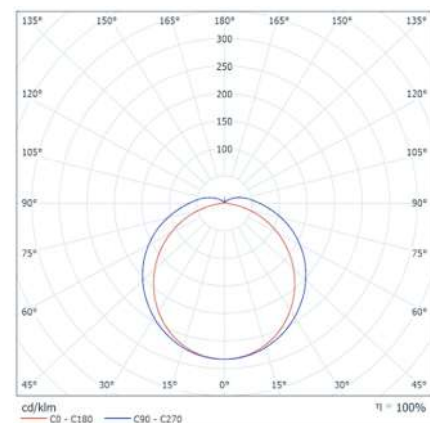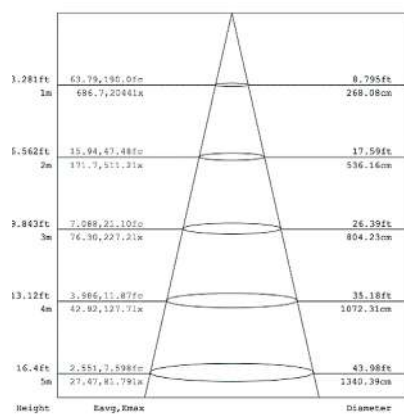

Info- Graphic

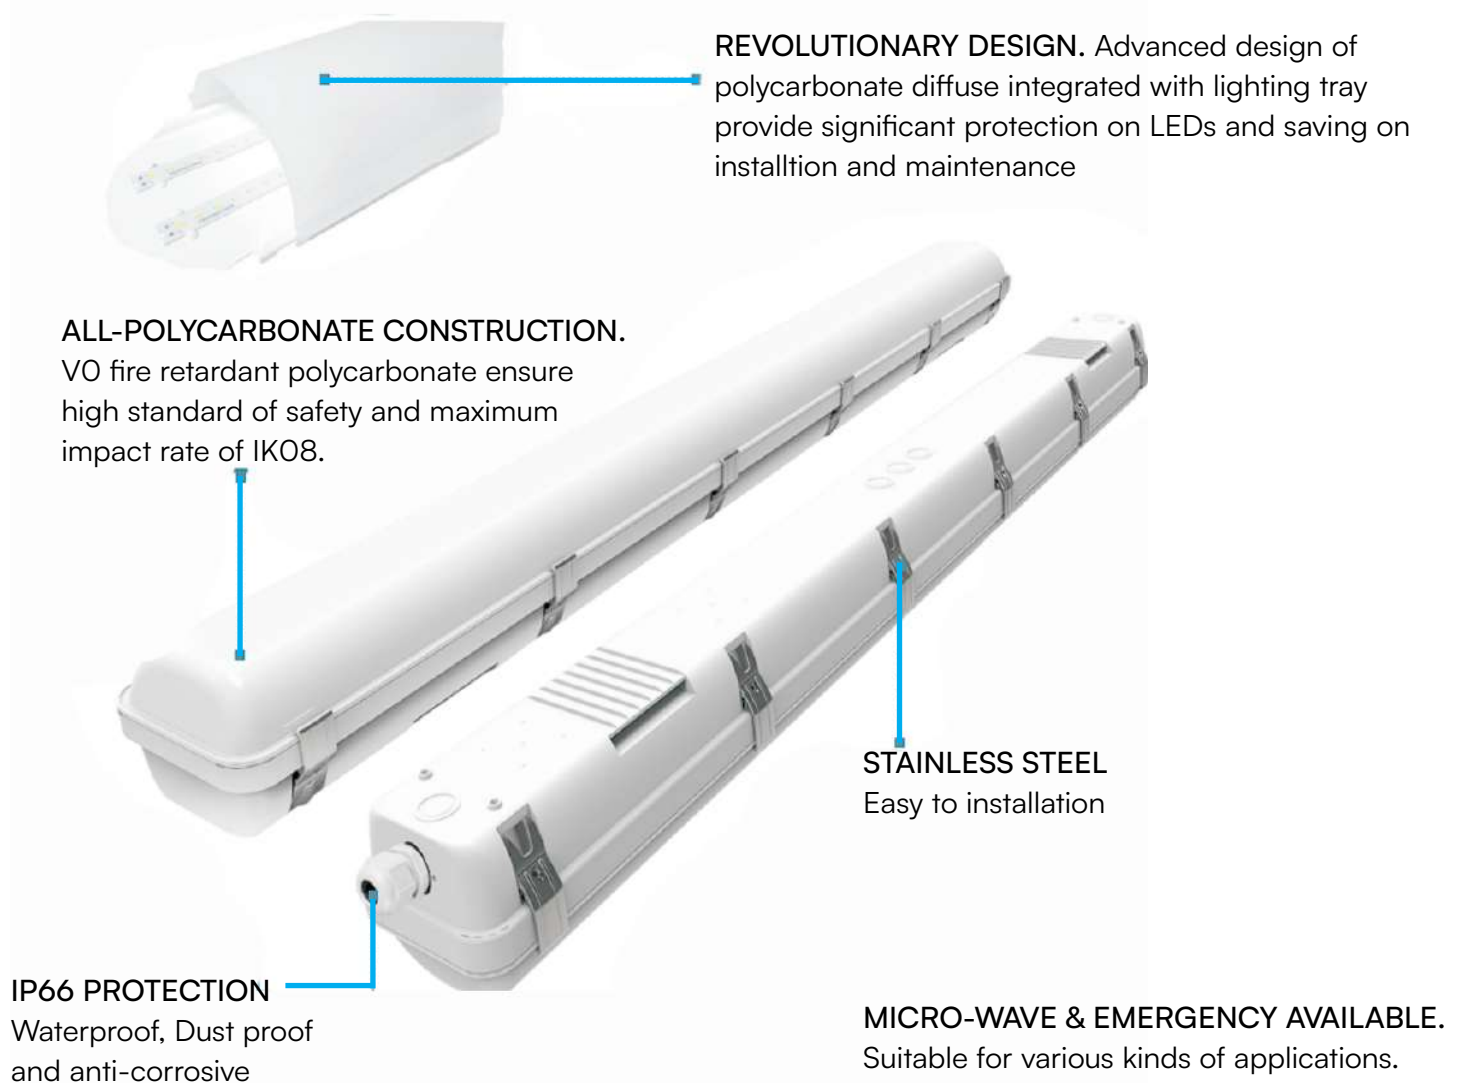

Warnings:

1. Risk of fire or electric shock. Fixture installation requires knowledge of luminaires electrical systems. If not qualified, DO NOT attempt installation. Contact a qualified electrician.
2. Risk of fire or electric shock. Suitable for wet locations. Always turn off the power supply before installation.
3. Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.
4. DO NOT install fixture on unstable, loose or easily breakable surface.
5. DO NOT exert force on the surface of the fixture.

