SUNGOLDPOWER

Reminder: PV ground and AC ground should be isolated from each other and NOT connected together!!!

12*450W SOLAR PANEL

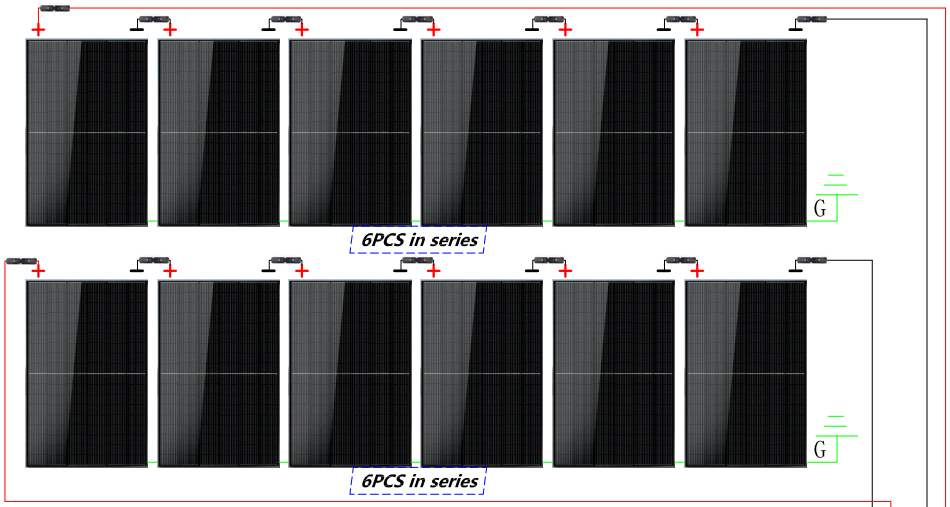

8KW 48VDC INVERTER





Utility



Generator

L1
L2
N

AC INPUT

AC OUTPUT

L1
L2
N



25A breaker

10AWG

2/0AWG

200A breaker

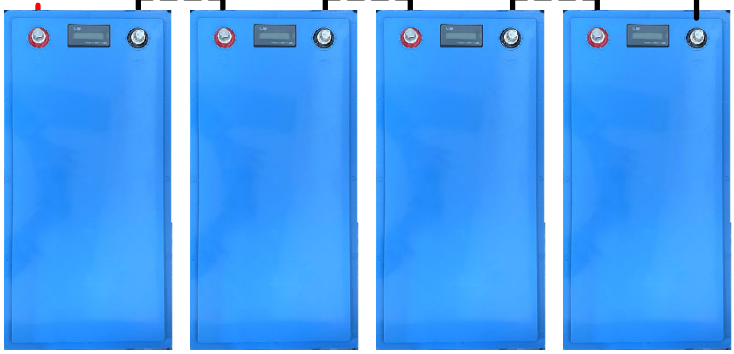

4*200AH 12V LIFEPO4 BATTERY *in series*

(Note: Battery cables are to be provided by the customer based on site conditions.)

COMPLETE OFF-GRID SOLAR KIT 8000W 48V 120V/240V OUTPUT

10.24KWH LITHIUM BATTERY 5400 WATTS(450W*12PCS) SOLAR PANELS

SGK-8MAX