

IN/OUT BOX™ for Fans and Fixtures

Made in USA 

NEW!
Outlet boxes
on back

Adjustable Non-Metallic Box for New Construction



Catalog Number	UPC/DEI/NAED Mfg. #018997	Description	Size/Cu Inches	Unit/Std Pkg
FBA426	02575	Adjustable Fan/Fixture Box	Round 21.0 cu in	25/ctn

Includes (4) installation screws, NM cable connector.
Pre-set for 1/2" wall thickness - Depth adjustment up to 1-1/2".
Rated for 70 lb fan; 100 lb fixture.



NEW!

FBA426
Fan/Fixture Box
**Easy Installation
in New Construction**

Arlington's IN/OUT BOX **for fans and ceiling fixtures** adjusts up to 1-1/2" to accommodate varying ceiling thicknesses, like single or double drywall.

- Pre-set for 1/2" ceiling...
Depth adjusts up to 1-1/2"
- Always accessible depth adjustment screw allows for depth adjustment of box *after* the ceiling is in place
- Complies with 2014 NEC, 314.20 for set back boxes
- Mounts securely to joist in new construction
- Listed for fans up to 70 lbs; fixtures up to 100 lbs
- UL/CSA Listed
- **2-Hour Fire Rating**

FBA426
Adjustable Fan/Fixture Box

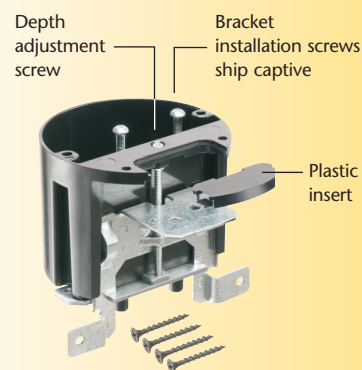


1 Install FBA426 onto joist with (4) screws: (2) through support tabs (A and B), and (2) more through the front flange.



2 Slide plastic insert into box.



3 Pull NM cable through installed NM connector.




Underside views



**Rated for Fans
up to 70 lbs;
and Fixtures
up to 100 lbs**



4 Cutaway: Box set back in double drywall ceiling. FBA426 adjusts up to 1-1/2" for ceiling thickness.



5 After installation of wall board use the depth adjustment screw to adjust position of box if necessary.



6 Box flush with ceiling. Remove captive installation screws and install bracket.

Patent pending

A

UL LISTED

SP

Arlington

1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717
Fax 570/562.0646
www.aifittings.com