

KT-BLED-PLATE-KIT-X



RETROFIT PLATE

DESCRIPTION

Retrofit plate | Includes adaptor, cover, and hardware | Used with legacy 8" and 10" bollards | Bronze and black finish options available



SPECIFICATIONS

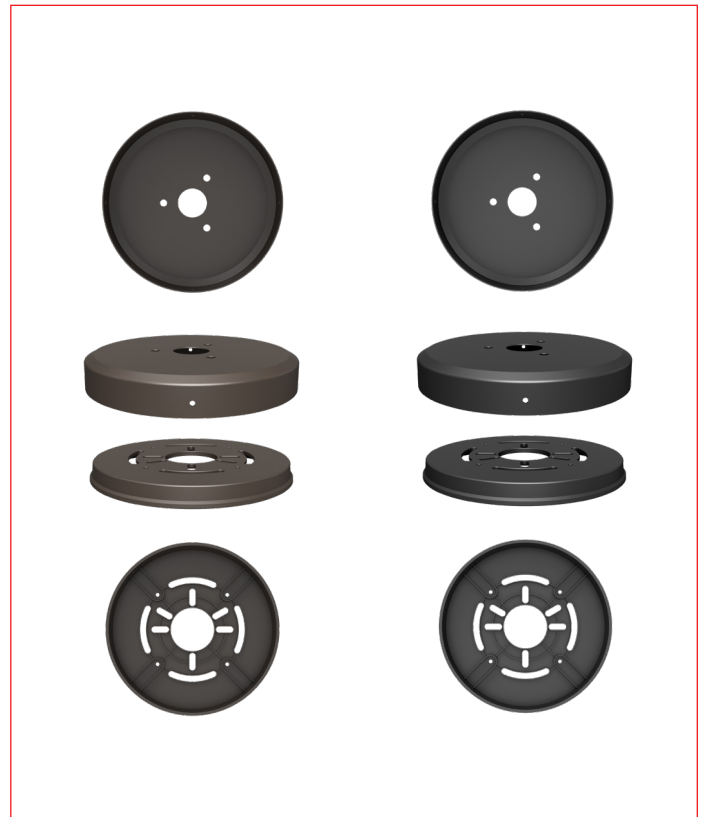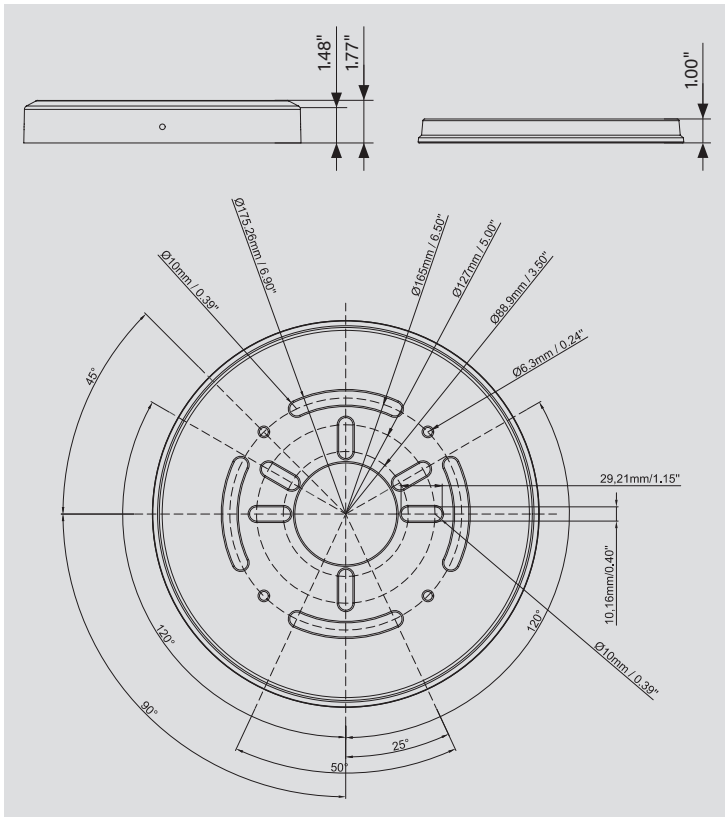


INSTALLATION INSTRUCTIONS

RETROFIT CONSTRUCTION


1. Shut off power at the source.

2. Place the mounting kit base on a prepared foundation.



Bollard kit
Prepared foundation

3. Using the level bubble on the mounting kit base, ensure that mounting kit base is level and tighten it to the foundation with four (4) M6 screws.




Level bubble

KT-BLED-PLATE-KIT-X


RETROFIT PLATE

INSTALLATION INSTRUCTIONS (CONTINUED)

4. Place the mounting cover over the mounting kit base and tighten it with four (4) M16 screws.

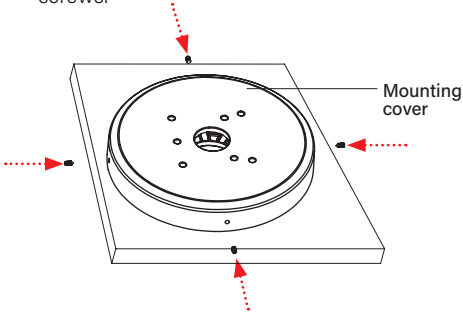


5. Position the body mounting base over mounting kit cover and, to secure the body mounting base to the foundation, place hardware in this order:
- three (3) M10 flat washers,
 - three (3) M10 spring washers, and
 - three (3) M10 screws
- Tighten all hardware.

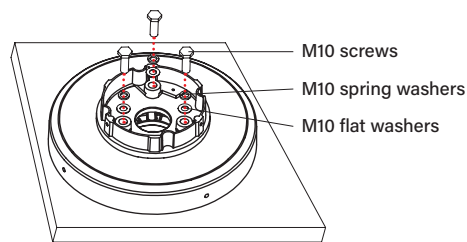


7. Affix bollard head to bollard base and make connections to the terminal block.
(see BOLLARD HEAD INSTALLATION on page 7 of *INSTALLATION INSTRUCTIONS*)

8. Reconnect the bollard body to the mounting base, tightening the three (3) screws on the side of the body mounting base to complete the installation.
Restore power.



6. Connect the source wires to the body mounting base (see **Mounting Base with Terminal Block** on page 2).

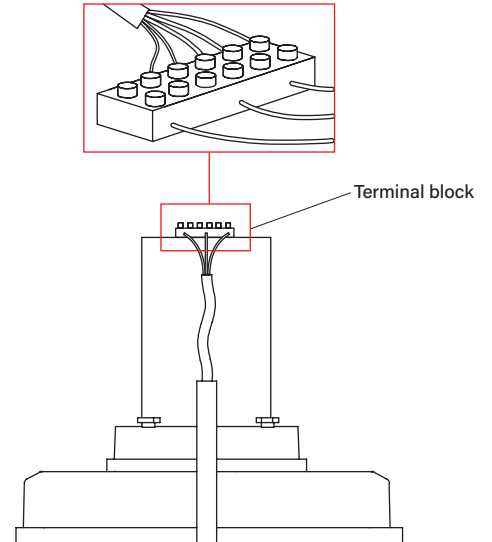



KT-BLED-PLATE-KIT-X

RETROFIT PLATE

ORDERING INFORMATION

ORDER CODE	UPC	Easy Code	Finish Color
KT-BLED-PLATE-KIT	843654162911	DGW-15	Bronze
KT-BLED-PLATE-KIT-B	843654162928	GVP-48	Black

CATALOG NUMBER BREAKDOWN

KT-BLED-PLATE-KIT-X

1	2	3	4	5	6
---	---	---	---	---	---

- 1 Keystone Technologies
- 2 Fixture Type
- 3 LED Technology
- 4 Retrofit Plate
- 5 Kit
- 6 Housing Color

2 Fixture Type

B	Bollard
---	---------

6 Housing Color

	Bronze
B	Black