

KT-LED10DL-4CA-830-DIM-CS

4" CONTRACTOR PRIME SURFACE MOUNT DISK LIGHT

DESCRIPTION

4" Circular LED Residential Retrofit Disk Light

APPLICATION

Ideal for residential, hospitality, retail, and other retrofit and new construction applications




PRODUCT FEATURES


- Ideal for retrofit, new construction, and remodel applications
- Flush-mount offers clean, modern appearance
- Diffused lens reduces glare
- Powered by Keystone TRIAC dimming LED driver; 10–100% dimming
- Ambient operating temperature: -25°C/-13°F to 40°C/104°F
- Suitable for use in wet locations
- Power factor: > 0.70
- FCC Part 15, Subpart B, Class B

PERFORMANCE SPECIFICATIONS

Catalog Number	Input Voltage	Wattage	CCT	Lumen Output	Efficacy	CRI	Beam Angle	Lifetime
KT-LED10DL-4CA-830-DIM-CS	120V	10W	3000K	750	75 lm/W	>80	110°	11,000 hrs

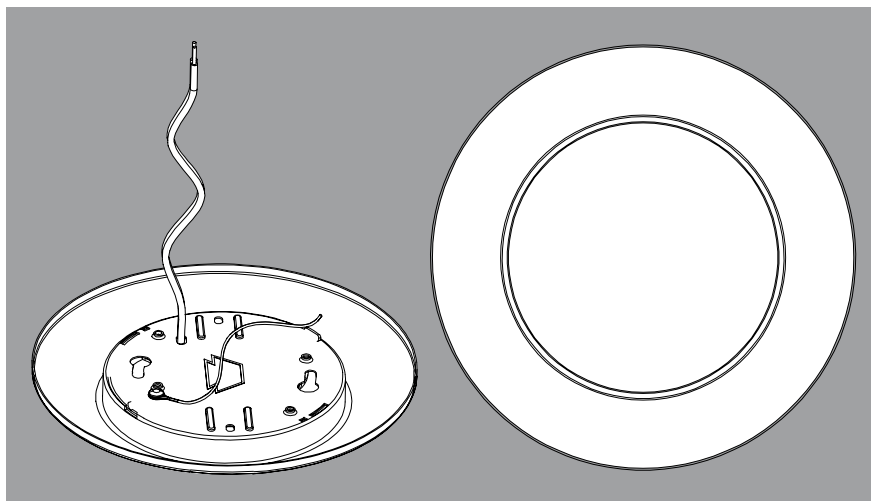

GENERAL WIRING DIAGRAM

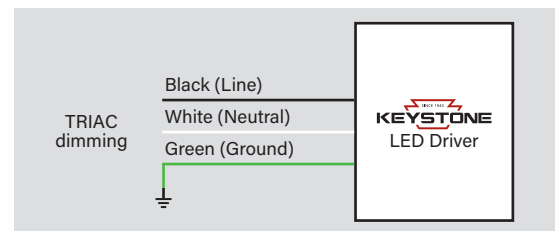


KT-LED10DL-4CA-830-DIM-CS


4" CONTRACTOR SERIES SURFACE MOUNT DISK LIGHT

PHOTOMETRIC SPECIFICATIONS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

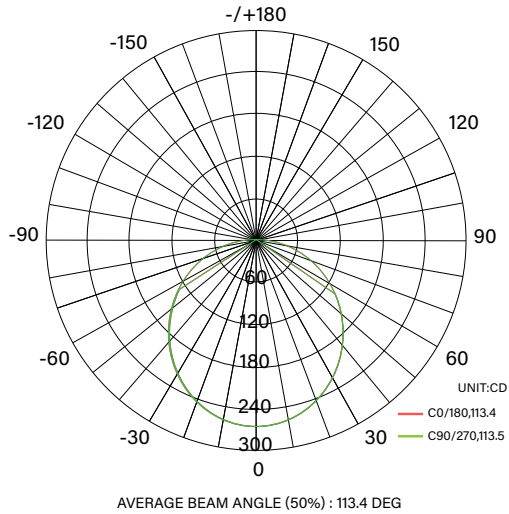


IsoLux Plots

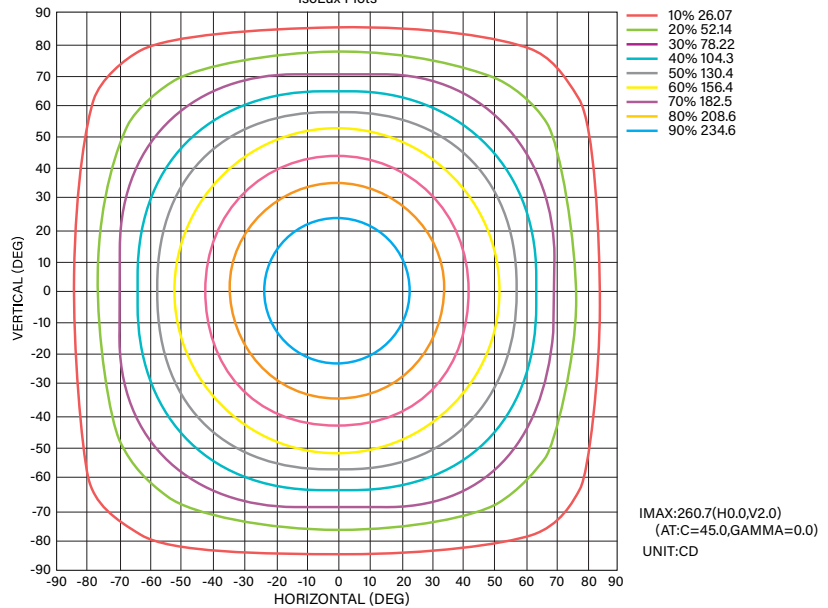


AVERAGE ILLUMINANCE EFFECTIVE FIGURE

Flux out:553.5 lm

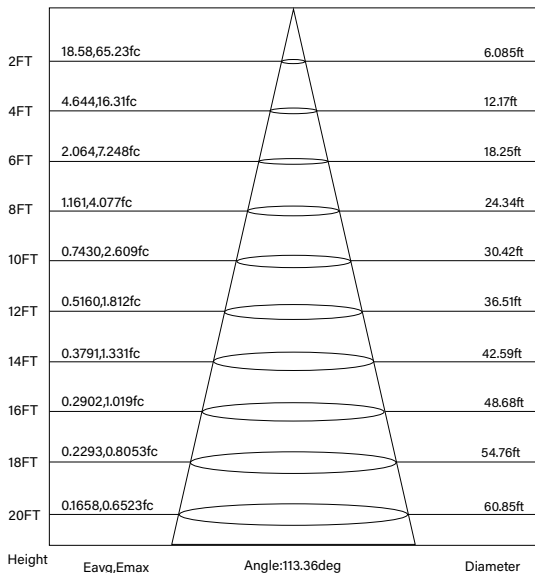


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

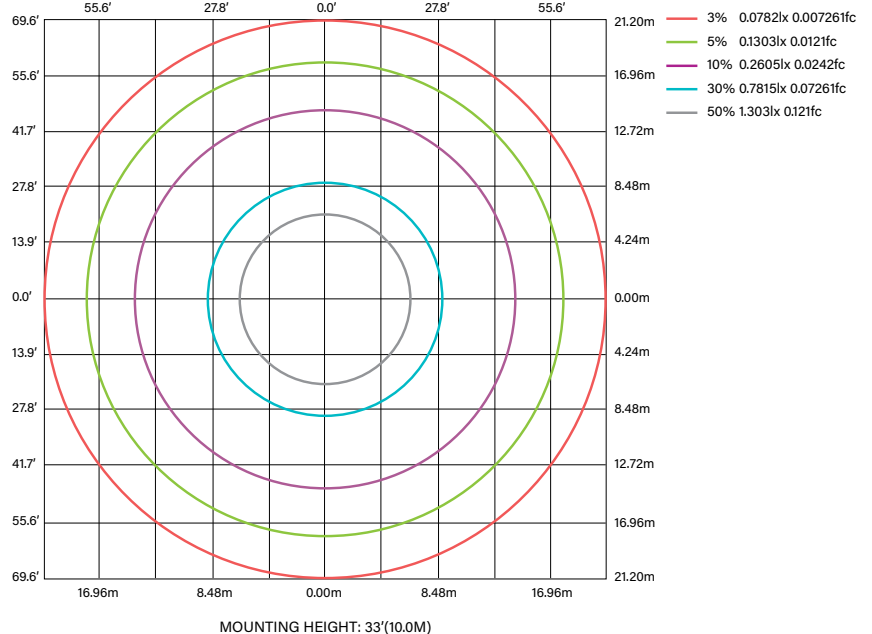

KT-LED10DL-4CA-830-DIM-CS


4" CONTRACTOR SERIES SURFACE MOUNT DISK LIGHT

PHYSICAL SPECIFICATIONS

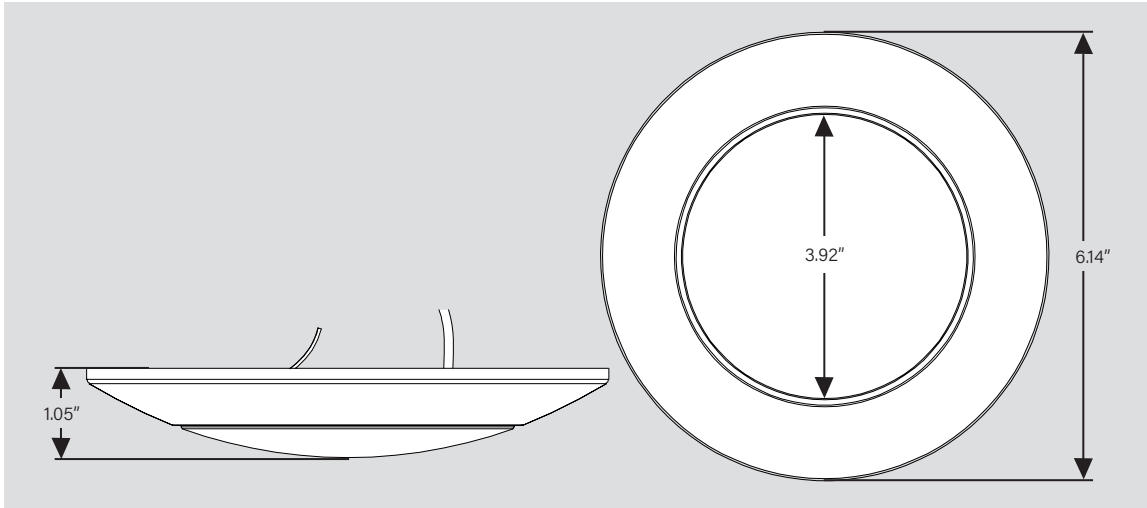

INSTALLATION INSTRUCTIONS


1. Connect the luminaire to supply wires with the wire nuts (included).

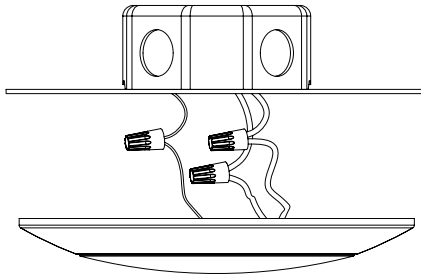


2. Remove lens by turning counter clockwise to unlock.



3. Safely place all wires into the junction box, mount luminaire to the junction box and screws through the keyhole slots. 4" luminaires are compatible with 2.75" junction boxes.

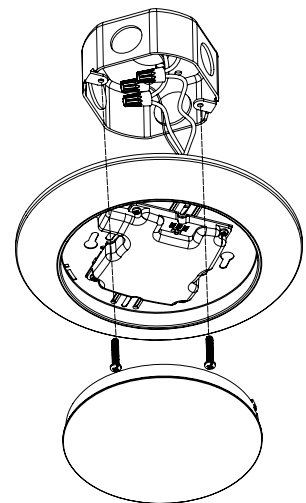

4. Replace lens and twist clockwise to lock.

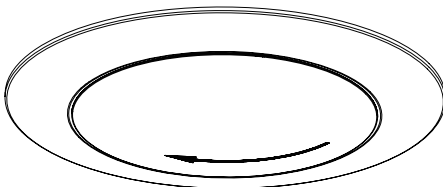



KT-LED10DL-4CA-830-DIM-CS

4" CONTRACTOR SERIES SURFACE MOUNT DISK LIGHT

ORDERING INFORMATION

Catalog Number	UPC	Easy Code
KT-LED10DL-4CA-830-DIM-CS	843654156897	RVB-56

CATALOG NUMBER BREAKDOWN

KT-LED10DL-4CA-830-DIM-CS

1	2	3	4	5	6	7	8	9	10	11
---	---	---	---	---	---	---	---	---	----	----

1 Keystone Technologies	4 Fixture Type	5 Nominal Size	6 Shape
2 LED Technology	DL Disk Light	4 4" Nominal	C Circular
3 Wattage			
4 Fixture Type	7 Designation	10 Dimming	
5 Nominal Size	A Series A Design	DIM TRIAC Dimmable	
6 Shape			
7 Designation			
8 80 CRI			
9 CCT			
10 Dimming			
11 Contractor Series			